
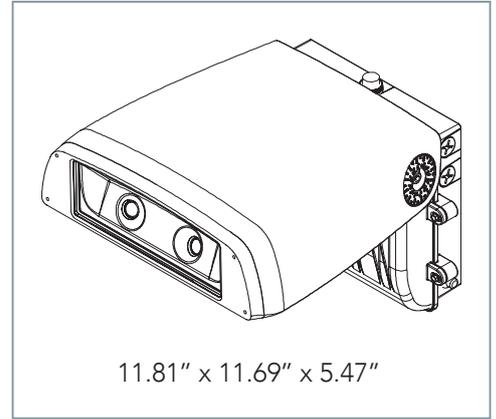


MOUNTING INSTRUCTIONS WALL PACK LIGHT

SUITABLE FOR WATTAGES: 40W, 50W & 78W

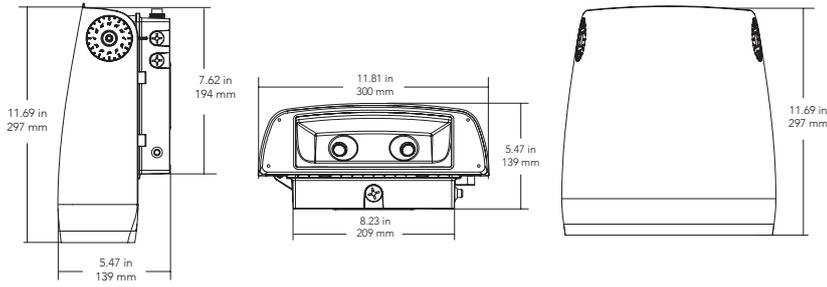




IMPORTANT: READ BEFORE REMOVING FIXTURE FROM CARTON. RETAIN FOR FUTURE REFERENCE.

This fixture must be wired and installed in accordance with the NATIONAL ELECTRICAL CODE and all state and applicable local codes and ordinances. These codes and ordinances supersede any and all instruction contained herein. Installation should be performed only by a licensed and bonded electrician and a person familiar with the construction and operation of the product and the hazards involved in the installation and operation of this product. Proper grounding is required for safety. Make certain power is OFF before installing or maintaining fixture. Failure to do so may increase the RISK OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE, AND DEATH. The manufacturer takes no responsibility for the product not installed under those guidelines and those contained in this document. See wiring diagram on back.

CAUTION: For proper weatherproof function all gaskets must be seated properly and all screws inserted and tightened firmly. Apply weatherproof silicone sealant (NOT included) around the edge of the Wall Box and/or Junction Box. This is especially important with an uneven wall surface. Silicone all plugs and unused conduit entries.


MOUNTING INSTRUCTIONS:

1. Loosen Allen screw on side of fixture and adjust angle to gain access to back box door. Screws will remain in place (FIG. 1)
2. Unscrew side fixture screw to remove door from back box. Refer to (FIG. 3-W). Confirm junction box size PRIOR to removing the gasket material for the application. ONLY remove the gasket material needed for the installation. Mount back box to junction box via supplied hardware or lag mount. Utilize any junction box pairings for lag mount. Lag mount hardware provided by others (FIG. 3)
3. Knock out appropriate Slots when mounting to junction box (not supplied) or lag bolt to mounting surface using location noted below (FIG. 4)
4. Feed supply wires through Junction Box (not supplied). Check that the Gasket is fully sealed (FIG. 4)
5. Secure door in lock hinges located at the left or right of the box just like illumination. (FIG. 2) Loosen four front screws in order to connect with the junction box. All electrical connections must remain inside back box. Secure any loose wires to harness prior to closing and securing door. Tighten door screw to seal fixture

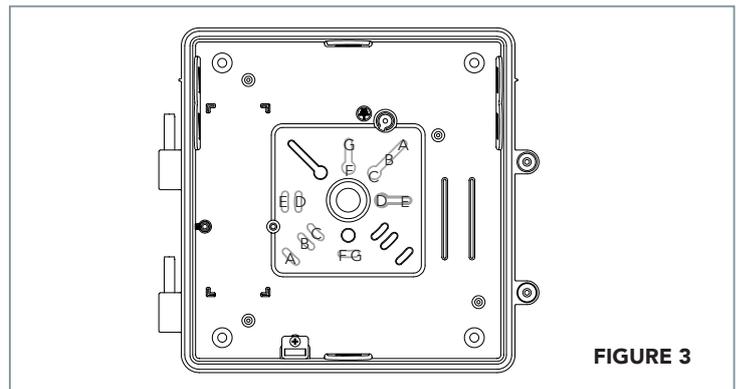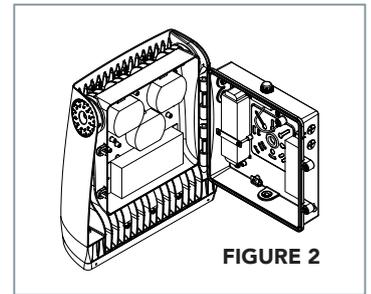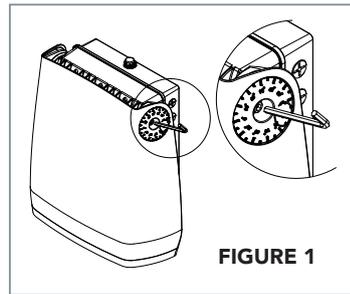

JUNCTION BOX MOUNTING GUIDE: (FIG. 3)

A-A	4" SQUARE BOX	E-E	4" ROUND BOX
B-B	4" OCTAGONAL BOX	F-F	2 3/4 HOLE PATTERN
C-C	3 1/2 SQUARE/OCTAGON BOX	G-G	SINGLE GANG
D-D	MASONRY BOX		

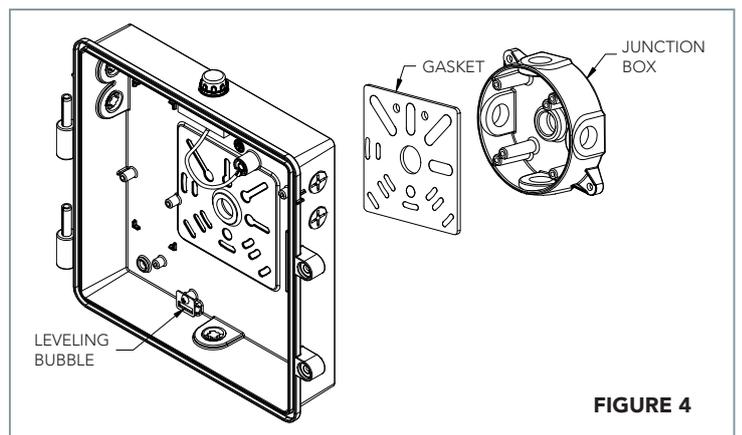

FIXTURE IS SUITABLE FOR WET LOCATION

MOUNTING INSTRUCTIONS

WALL PACK LIGHT

SUITABLE FOR WATTAGES: 40W, 50W & 78W

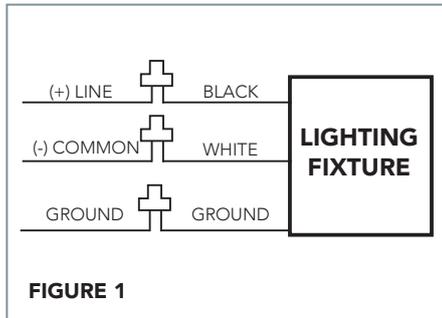


FIGURE 1

ON-OFF WIRING METHOD:

Universal voltage driver permits operation at 120V through 277V, 50 or 60 Hz. Units ordered with (480V) suffix are 480V, 60Hz. For Non-Dimming, follow the wiring directions as in FIG. 1

1. Connect the GROUND wire from fixture to supply ground
2. Connect the white fixture lead to the (-) COMMON supply lead
3. Connect the black fixture lead to the (+) LINE supply lead

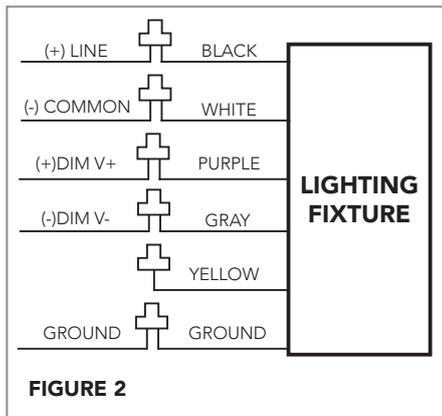


FIGURE 2

0-10V DIMMABLE WIRING METHOD:

Universal voltage driver permits operation at 120V through 277V, 50 or 60 Hz. For 0-10V Dimming, follow the wiring directions as in figure 2

1. Connect the GROUND wire from fixture to supply ground
2. Connect the white fixture lead to the (-) COMMON supply lead
3. Connect the black fixture lead to the (+) LINE supply lead
4. Connect the purple fixture lead to the (V+) DIM lead
5. Connect the gray fixture lead to the (V-) DIM lead
5. Cap the yellow fixture lead, if present. DO NOT connect

TROUBLESHOOTING:

1. Check that the line voltage at fixture is correct
2. Is there voltage at the lamp fixture wires? If there is no voltage, check all connections
3. Ensure that the fixture is grounded properly