


# TECHNICAL BULLETIN

Updating CP-100 Gateway Firmware  
Date: 5/6/2020

Chilicon Power is continuously working to provide the most user-friendly and feature rich gateway available. Toward this end, Chilicon Power periodically modifies the gateway firmware to either add new features or correct reported deficiencies. To assure that all deployed gateways have the current firmware version, the company recommends updating the gateway at the time of install.

The update process is simple and accomplished via the developer menu. Make sure the gateway is first connected to the Chilicon Power cloud by either an ethernet cable or wifi at the time. Follow the steps below:

- 1) On the initial display page, touch the menu button at the lower right.
- 2) Next touch the upper left corner of the screen. Located there is a “hidden” button which activates the “Developer Main Menu” screen. If prompted for a password, type in “revolution”. For reference, the current firmware version is listed on the fourth line down on the left.

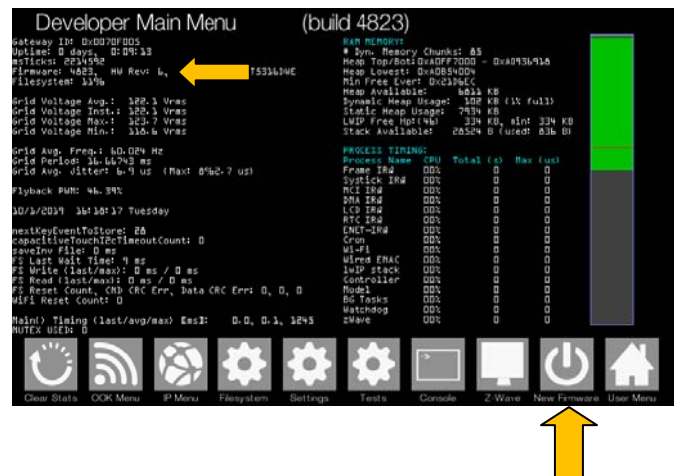

- 3) On this screen select the New Firmware button at the bottom.
- 4) The gateway will now load the latest firmware version and then restart.