
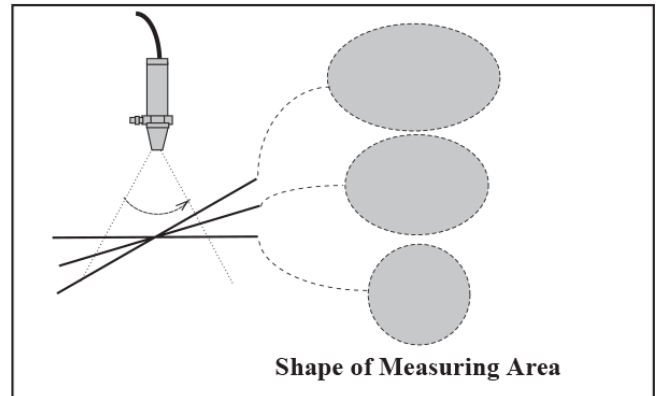


IRT/C CAN MEASURE OBLIQUELY

Often, an area needs to be temperature monitored, but because of space limitations, the IRT/c cannot be placed to view the target area squarely. In such situations the IRT/c can be angled obliquely to view the target area. The field-of-view then becomes elliptical instead of circular, and the IRT/c averages the temperature it sees.

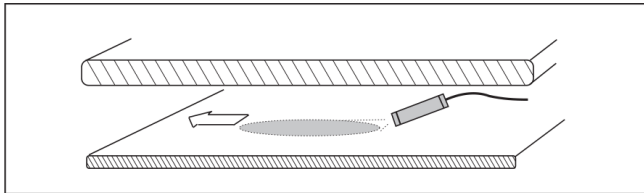

To apply this method, be sure to estimate the size of the field-of-view footprint, and confirm that the IRT/c is measuring the area you wish to measure.

Exergen Global offices:

The Netherlands
Pastoor Clercxstraat 26
5465 RH Veghel
Tel: +31(0) 413 37 65 99
Fax: +31(0) 413 37 93 10

USA
400 Pleasant Street
Watertown, MA 02472
Tel: +1 617 649 6322
Fax: +1 617 923 9911

office@exergenglobal.com
www.exergenglobal.com