


IRT/C.5

Product Overview

The IRT/c.5 features:

- Infrared Thermocouple IRT/c
- Non-contact
- Self-powered
- Intrinsically Safe
- Repeatability 0.02°F (0.01°C)
- Interchangeability ±1%
- Resolution approx. 0.0001°C
- Small Size

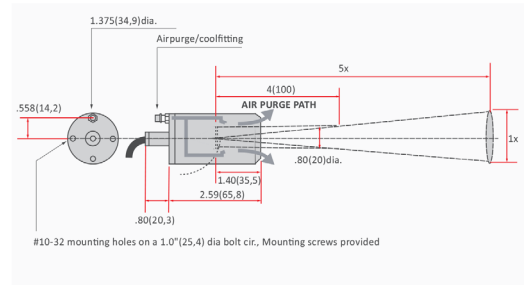


Technical Data

Sensing Range	-50 to 1200°F (-45 to 650°C)	Dimensions	3.4" x 1.375" Dia. (86 x 35mm)
Ambient Temperature Range	0 to 400°F (-18 to 200°C)	Housing	Stainless steel, hermetically sealed, exceeds NEMA 4,4X; IP65, 67, cable shield grounded to housing and electrically isolated from signal
Optimum Range Selections	Eight models per t/c type (see Temperature Selection Chart)	Cable	Twisted shielded pair of base thermocouple material (J,K,E,T), 3ft (.9m) std length, Teflon sheathed, rated to 392°F (200°C) continuous service
Field of View	approximately 5:1 (11°)	Weight	6.5oz. (184 grams) with cable
Minimum Spot Size	.8" (20mm)	Air Purge	Built-in; designed for severe paint or ink environment; 3' (0.9 m) of tubing provided
Spectral Response	6.5 to 14µm		
Output Impedance	4 to 8 Kohms approx		
Response Time	100 Milliseconds		

Calibration

Ordering information **IRT/c.5-*** (Thermocouple Type) - (Pre-calibrated Temperature Range). Thermocouple type J,K,E,T over temperature range specified.

Temperature Selection Chart

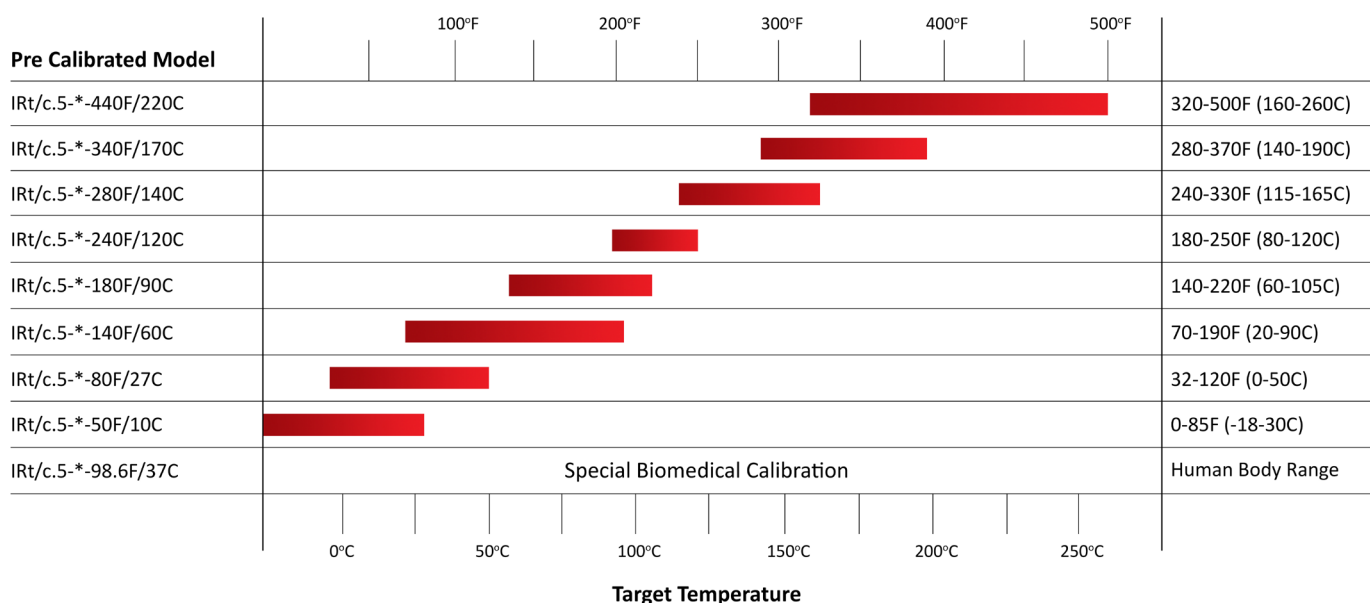

Exergen Global offices:

The Netherlands
 Pastoor Clercxstraat 26
 5465 RH Veghel
 Tel: +31 (0)413 376 599
 Fax: +31 (0)413 379 310

USA
 400 Pleasant Street
 Watertown, MA 02472
 Tel: +1 617 649 6322
 Fax: +1 617 923 9911

Specifications subject to change without notice

office@exergenglobal.com
 www.exergenglobal.com