
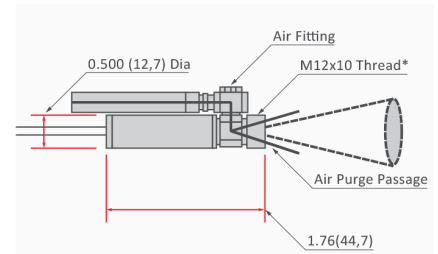


AUTOSMART 3X

Product Overview

The AutoSmart 3X features:

- Output 0-5V, 0-10V, 4-20mA
- Non-contact
- Repeatability error 0.1% full scale
- Interchangeability $\pm 1.5\%$ full scale
- Resolution approx. 0.1°C
- Small size sensor




*IRT/c.3X includes ss mounting bracket & locknuts
Dimensions are in inches (mm)

Technical Data


Sensing Range	-31 to 932°F (-35 to 500°C)
Sensor Ambient Temperature Range	0 to 212°F (-18 to 100°C)
Transmitter Ambient Temperature Range	32 to 158°F (0 to 70°C)
Storage Temperature Range	14 to 158°F (-10 to 70°C)
Field of View	3:1 (17°) approximately
Minimum Spot Size	0.25" (6mm)
Spectral Response	5.0 to 20 μ m
Update Time	Approximately 250 msec.
First Reading Upon Power Up	Approximately 2 seconds
Air Purge	Built-in; designed for severe paint or ink environment

Cable	1. 9.8ft (3M) 22AWB*4C + F + Jacket black PUR cable OD=5.0mm -40°C~+105°C 2. 3ft (0,9M) Twisted shielded pair of base thermocouple material (J,K,E,T) Teflon sheathed, rated to 392°F (200°C) continuous service
Sensor Dimensions	1.76" x 0.50" Dia. (44.7 x 12.7mm)
Weight	Sensor: 1.4oz (40g) with cable. Transmitter: Approximately 1.702oz. (50g)
Housing	Sensor: Stainless steel, hermetically sealed, exceeds NEMA 4,4x; IP65,67, cable shield grounded to housing and electrically isolated from signal. Transmitter: Heavy Duty SS, NEMA, IP54
Emissivity Setting	0.90
Power	12 or 24VDC (10%). Shuts off when voltage is functionally low
Power Consumption	± 10 mA (without output signal device)
Loop Impedance	(4-20mA models) >500 Ω

Ordering Information

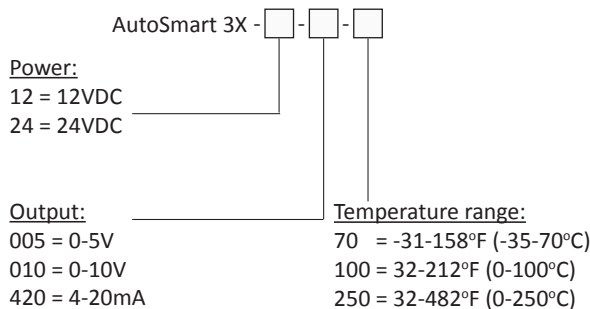

Dimensions

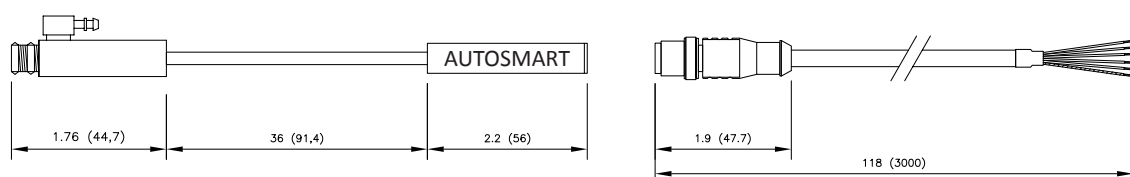

Exergen Global offices:

The Netherlands
Pastoor Clercxstraat 26
5465 RH Veghel
Tel: +31 (0)413 376 599
Fax: +31 (0)413 379 310

USA
400 Pleasant Street
Watertown, MA 02472
Tel: +1 617 649 6322
Fax: +1 617 923 9911

Specifications subject to change without notice

office@exergenglobal.com
www.exergenglobal.com

DS-912-EN-V2