





# REKOLA

## Rekola Reflex AquaPlus

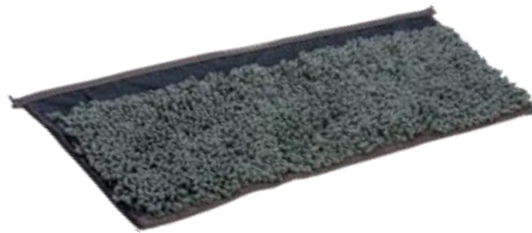

Product code	Color code	Dimension	
10-0057	grey	57 x 18 cm	<b>Rekola Reflex</b> fringe mop with 17 lanes Polyester yarn 150D*x 30= 4500 D, tufted loops on Polyester/Cotton 70/30% canvas Multiple use 195 grs 4 Color tagged.
<b>Packed</b>	5 pcs pp bag 		20 pcs 5-pack per transport box
<b>Where:</b>	All smooth and sealed hard top floorings for cleaning results: e.g. school, university, office, public building, hospitality, residential areas. Especially for dusting, waxing and entrance cleaning at winter circumstances.		
<b>How:</b>	In conjunction with <b>Rekola Reflex</b> 50 cm squeegee and <b>Rekola Reflex</b> 100/180 extendable handle. For preparation on a cleaning trolley <b>charge cloths in a closed container</b> such as a 14 Ltr. rectangle box with lid. Put the cloths inside and pour the desired fluid equally over the cloths, leave for a while with closed lid. <b>Alternatively charge cloths in a washing machine</b> , by adapting the spin cycle of the final rinse. <b>Avoid</b> overdosing, bleach and softeners		
<b>Charge:</b>	With clean water; optional diluted with Polyester suitable chemical according to manufacturer's instructions. <i>Please be aware that some chemicals may cause damage to user, material and environment.</i> Depending on floor circumstances charge the cloths with 300-500 ml per cloth. <b>Regardless of the charging liquid: avoid overdosing.</b>		

# REKOLA

Maintenance	
<b>Laundry:</b>	
<b>Washing:</b>	Rinse twice to ensure all cleaning chemicals are removed. Main program for synthetic fibers at 95°C, for environmental reasons at 60° C or less is preferred. Rinse twice to ensure all laundry agents are removed. Adjust temperatures and water volumes accordingly.
	Tumble dry at low heat.
	Do not use of bleach or softener.
	Low water level during processing or overloading washing machine (max 80% of door window) may cause irreversible damage to cloths.
<b>Disinfection:</b>	Non –bleach disinfectant* laundry agent and autoclaving may be used if required *e.g. peroxide based; this may affect colors.
<b>Durability:</b>	500 washing cycles. Rough surfaces like safety flooring will reduce lifetime expectations.
<b>Disposable:</b>	Rekola Reflex AquaPlus mops are purely synthetic: may be used for recycling programs; or because of their high energy value and with no emissions other than CO <sub>2</sub> and water can be safely disposed by controlled energy-supply programs.
Components	
<b>Body:</b>	<b>100% PES loops</b> 150*30= 4500 D tufted on 80/20% Polyester/Cotton canvas.
<b>Borders:</b>	<b>100% PES.</b>
Characteristics	
<b>Shrinkage:</b>	< 6% at recommended washing instructions.
<b>Non-Touch</b>	In conjunction with Rekola Reflex squeegee tool, dirty cloths are not touched when demounting.
<b>Patent:</b>	FI2010000028 Floor Maintenance Device and Cloth.
Guarantee	
500 times use and wash in general hygiene cleaning circumstances at a maintained non-safety sealed floor. Extended usage can be achieved if optimal laundry and cleaning conditions are considered. For instruction and details ask your distributor.	