



REMARK : RoHS REQUIREMENT APPLIED
(符合RoHS)

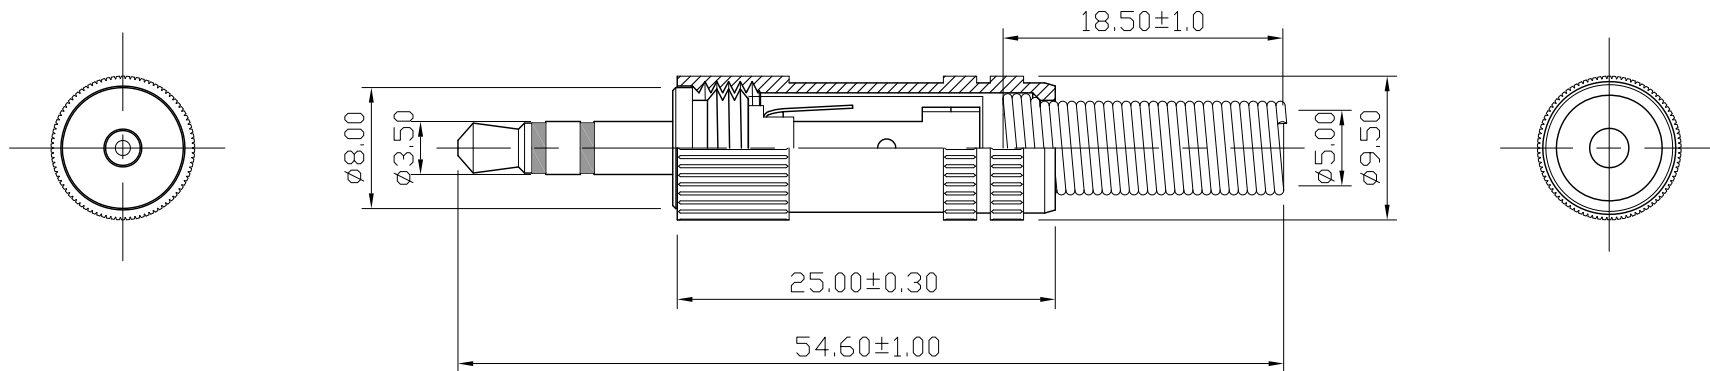

S 1 : 1

| - | spring | 1 | iron | gold | |
|-----|-------------|------|-----------|-------------|-------------|
| - | sleeve | 1 | pvc | transparent | |
| - | insulator | 2 | POM | black | |
| - | solder tab | 1 | brass | gold | |
| - | solder tab | 1 | brass | gold | |
| - | clip | 1 | brass | gold | |
| - | insulator | 2 | POM | white | |
| - | shell | 1 | brass | gold | |
| - | contact pin | 1 | brass | gold | |
| - | body | 1 | brass | gold | |
| - | body | 1 | brass | gold | |
| - | body | 1 | brass | gold | |
| NO. | Description | Unit | Materials | Finish | Drawing No. |

DIMENSIONS ARE IN
MILLIMETERS

UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

CHECKED

DRAWN

Lala

DATE

2007. 12. 28



雅鈦企業有限公司
Aec Connectors Co., Ltd.

TITLE

AUDIO PLUG

DRAWING NO.

AP3.5-251GG-Stereo-5.0

FILE NO.

DRAWING\AUDIO\AP\AP3.5-251GG-Stereo-5.0

SCALE

2 : 1

UNIT

MM