

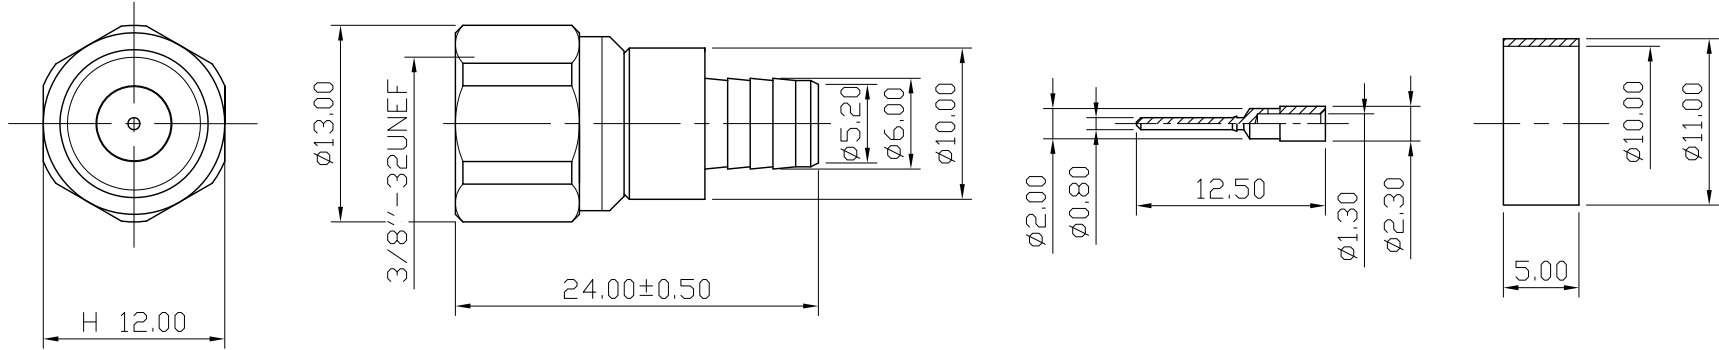


No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------




Electrical Characteristics :

1. Frequency Range : DC ~ 2700MHz
2. Impedance : 75 ohm
3. VSWR : 1.3 max. (for 5C-FB CABLE)
1.5 max. (for 5C-2V CABLE)
4. Contact Resistance : contact pin < 5 mohm
body < 5 mohm
5. Dielectric Withstanding Voltage : 500VAC / 1minute
6. Insulation Resistance : 500 Mohm min. / 500VDC

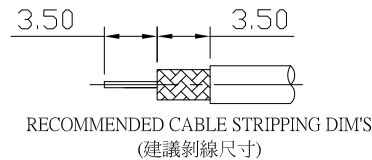

S 1 : 1

-						DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°	CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.	
-	ferrule	1	brass	nickel	FSFE0001BR-N		DRAWN <i>Jordan</i>		TITLE F CONNECTOR FOR 5C-FB&5C-2V
-	contact pin	1	brass	gold	FSCP0001BR-G				DRAWING NO. FS-1028NTG-SC5117
-	shell	1	brass	nickel	FSSL0001BR-N		DATE 2015. 10. 07	FILE NO. DRAWING\RF\FS\FS-1028NTG-SC5117	
-	washer	1	brass	nickel	FSWR0001BR-N				
-	insulator	1	PTFE	white	FSIR0001TF				
-	body	1	brass	nickel	FSBY0001BR-N				
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	2 : 1	UNIT	MM