




No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

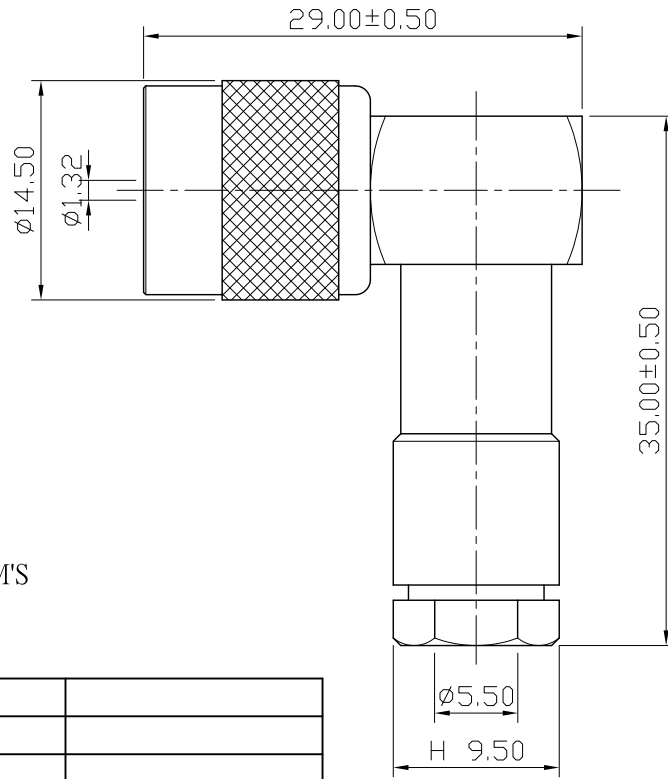

RECOMMENDED CABLE STRIPPING DIM'S
(建議剝線尺寸)




S 1 : 1

-	contact pin	1	brass	gold	
-	insulator	1	P.P	white	
-	top hat	1	brass	nickel	
-	gasket	1	rubber	red	
-	washer	1	brass	nickel	
-	screw	1	znic alloy	nickel	
-	body	1	brass	nickel	
-	contact pin	1	brass	gold	
-	insulator	1	POM	white	
-	gasket	1	rubber	red	
-	washer	1	steel	nickel	
-	washer	1	brass	nickel	
-	washer	1	steel	nickel	
-	body	1	brass	nickel	
-	shell	1	brass	nickel	
NO.	Description	Unit	Materials	Finish	Drawing No.

DIMENSIONS ARE IN MILLIMETERS		
UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差)		
0.5~6	= ±0.2	
>6~30	= ±0.4	
>30~120	= ±0.6	
>120~315	= ±1	
>315~1000	= ±1.6	
ANGLES(角度) = ±5°		
SCALE	2 : 1	UNIT MM

CHECKED
DRAWN <i>Tina</i>
DATE 2012. 07. 05

 雅鈦企業有限公司 Aec Connectors Co., Ltd.	TITLE RIGHT ANGLE TNC MALE CLAMP FOR RG-142/U, 223/U
	DRAWING NO. TC-1007NDG-RD2315
	FILE NO. DRAWINGRFTVC/TC-1007NDG-RD2315