


No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

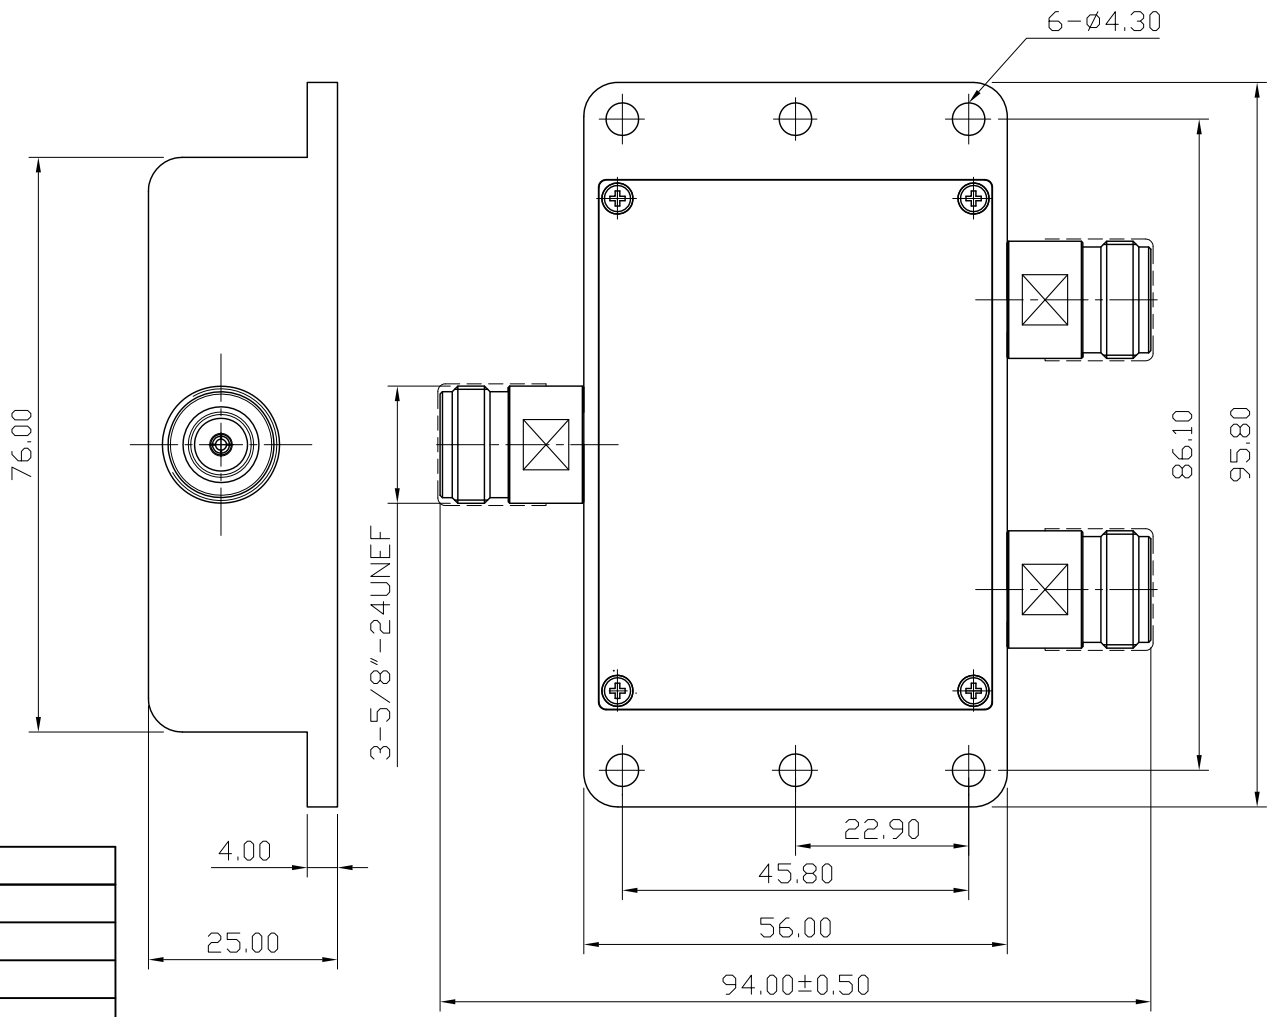


Electrical Characteristic:
 1. Frequency Range: 698~2700 MHz
 2. Impedance: 50 ohm
 3. Insertion Loss: 0.3dB max.
 4. Isolation: 20dB min.
 5. Input VSWR: 1.25 max.
 6. Output VSWR: 1.2 max.

12	cover	3	rubber	black	
11	washer	6	iron	nickel	
10	spring	8	iron	nickel	
9	screw	8	iron	nickel	
8	screw	4	iron	nickel	
7	resistor	4	alumina substrate	none	
6	pcb	1	PTFE	none	
5	contact pin	1	brass	gold(3u")	
4	insulator	1	PTFE	white	
3	body	1	brass	nickel	
2	cover	1	aluminum	sandblast black coated	
1	shell	1	aluminum	sandblast black coated	
NO.	Description	Unit	Materials	Finish	Drawing No.

DIMENSIONS ARE IN MILLIMETERS
 UNLESS OTHERWISE SPECIFIED
 TOLERANCES
 (一般公差)
 0.5~6 = ±0.2
 >6~30 = ±0.4
 >30~120 = ±0.6
 >120~315 = ±1
 >315~1000 = ±1.6
 ANGLES(角度) = ±5°

CHECKED

 DRAWN
Jordan
 DATE
2016.08.10

 雅鈦企業有限公司
 Aec Connectors Co., Ltd.

TITLE
POWER SPLITTER

DRAWING NO.
PD-1002S-NS25TA-NS25TA

FILE NO. DRAWING\RF\PD\PD-1002S-NS25TA-NS25TA