



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

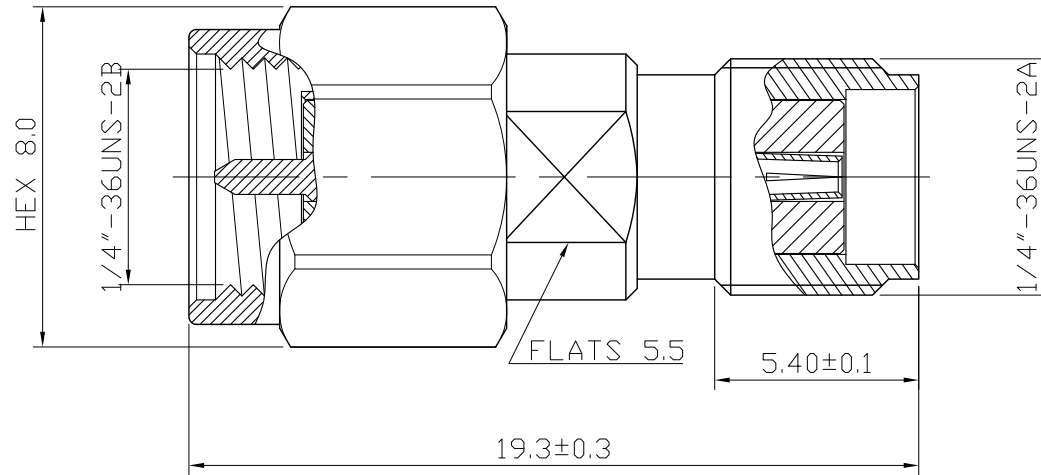


Electricals:

1. Impedance: 50 ohms
2. Frequency Range : DC~18.0 GHz
3. V.S.W.R.: 1.25 max.
4. Working Voltage: 750V rms min.
5. Insulator Resistance: 5000 MΩ min.



S 1 : 1

						DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°	CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.	
6	contact pin	1	beryllium copper	gold (3u")	SA03BE072A		DRAWN <i>Chad</i>		TITLE SMA PLUG TO SMA JACK STRAIGHT ADAPTOR
5	insulator	1	PTFE	none	SA02TF053A				DATE 2014. 03. 27
4	body	1	brass	gold	SA01BR083A			FILE NO. DRAWING\RFADT\ADT-2237SA-SA15TG-SA25TG	
3	c ring	1	sus 304	none	OT14SS018A				
2	gasket	1	silicone	red	OT12SL001A				
1	shell	1	brass	gold	SA05BR001A				
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	5 : 1	UNIT	MM