
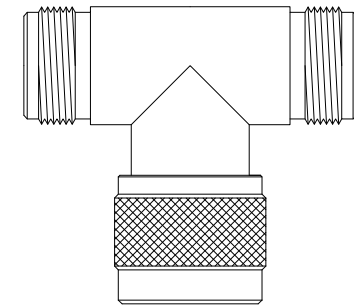


| | | | | | | |
|-----|------|-------------|-----|---|------|-------------|
| No. | DATE | DESCRIPTION | REV | REMARK : RoHS REQUIREMENT APPLIED (符合RoHS) | DATE | DRAWING NO. |
|-----|------|-------------|-----|---|------|-------------|

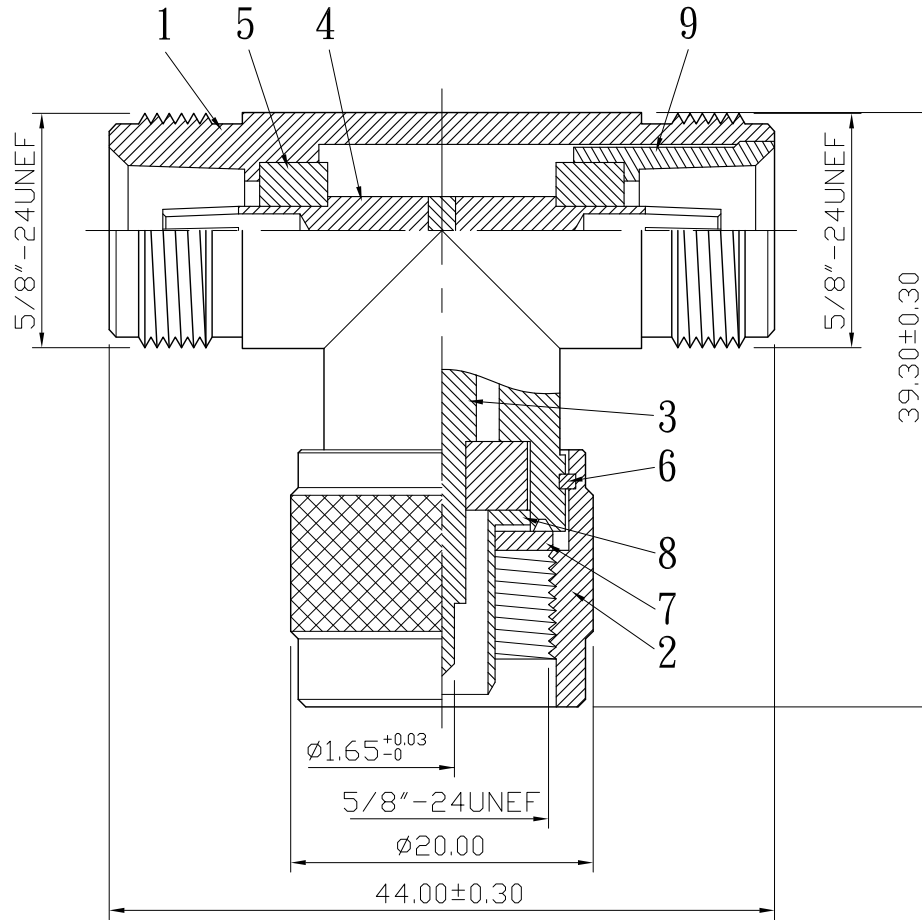

S 1 : 1

| 9 | body | 1 | brass | nickel | |
|-----|-------------|------|-----------|--------|-------------|
| 8 | body | 1 | brass | nickel | |
| 7 | gasket | 1 | rubber | red | |
| 6 | washer | 1 | brass | none | |
| 5 | insulator | 3 | POM | white | |
| 4 | contact pin | 1 | brass | gold | |
| 3 | contact pin | 1 | brass | gold | |
| 2 | shell | 1 | brass | nickel | |
| 1 | body | 1 | brass | nickel | |
| NO. | Description | Unit | Materials | Finish | Drawing No. |

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

| | | | |
|-------|-------|------|----|
| SCALE | 2 : 1 | UNIT | MM |
|-------|-------|------|----|

CHECKED

DRAWN
Lala
DATE
2008. 10. 07



雅鈦企業有限公司
Aec Connectors Co., Ltd.

TITLE
N MALE TO DOUBLE N FEMALE

DRAWING NO.
ADT-1918T-NS15DA-NS25DA

FILE NO. DRAWING\RFVADT\ADT-1918T-NS15DA-NS25DA