



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

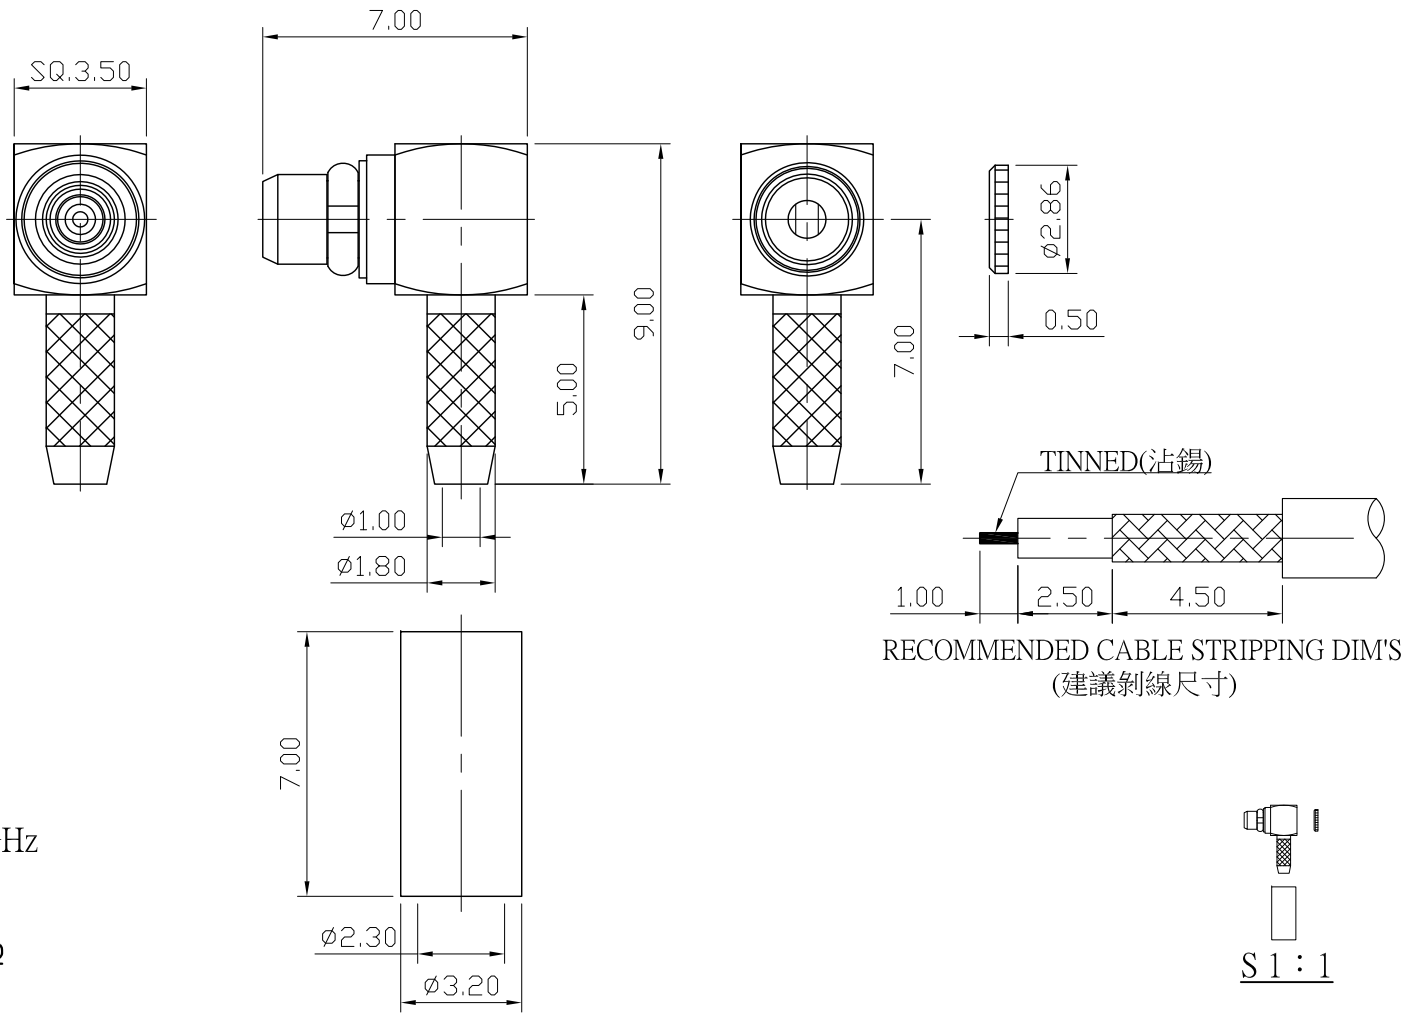

Electricals:

1. Impedance : 50 Ohms
2. Frequency Range : DC ~ 6.0 GHz
3. V.S.W.R. : 1.35 max.
4. Working Voltage : 170V rms.
5. Insulator Resistance : 1000 MΩ

-						DIMENSIONS ARE IN MILLIMETERS			CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.	
6	ferrule	1	brass	gold	OT11BR025A	UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)			DRAWN <i>Chad</i>		
5	cover	1	brass	gold	OT13BR010A	0.5~6 = ±0.2					
4	contact pin	1	beryllium copper	gold (3u")	MX03BE017A	>6~30 = ±0.4					
3	insulator	1	PTFE	none	MX02TF014A	>30~120 = ±0.6					
2	C ring	1	beryllium copper	gold	MX14BE001A	>120~315 = ±1					
1	body	1	brass	gold	MX01BR021A	>315~1000 = ±1.6			DATE 2015. 05. 19		
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	5 : 1	UNIT	MM	FILE NO. DRAWING	MX-1001AGTG-RC1835