


No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------



14	resistor	2	ceramic	tin	
13	screw	2	brass	nickel	
12	pcb board	1	FR4	tin	
11	body-f	1	brass	nickel	
10	insulator-f	1	PTFE	nature	
9	contact pin-f	1	bellium copper	gold (3u")	
8	shell	1	brass	nickel	
7	body	1	brass	nickel	
6	contact pin-sma	1	brass	gold (3u")	
5	insulator-sma	1	PTFE	nature	
4	body-sma	1	brass	nickel	
3	c ring	1	stainless steel	passivate	
2	gasket	1	silicone	red	
1	shell-sma	1	stainless steel	passivate	
NO.	Description	Unit	Materials	Finish	Drawing No.

Electrical Characteristic :
Frequency Range : DC ~ 3GHz
VSWR : 1.2:1 max.
Insertion Loss : 5.7±0.5dB

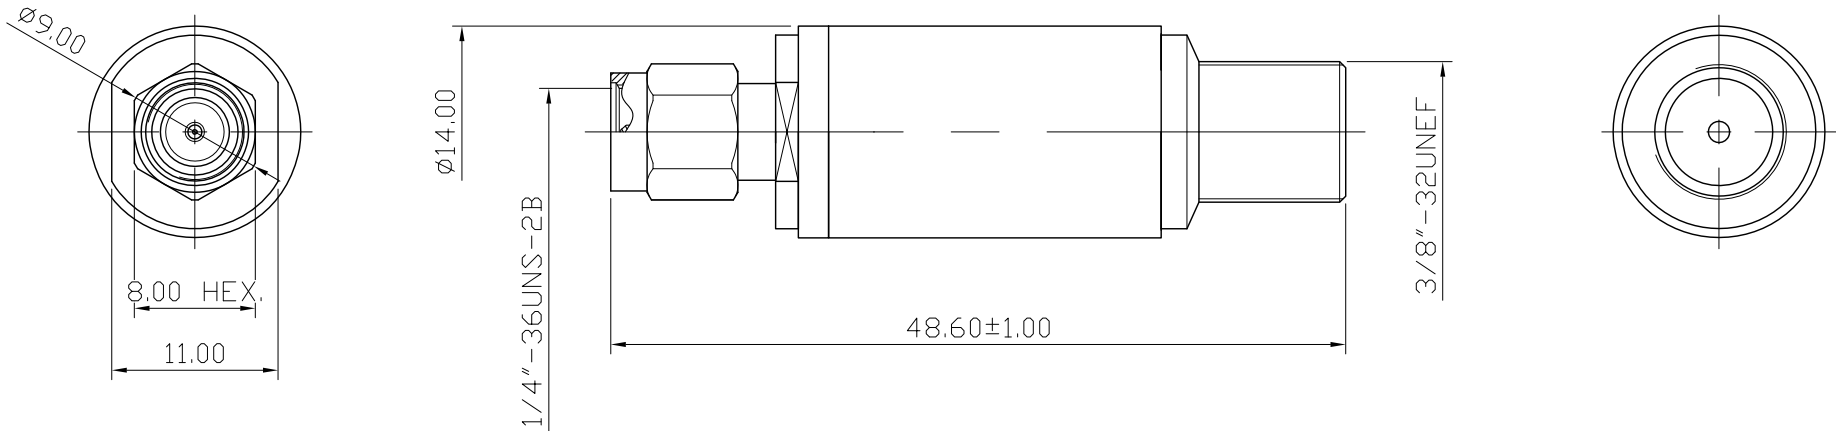

S 1 : 1

DIMENSIONS ARE IN
MILLIMETERS

UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

CHECKED

DRAWN

Jordan

DATE

2018. 03. 21



雅鈦企業有限公司
Aec Connectors Co., Ltd.

TITLE SMA PLUG 50 Ohm TO F JACK 75 Ohm
IMPEDANCE MATCHING PAD

DRAWING NO.

MP-1001S-SA15TA-FS27TA

FILE NO. DRAWINGR\FMPMP-1001S-SA15TA-FS27TA

SCALE 2 : 1 UNIT MM