




No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

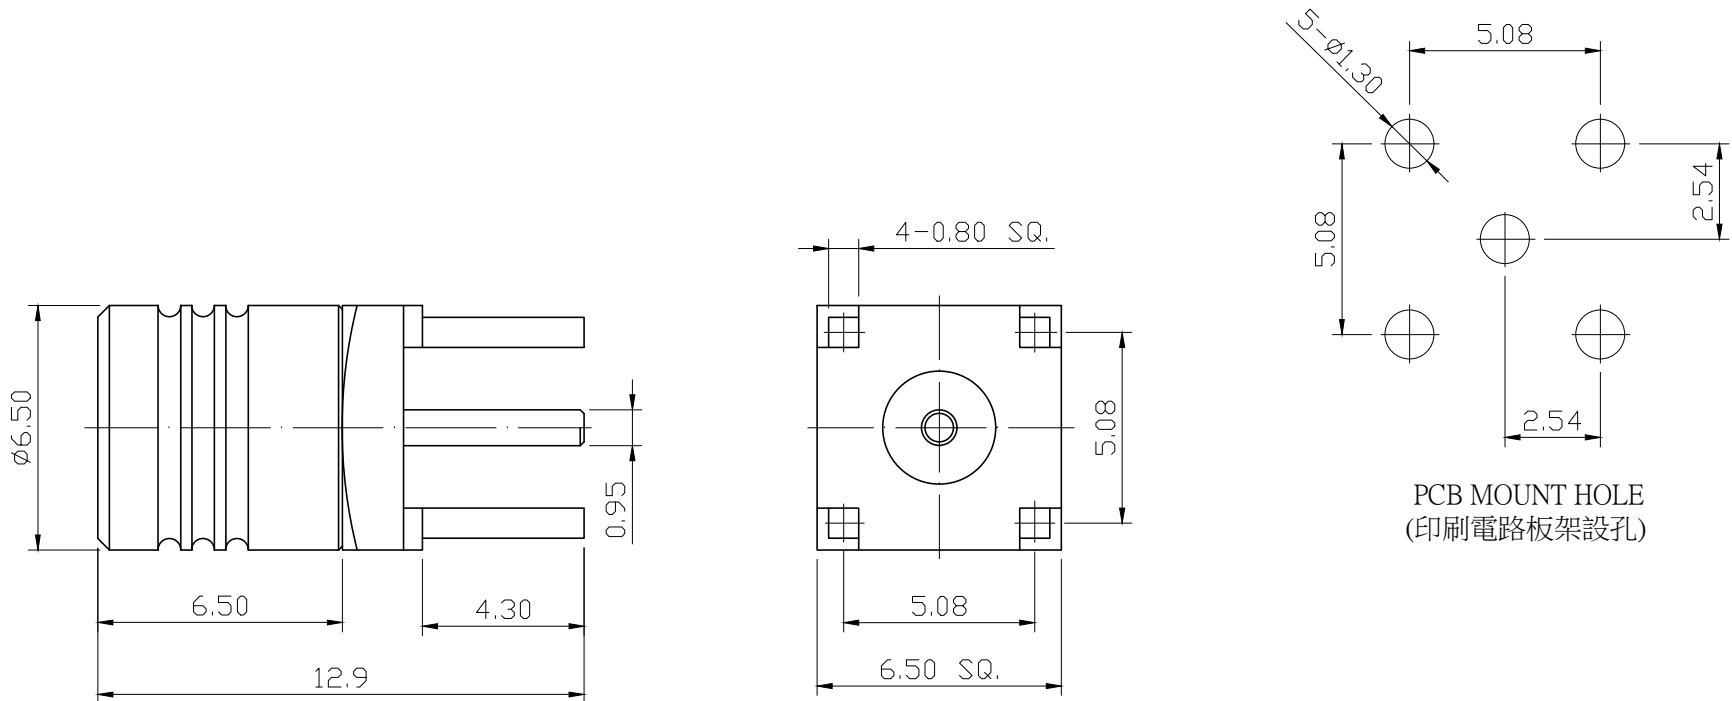

Electricals:

- 1.Impedance: 50 ohms
- 2.Frequency Range: DC~4.0 GHz
- 3.Working Voltage: 335V rms min.
- 4.Dielectric Withstanding Voltage: 5000 MΩ min.



-					DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°	CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.		
-	contact pin	1	phosphor bronze	gold (3u")		DRAWN		TITLE	
-	insulator	1	PTFE	none		<i>Chad</i>	2015. 08. 18	SMB STRAIGHT PLUG PCB MOUNT	
-	body	1	brass	gold				DRAWING NO.	
-	c-ring	1	bellyium copper	gold				SB-1006GTG-SA0015	
-	shell	1	brass	gold				FILE NO. DRAWING\RF\SB\SB-1006GTG-SA0015	
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	5 : 1	UNIT	MM