



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

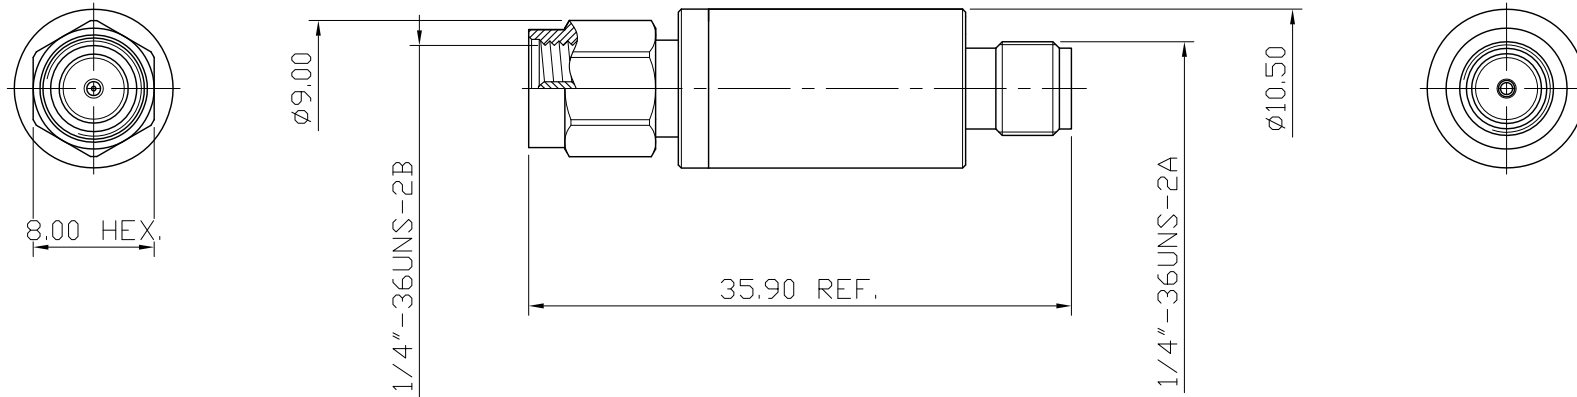

Electrical Characteristic :

	Frequency	Insertion Loss	VSWR
Pass Band	2400 ~ 2500 MHz	2 dB Max.	2.5 Max.
Stop Band, Lower	880 ~ 1910 MHz	20 dB Min.	N/A
Stop Band, Upper	4800 ~ 5800 MHz	20 dB Min.	N/A

-	contact pin female	1	beryllium copper	gold(3u")	
-	insulator female	1	PTFE	white	
-	pillar	4	brass	none	
-	chip filter	1	SMD	none	
-	pcb	1	FR4	none	
-	shell	1	brass	nickel	
-	body	1	brass	gold	
-	insulator male	1	PTFE	white	
-	contact pin male	1	brass	gold(3u")	
-	C ring	1	steel	none	
-	gasket	1	silicone	red	
-	shell	1	brass	gold	



S 1 : 1

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)
 0.5~6 = ±0.2
 >6~30 = ±0.4
 >30~120 = ±0.6
 >120~315 = ±1
 >315~1000 = ±1.6
 ANGLES(角度) = ±5°

CHECKED

DRAWN

Jordan

DATE

2019. 10. 09



雅鈦企業有限公司
Aec Connectors Co., Ltd.

TITLE SMA PLUG TO SMA JACK
2.4GHz BAND PASS FILTER

DRAWING NO.

FI-1002S-SA15TG-SA25TG

FILE NO. DRAWINGWRFIFIFI-1002S-SA15TG-SA25TG

NO.	Description	Unit	Materials	Finish	Drawing No.
-----	-------------	------	-----------	--------	-------------

SCALE	UNIT	MM
2 : 1		