


No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

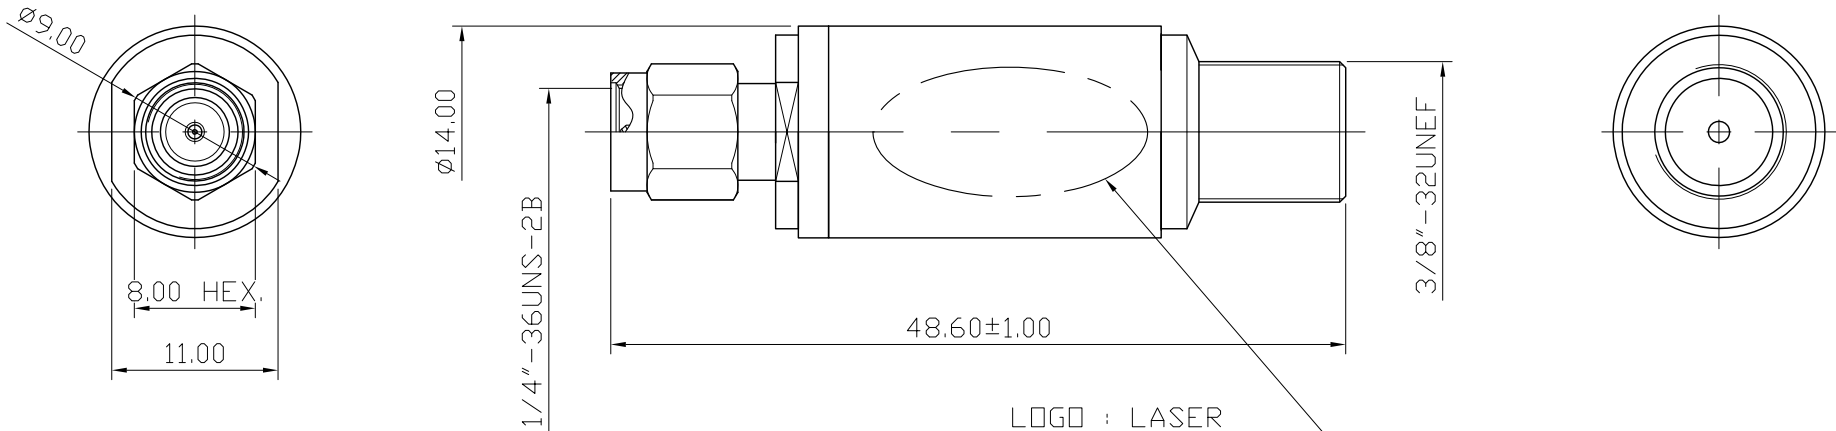

**aeco RF**


LOGO : LASER  
THE ACTUAL DIRECTION AND POSITION OF THE LOGO MIGHT BE SLIGHTLY DIFFERENT.

14	resistor	2	ceramic	tin
13	screw	2	brass	nickel
12	pcb board	1	FR4	tin
11	body-f	1	brass	nickel
10	insulator-f	1	PTFE	nature
9	contact pin-f	1	bellium copper	gold (3u")
8	shell	1	brass	nickel
7	body	1	brass	nickel
6	contact pin-sma	1	brass	gold (3u")
5	insulator-sma	1	PTFE	nature
4	body-sma	1	brass	nickel
3	c ring	1	stainless steel	passivate
2	gasket	1	silicone	red
1	shell-sma	1	stainless steel	passivate

**Electrical Characteristic :**  
**Frequency Range : DC ~ 3GHz**  
**VSWR : 1.2:1 max.**  
**Insertion Loss : 5.7±0.5dB**



S 1 : 1

NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	2 : 1	UNIT	MM	DATE	2018. 03. 21	CHECKED		 <b>雅鈦企業有限公司</b> Aec Connectors Co., Ltd.	
DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°															
											DRAWN	<i>Jordan</i>	TITLE		SMA PLUG 50 Ohm TO F JACK 75 Ohm IMPEDANCE MATCHING PAD
											DATE	2018. 03. 21	DRAWING NO.		MP-1001S-SA15TA-FS27TA
														FILE NO.	DRAWINGR\FMPMP-1001S-SA15TA-FS27TA