



REMARK : RoHS REQUIREMENT APPLIED
(符合RoHS)

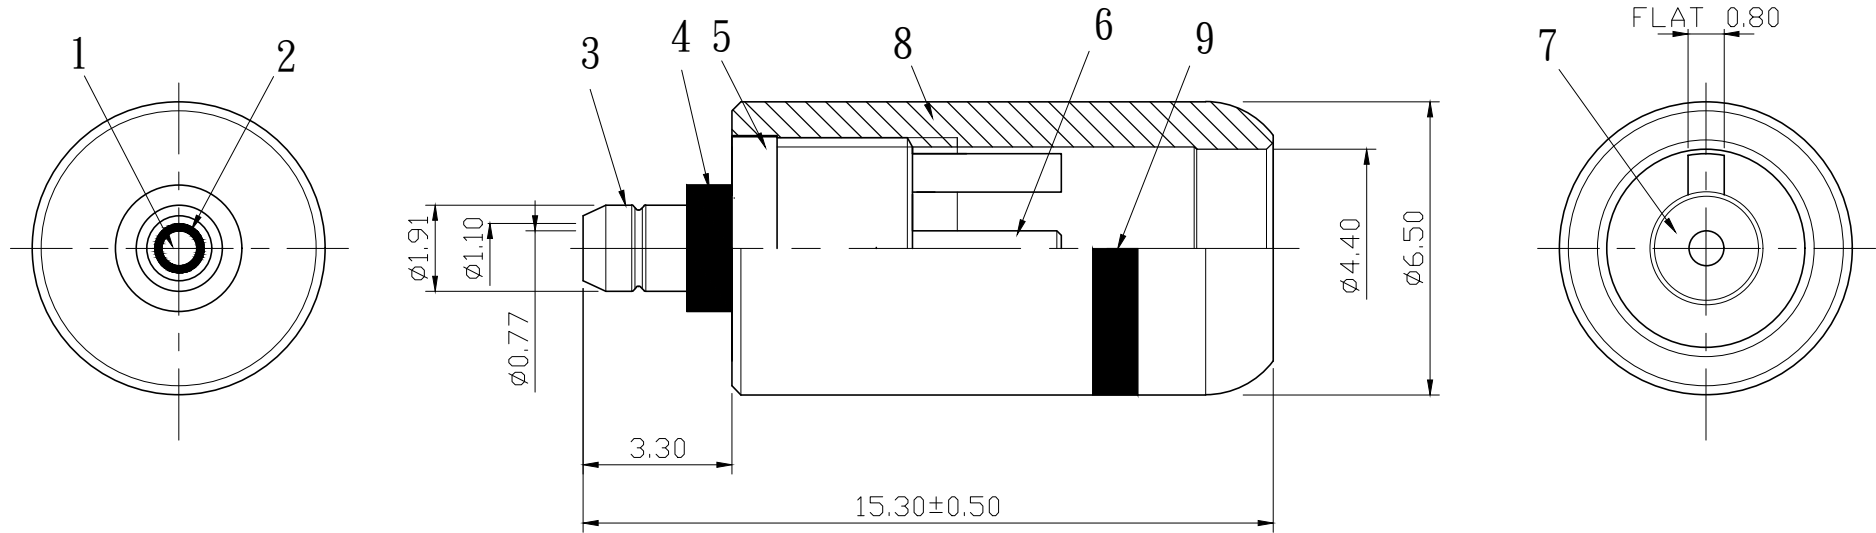


NOTE:

1. The number 1~3(body assembly) and 4 parts are provided by customer.
2. Nickel(120u") base with gold(5u") plated.



S 1 : 1

9	color ring	1	painting	black/red		DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ± 0.2 >6~30 = ± 0.4 >30~120 = ± 0.6 >120~315 = ± 1 >315~1000 = ± 1.6 ANGLES(角度) = $\pm 5^\circ$	CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.	
8	shell	1	aluminum	clear anodic treatment					DRAWN <i>Jordan</i>
7	insulator	1	POM	black			DATE 2019. 11. 20		
6	contact pin	1	brass	gold(5u")					FILE NO. DRAWING\AUDIO\IP\IP-560ATG5u-POM-BK/RD-4.4
5	body	1	brass	gold(5u")					
4	O ring	1	silcone	black/red					
3	body	1	brass	gold(5u")					
2	insulator	1	LCP	black					
1	contact pin	1	beryllium copper	gold(5u")					
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	6 : 1	UNIT	MM