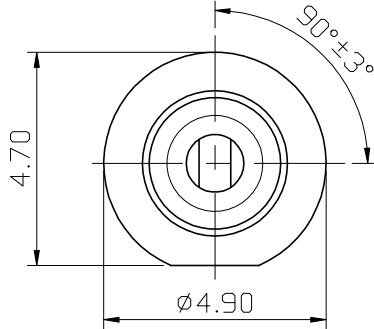

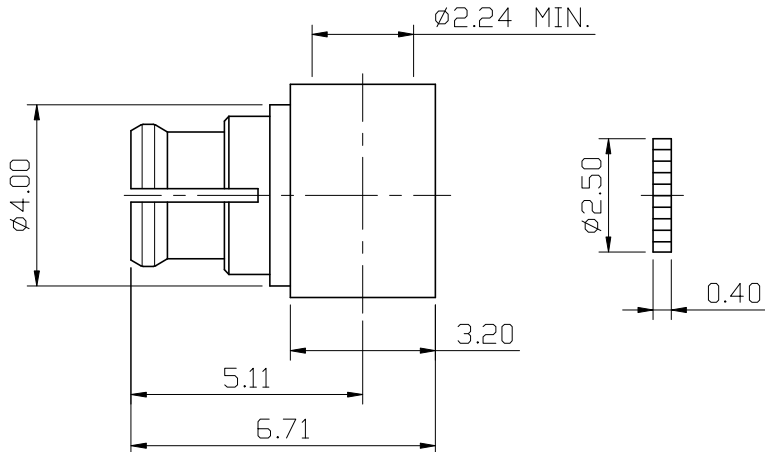



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)				DATE	DRAWING NO.
  RECOMMENDED CABLE ATRIPPING DIM'S (建議剝線尺寸)  S 1 : 1									
-						DIMENSIONS ARE IN MILLIMETERS UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°		CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd. TITLE SMP R/A DIRECT SOLDER JACK (FOR .085, .086, RG-405/U CABLE) DRAWING NO. SP-1001GTG-RF1525B FILE NO. DRAWINGRFSPSP-1001GTG-RF1525B
-									
-	cover	1	brass	gold	DRAWN Chad				
-	retainer ring	1	brass	gold					
-	contact pin	1	beryllium copper	gold	DATE 2018. 08. 17				
-	insulator	1	PTFE	white					
-	body	1	beryllium copper	gold					
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE 6 : 1	UNIT MM		