


## The HeatMax™ RF dial room thermostat c/w NSB

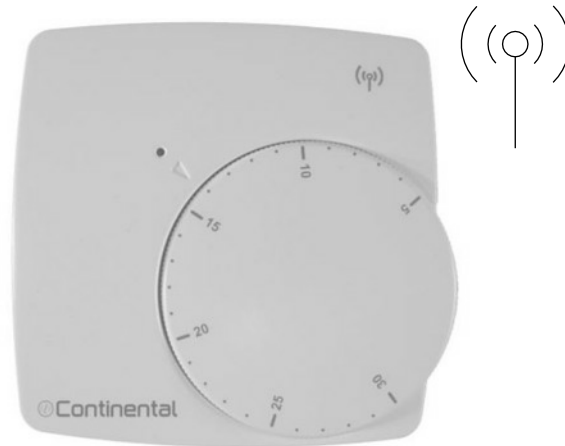

### FEATURES:

- Easy temperature selection via rotary dial
- Battery powered
- Night set back controlled from central clock
- Cost effective and reliable

### APPLICATION:

This thermostat is for use with the HeatMax™ RF single zone receiver or HeatMax™ RF UFH wiring centre.

The HeatMax™ RF single zone receiver provides individual room control with manual night set back and manual reset.

The HeatMax™ RF UFH wiring centre with HeatMax™ RF NSB timer module provides individual room control with centralised timed night set back and timed reset.

### TECHNICAL INFORMATION:

Power supply	2 x 3V (CR2430) batteries
Battery life	~ 2 years
Operating temperature	0 to 50°C
Setting temperature range	5 to 30°C
Radio frequency	433.92MHz, <10mW
Electrical Protection	IP30