


HeatMax™ pump assembly

32007

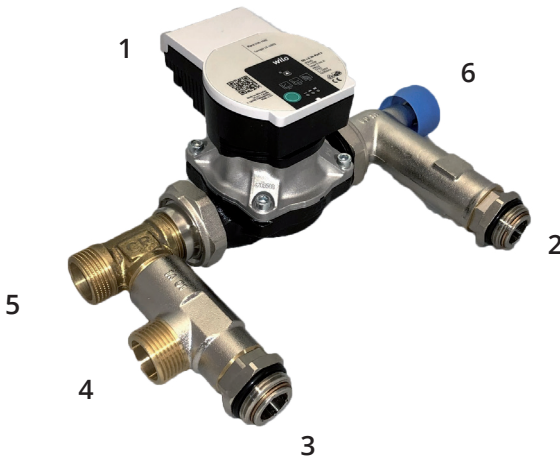

System components

1. Pump
2. Manifold flow
3. Manifold return
4. Primary return
5. Primary supply
6. Thermometer

Overview

The HeatMax™ pump assembly is a pre-assembled pump unit that is designed to be connected (via ball valves) to the manifold. The unit is for use in situations where water temperature controls are not required. This is usually the case where heat pumps are utilised. The unit includes an 'A' rated energy efficient pump, and is suitable for use with floor areas of up to 250m², or a maximum output of 20kW. Primary flow and return connections are situated at the bottom of the unit, and the unit can be mounted on either the left or right-hand side of the manifold.

Want more information?

0333 800 1750

www.ufh.co.uk