

# Product datasheet

## UltraSlim™-15

Only 15mm thin, UltraSlim™-15 is our lowest profile system yet. It is a high strength composite panel, combining a high-compressive strength MDF base, and a bonded heat dissipation layer, to maximise output and strength.

The universal UltraSlim™-15 panel incorporates return loops and distribution channels, giving you a “one panel” simple installation.



### Technical:

- Material: MDF low emission grade E1
- Dimensions: 1200mm x 600mm x 15mm
- Pipe centres: 150mm or 200mm
- Pipe channels: 12mm
- Panel weight: 12kg
- Edge profile: square edge
- Foil diffuser: 80µm
- Moisture-resistant MDF
- Thermal conductivity: 0.13W/mK

### Other properties:



- Fire protection class: D

### Features:

- Ultra-low profile system: 15mm
- Ideal for renovation or new build
- One universal panel, no need for end return panels
- Overfloor or floating floor system, suitable for any floor construction
- High-performance system, suitable for all heat sources
- Pipe centre variants to optimise design requirements
- Uses SUPERflex™-12 pipe

### UltraSlim™-15 options:

- UltraSlim™-15-100 uses 100mm centres for low temp applications
- UltraSlim™-15-150 uses 150mm centres for high temp applications

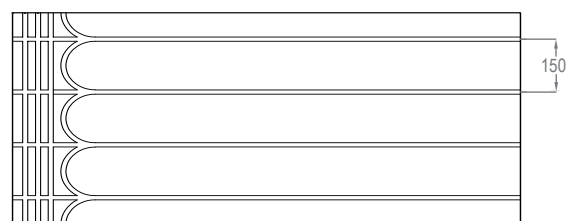

## About us

No ifs, no buts. The award-winning Continental Underfloor® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.

