


# Product datasheet

## ThermoDEK™-18

ThermoDEK™-18 is a low-profile, high-output, high-strength, solid gypsum panel incorporating pipe grooves at 150mm centres for our SUPERflex™-12 pipe.

The panel is complimented with a return panel (ThermoDEK™-18R) to allow pipe runs and pipe returns at opposite ends of the room.

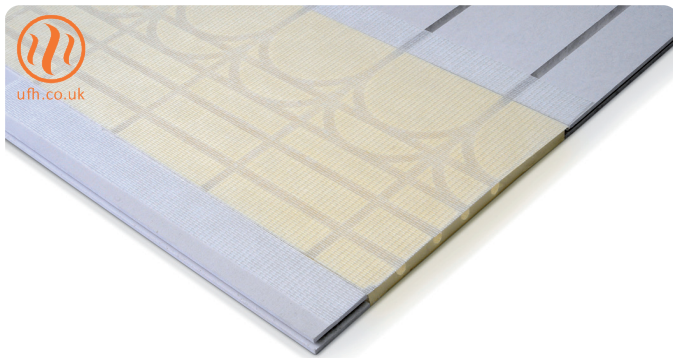


### ThermoDEK™-18 panel

#### Technical:

- Material: gypsum panel
- Dimensions: 600mm x 1200mm x 18mm
- Pipe centres: 150mm
- Pipe channels: 12mm
- Panel weight: 15.5kg
- Edge profile: tongue and groove
- Compressive strength: rigid, non compressive

#### Other properties:

- Fire protection class: A1

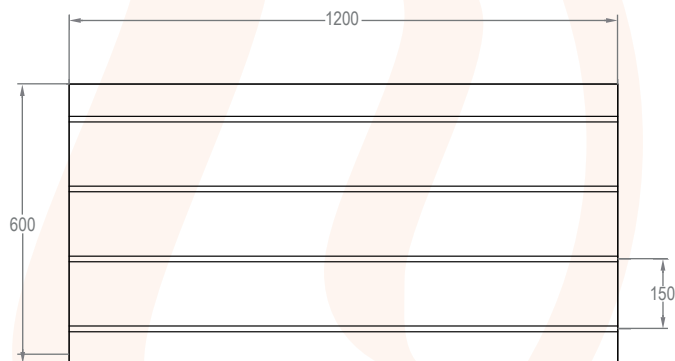


## About us

No ifs, no buts. The award-winning Continental Underfloor® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.

### Features:

- Fast to lay
- High output
- High strength
- Only 18mm thin

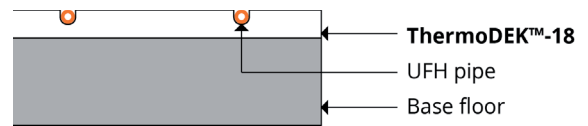

### ThermoDEK™-18R return panel

#### Technical:

- Material: XPS-500
- Dimensions: 1200mm x 300mm x 18mm
- Pipe centres: 150mm
- Pipe channels: 12mm
- Panel weight: 0.5kg
- Edge profile: square edge
- Compressive strength: 500kPa

#### Other properties:

- Fire protection class: E

