



'Browse View' clearly shows the captured content:

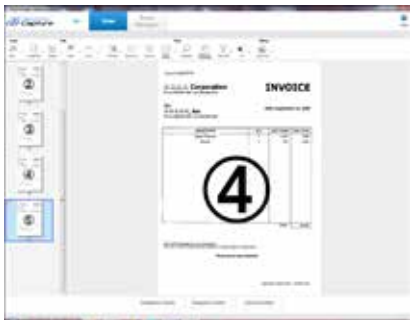

'Page View' reveals any additionally extracted information, such as invoice numbers, in an editable field:

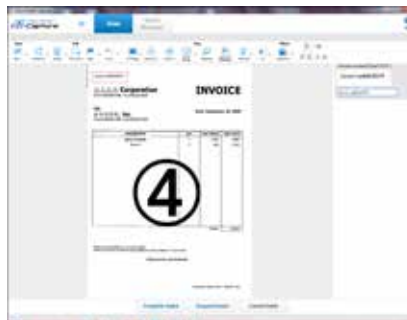

Creating and maintaining PaperStream profiles and capturing routines directly within PaperStream Capture 1.5 is intuitively easy:



Capture jobs in progress are displayed in a sorted list for higher visibility of processing status:




Specifications

Model		fi-7030
Supported operating systems		See http://emea.fujitsu.com/fiscannerfaqs/ for further information
Scanner type		Automatic Document Feeder (ADF)
Scanning modes		Simplex / Duplex, Colour / Greyscale / Mono
Image sensor type		Colour CIS (Contact Image Sensor) x 2 (front x 1, back x 1)
Light source		3 Colour LED (Red / Green / Blue) x 2 (front x 1, back x 1)
Multifeed detection		Ultrasonic multifeed detection sensor x 1, Paper detection sensor x 1
Document size	Maximum	216 x 355.6 mm
	Minimum	50.8 x 50.8 mm
	Long page scanning ¹	216 x 5,588 mm
Recommended paper weight		40 to 209 g/m ² / supports 127 to 209 g/m ² for A8 size ID card types, Embossed card 0.76 mm or less
Scanning speed (A4 Portrait) ²		Simplex: 27 ppm (200/300 dpi), Duplex: 54 ipm (200/300 dpi)
	Colour ³ / Greyscale ³ / Mono ⁴	
Paper chute capacity (A4 Portrait) ⁵		50 sheets (A4: 80 g/m ²)
Background colours		White
Optical resolution		600 dpi
Output resolution ⁶	Colour / Greyscale / Mono	50 to 600 dpi (adjustable by 1 dpi increments), 1,200 dpi (driver) ⁷
Output format		Colour: 24 bit, Greyscale: 8 bit, Mono: 1 bit
Internal video processing		1,024 levels (10-bit)
Interface / Connector shape		USB 2.0 / USB 1.1 / B type
Image processing functions		Deskew, Cropping, Image emphasis, Error diffusion, Dither, Black & White Method, Dynamic threshold (iDTC), Static threshold, Advanced DTC, SDTC, De-Screen, Dropout colour (Red / Green / Blue / White / None / Saturation / Custom), Automatic colour detection, Multi image output, Blank page detection, sRGB output, Split image, Front/Back Merging
Power requirements		AC 100 to 240 V ±10%
Power consumption		Operating mode: 17 W or less / Sleep mode: 1.1 W or less / Auto standby (off) mode: 0.15 W or less
Operating environment		Temperature: 5 to 35°C / Relative humidity: 20 to 80% (Non-condensing)
Dimensions (W x D x H) ⁸ / Weight		290 x 146 x 130 mm / 2.9 kg
Included software / drivers		PaperStream IP (TWAIN / TWAIN x64 / ISIS), PaperStream Capture, Software Operation Panel, Error Recovery Guide, ScanSnap Manager for fi Series ⁹ , Scan to Microsoft SharePoint ⁹ , ABBYY FineReader for ScanSnap ^{TM9} , Scanner Central Admin Agent
Environmental compliance		ENERGY STAR [®] and RoHS ¹⁰
Included items		ADF paper chute, AC cable, AC adapter, USB cable, Setup DVD-ROM

¹ The fi-7030 is capable of scanning documents that exceed A4 in length: Documents up to 5,588 mm in length can be scanned at resolutions up to 200 dpi.
² Actual scanning speeds are affected by data transmission and software processing times.
³ JPEG compressed figures.
⁴ TIFF G4 compressed figures.
⁵ Maximum capacity varies, depending upon paper weight.
⁶ Maximum output resolutions may vary, depending upon the size of the area being scanned and whether the scanner is scanning in simple or duplex.
⁷ Scanning limitations due to scanning mode, document size and available memory may occur when scanning at high resolutions (600 dpi or higher).
⁸ Excluding the ADF paper chute and Stacker.
⁹ The software can be downloaded from the website designated in the Setup DVD-ROM.
¹⁰ PFU LIMITED, a Fujitsu company, has determined that this product meets RoHS requirements (2011/65/EU)



All names, manufacturer names, brand and product designations are subject to special trademark rights and are manufacturer's trademarks and/or registered brands of their respective owners. All indications are non-binding. Technical data is subject to change without prior notification.



PFU (EMEA) Limited
 Hayes Park Central
 Hayes End Road, Hayes
 Middlesex UB4 8FE
 United Kingdom

Tel: +44 (0)20 8573 4444

PFU (EMEA) Limited
 Frankfurter Ring 211
 80807 Munich
 Germany

Tel: +49 (0)89 32378 0

PFU (EMEA) Limited
 Viale Monza, 259
 20126 Milano (MI)
 Italy

Tel: +39 02 26294 1

PFU (EMEA) Limited
 Camino Cerro de los Gamos, 1
 28224 Pozuelo de Alarcón
 Madrid
 Spain

Tel: +34 91 784 90 00

<http://emea.fujitsu.com/scanners>

