





THIS PLATFORM IS DESIGNED FOR
WHEELCHAIR



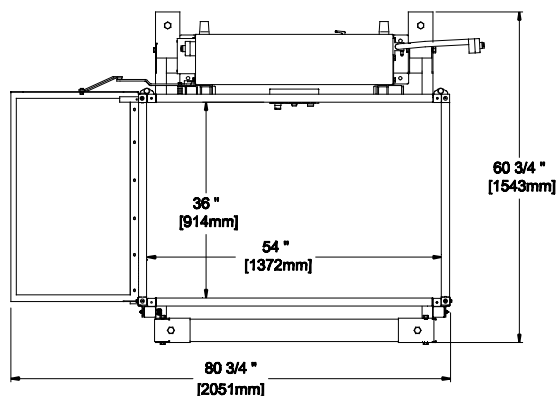


TOP VIEW

FOR REFERENCE ONLY
DO NOT USE FOR CONSTRUCTION

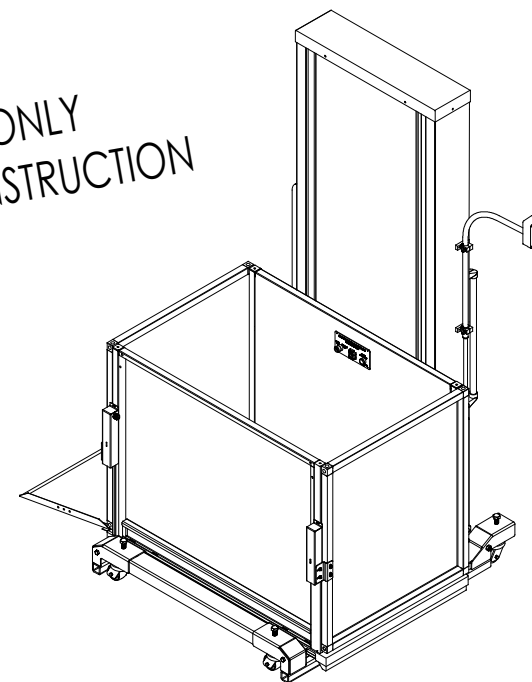

VUE ISOMÉTRIQUE

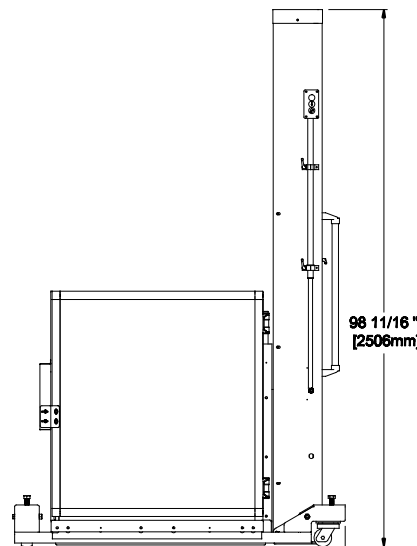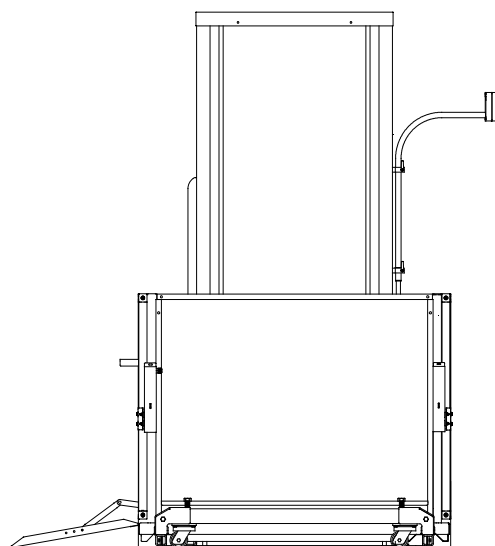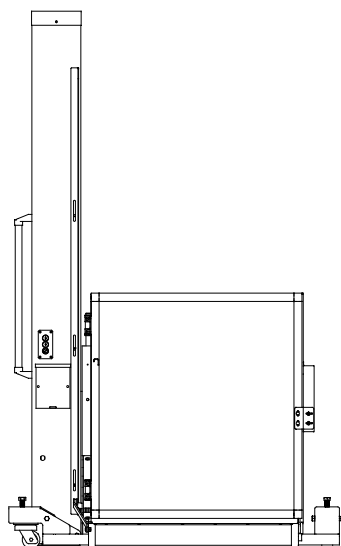

ELEVATION

SPECIFICATIONS

- Capacity: 750lbs
- Travel: 8" à 48" (variable)
- Motor: 1hp, 24 volts DC
- Battery operated
- Power requirement of the chargers: 120volts AC, 15A


*Spécifications sujet to changed
without notice

1

Vista Mobile

*However the stage lifts for disabled peoples are not included in the scope the hereby mentioned codes; the components and the design of the device comply with the state of the art found in CSA B355-09, ASME A18.1 and ASME A17.1/CSA B44.

DRAWING FOR APPROBATION			
CHOOSÉ (✓)	APPROVED		
	APPROVED AS NOTED		
	RESUBMIT AS NOTED		
SIGNATURE		DATE	
SIGN AND RETURNED TO ATLAS			

TYPICAL DRAWING			
XX	XX	XX	XX-XX-2018
REV	BY	DESCRIPTION:	DATE:
 Les Escalateurs Atlas Inc. 3175 Boul. Choquette St-Hyacinthe (Québec) J2S 7Z8, Canada Tél: (450) 796-5708 Fax: (450) 250-5110			
VISTA MOBILE_36x54		Revision:	
Status: INFORMATION		No Sheet: 1/1	

CONFIGURATION DETAILS	
Code: B-613 A18.1 A18.1 SECTION 5	B-355 2015 A18.1 2014
DOOR INTERLOCK TYPE: HONEYWELL	
Guard panel: 81" HEIGHT	
Safety:	± 1/16"
Draftsman: M. Debusschere	
Date:	10/12/2018