




## QUAD CONFIGURATION FOR WELL WATER, CATCHMENT, OR CISTERN PARALLEL SYSTEMS IN SERIES RATED TO 90GPM: Two Views

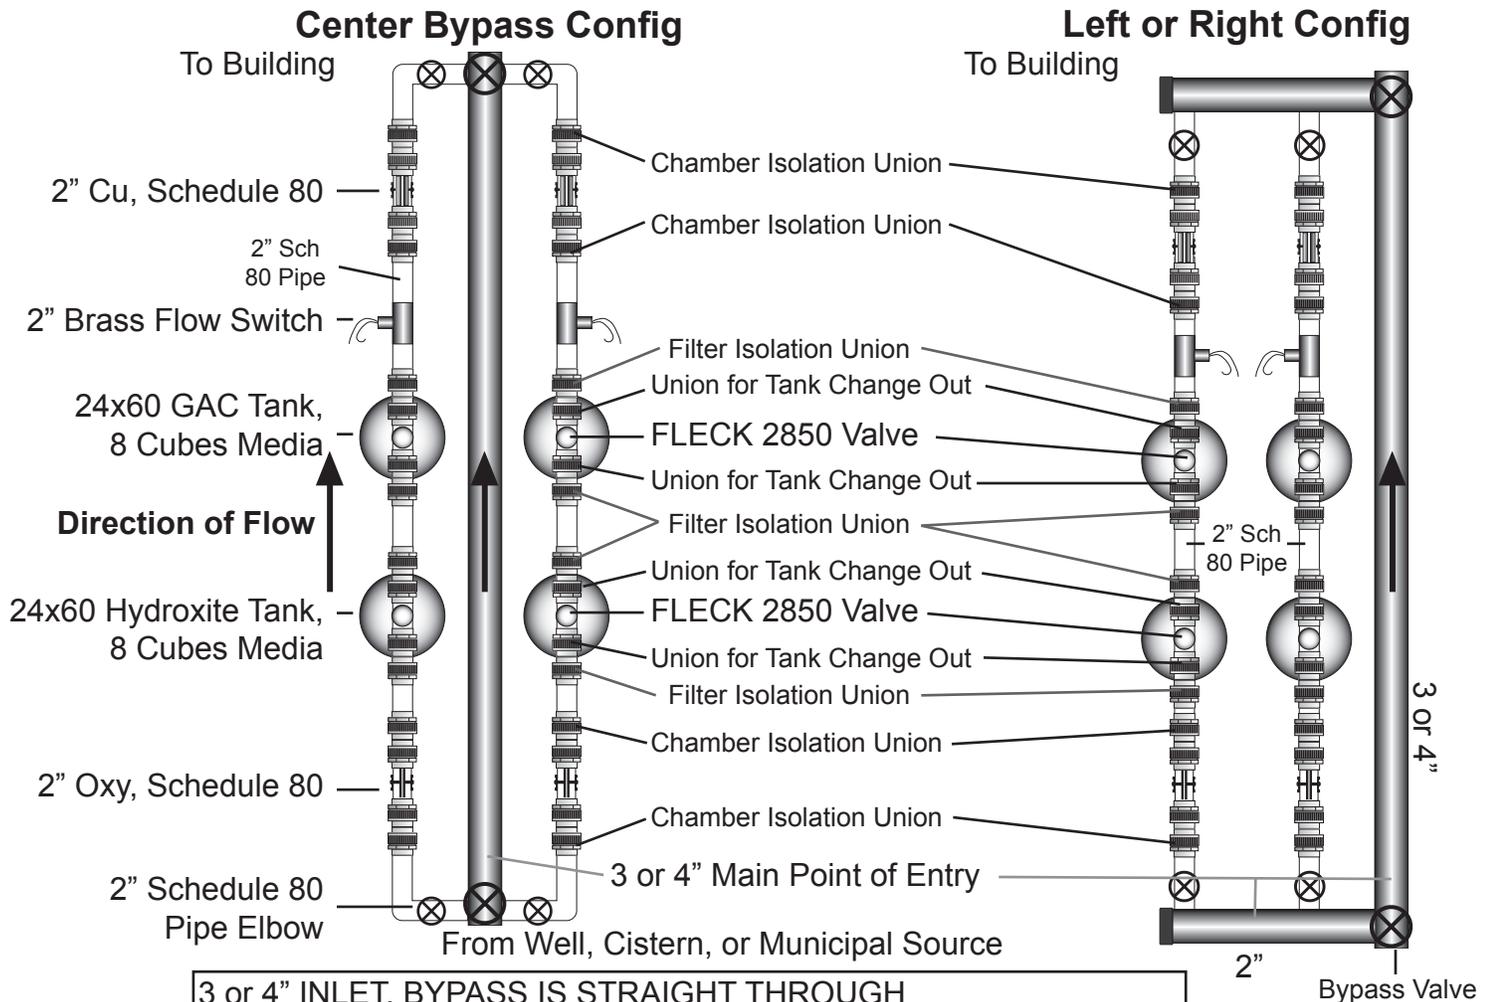

3 or 4" INLET, BYPASS IS STRAIGHT THROUGH  
 Two 2" LINES IN PARALLEL  
 Two 24x60 GAC AND HYDROXITE TANKS, 1 SET IN EACH SERIES  
 Two FLECK 2850 VALVES  
 GATE VALVES ISOLATE Cu/Oxy CHAMBERS  
 TWO YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT  
 TWO YEAR COPPER CHANGE OUT  
 MONTHLY Cu/Oxy CHAMBER CLEAN  
 DAILY COPPER TEST .1ppm TO .25ppm  
 VALVE TIMERS CONFIRMED  
 ALL TANKS BACKWASH AT DIFFERENT TIMES  
 GAC FLOW CONTROL 35 DFLC  
 HYDROXITE FLOW CONTROL 60 DFLC  
 110v / 60Hz ECOsmarte CONTROLLERS  
 FLECK 2850 VALVES, REBUILD KIT 2nd YEAR

**LOGISTICS:**

SHIPS 5 PALLETS; 1250lbs ON EACH PALLET

ECOsmarte Planet Friendly, Inc. • 1600 E. 78th Street • Richfield, MN 55423 • Phone: (612) 866-1200 • Fax: (612) 866-0152