




## QUAD CONFIGURATION FOR WELL WATER, OR IRRIGATION PARALLEL SYSTEMS IN SERIES RATED TO 60GPM: Two Views

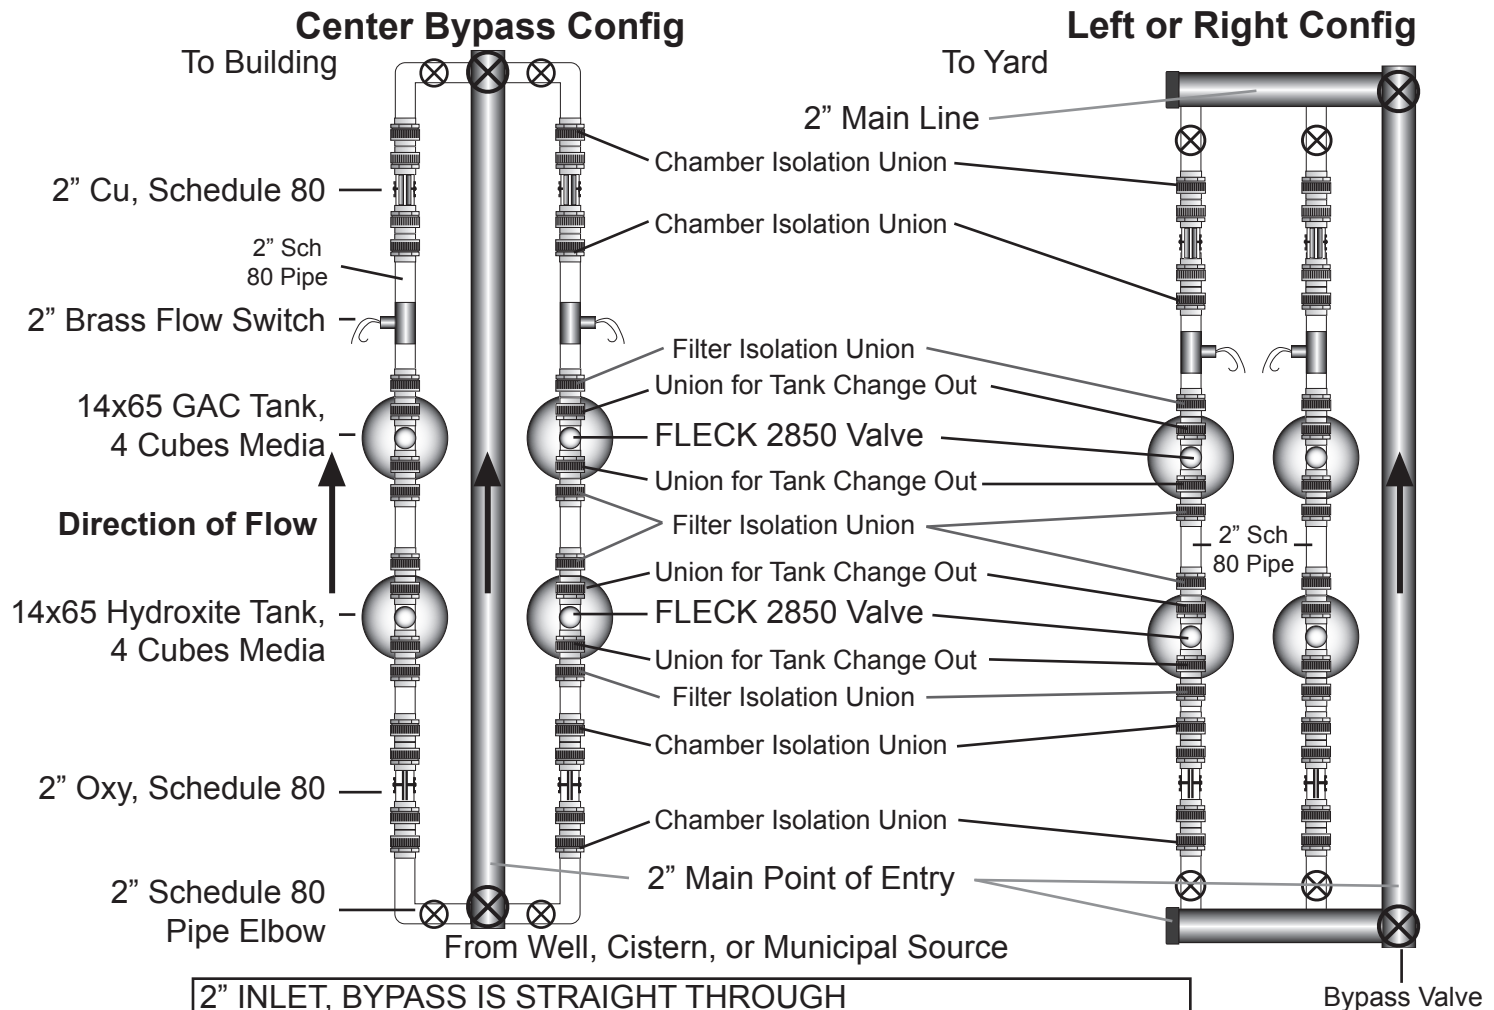

2" INLET, BYPASS IS STRAIGHT THROUGH  
Two 2" LINES IN PARALLEL  
Two 12x52 GAC AND HYDROXITE TANKS, 1 SET IN EACH SERIES  
Two FLECK 2850 VALVES  
GATE VALVES ISOLATE Cu/Oxy CHAMBERS  
THREE YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT  
THREE YEAR COPPER CHANGE OUT  
MONTHLY Cu/Oxy CHAMBER CLEAN  
VALVE TIMERS CONFIRMED  
ALL TANKS BACKWASH AT DIFFERENT TIMES  
GAC FLOW CONTROL 7 DFCL  
HYDROXITE FLOW CONTROL 12 DFCL  
110v / 60Hz ECOsmarte CONTROLLERS  
FLECK 2850 VALVES, REBUILD KIT 3RD YEAR

FLOW restricted  
at 21GPM to  
keep sprinkler  
heads in ground.

### LOGISTICS:

SHIPS 2 PALLETS - 600lbs ON EACH PALLET