

Aluminium Slats

Crowned aluminium slats are made from a highly elastic alloy, making them flexible, scratch-proof and shock-proof.

The double omega punching, (standard on external and double skin facade installations) combined with ladder braids, ensure smooth closing of the slats. They also retain slat alignment and stability in most weather conditions and minimise excessive movement. No additional plastic components are necessary to stabilise the slats.

Pre-treatment

AA 5050 marine grade with chromate conversion undercoat

Standard finish

High UV resistant (RUV3) PE (polyester) coil coating


Optional finish

Perforated finish and other custom finishes available on request

Colours


8 standard colours. Custom colours available on request

Standard slat colours

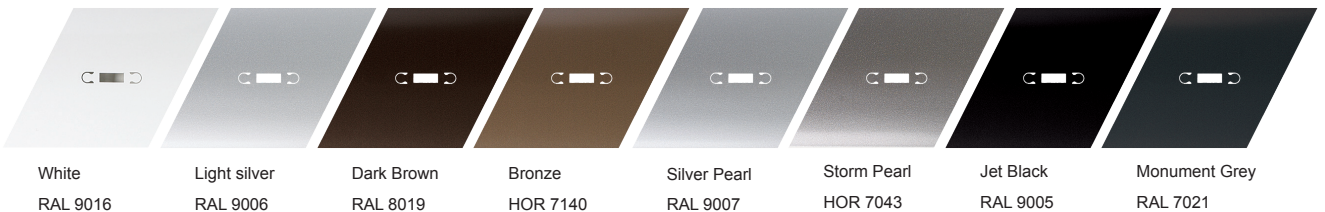


Standard slat widths

80 mm (3")



100 mm (4"mm)



150 mm (6")



horiso[®]

E: info@horiso.com.au | T: +612 8755 4500

horiso.com.au