




# 1 SERIES

<http://tiny.cc/multione1-1EN>


				
TIPPING LOAD	ENGINE POWER	SPEED	FLOW RATE	LIFT HEIGHT
<b>320</b> kg	<b>12</b> hp	<b>8</b> km/h	<b>19</b> l/min	<b>1,8</b> m


Model	1.1
Engine	Yanmar L100
Power (Iso Gross)	12 HP
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.)	8 km/h (5 mph)
Aux. hydraulics oil flow	19 l/min (5 GPM)
Max. lifting height	1,8 m (70.9 in)
Tipping load, max <sup>(1)</sup>	320 kg (705 lbs)
Lifting capacity <sup>(2)</sup>	250 kg (551 lbs)
Breakout force / 50 cm (19.7 in)	250 kg (551 lbs)
Pushing force (c)	500 kgf (500 kp)
Specific ground pressure (w/standard tires)	390 kg/m <sup>2</sup> (80 lbs/sqft)
Turning radius: inside/outside	0/993 mm (0/39 in)
Standard tires (Tractor profile)	18x9.50-8
Weight	390 kg (860 lbs)
Product Code	C926006

<sup>(1)</sup> Maximum load that can be lifted just off the ground when the machine is straight. Weight of attachment included.

<sup>(2)</sup> Weight of attachment is included (80% of tipping load).

# 1 SERIES - FEATURES

- New YANMAR L100 engine compliant with Stage V and Tier 4 Final emissions standards
- 3WD hydrostatic transmission with differential lock
- 3 line hydraulic outlets
- Boom with self-levelling
- 4-functions joystick
- Ergonomic seat with adjustable position
- Mechanical parking brake

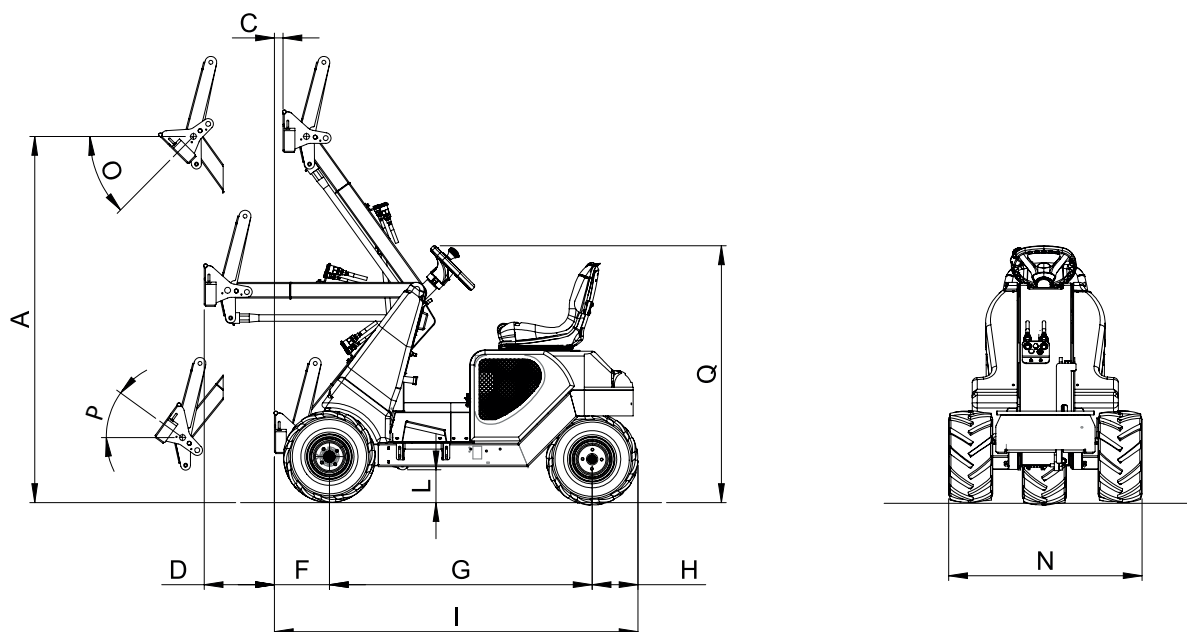

## DIMENSIONS (mm / in)

<b>A</b> - Pivot point height	1877 / 73.9	<b>I</b> - Machine length	1864 / 73.4
<b>C</b> - Outreach with lifted boom	44 / 1.7	<b>L</b> - Ground clearance	168 / 6.6
<b>D</b> - Outreach with horizontal boom	360 / 14.2	<b>N</b> - Max width (with standard tires)	992 / 39
<b>F</b> - Front length	282 / 11.1	<b>O</b> - Dump angle	45,5°
<b>G</b> - Wheelbase	1347 / 53	<b>P</b> - Rollback angle	35,5°
<b>H</b> - Rear length	235 / 9.2	<b>Q</b> - Height (with standard tires)	1316 / 51.8

Options	CODE
Biodegradable oil	C883059
Turf tires 18x9.50-8, set of 3	C885023