
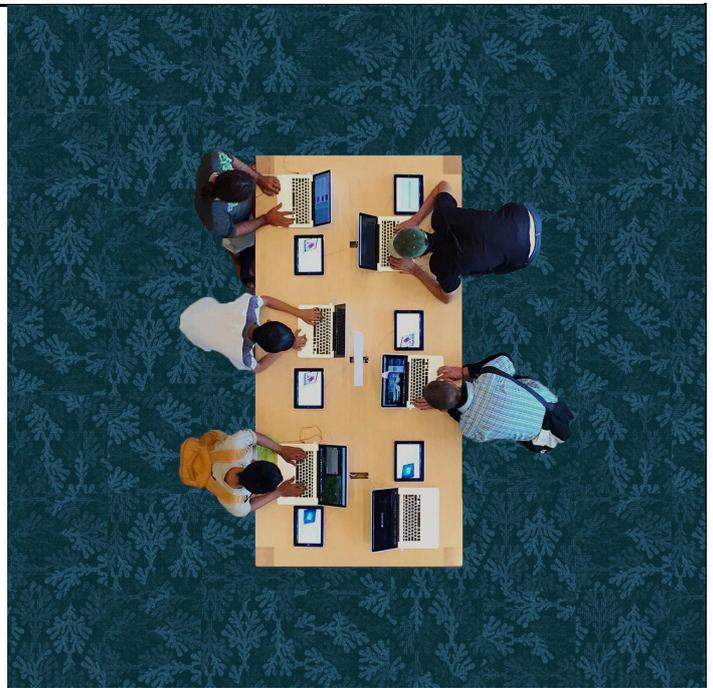


# dilana modular

## Technical Specifications

|                     |                                |
|---------------------|--------------------------------|
| Style Name          | <b>Sola by David Trubridge</b> |
| Construction        | Multi-Level Loop               |
| Fiber               | 100% SDN 6                     |
| Gauge               | 1/12"                          |
| Stitches            | 12 per inch                    |
| Pile Weight         | 19 OZ/yd <sup>2</sup>          |
| Average Pile Height | 4 mm±0.5 mm                    |
| Backing             | Mix-bac                        |
| Tile Size           | 50cm*50cm                      |
| Anti-microbial      | Ultra-Fresh (Available)        |
| Installation Method |                                |

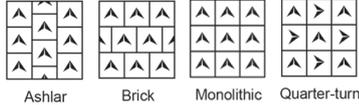

## Performance Specifications

|                           | Test Code  | Standard                   | Test Results  |
|---------------------------|--|----------------------------|---------------|
| <b>Flammability Tests</b> |  |                            |               |
| Radiant Panel             | ASTM E 648   | ≥ 45 watt/cm               | Class I       |
| Methenamine Pill          | ASTM D2859   | 7 out of 8                 | 8             |
| Smoke Density             | ASTM E 662   | ≤ 450 DMC                  | ≤ 450         |
| <b>Stability</b>          |  |                            |               |
| Delamination              | ASTM D3936   | ≥ 3.0 lbc/in               | No Separation |
| Dimensional Stability     | AACHEN   | ≤ 0.2%                     | ≤ 0.2%        |
| Tuft Bind                 | ASTM D1335   | ≥ 8.0 lbs                  | ≥ 8.0 lbs     |
| <b>Anti-Static</b>        |  |                            |               |
| Static Propensity         | AATCC 134  | ≤ 3.5 kV                   | ≤ 3.5 kV      |
| <b>Colour Fastness</b>    |  |                            |               |
| Light                     | AATCC 16 E   | ≥ 4-5                      | 4-5           |
| Rubbing/Crocking          | AATCC 165  | ≥ 4-5                      | 4-5           |
| <b>Wear Tests</b>         |  |                            |               |
| Castor Chair              | BS EN 985  | r ≥ 2.4                    | r = 2.8       |
| Hexapod Drum              | ASTM D5252   | ≥ 3-4                      | 3             |
| <b>Generic Tests</b>      |  |                            |               |
| Green Carpet(VOC)         | CRI Green Label GLP 6331 <sup>#</sup> /6332 <sup>#</sup> |                            | Accredited    |
| Acoustic-Nylon            | BS EN ISO 354  | Absorption Coefficient-NRC | aw =0.15(H)   |



# Declare.

