


Cleaning System

 SKAGINN 3X

- Centralized unit for industrial use
- High and low pressure cleaning system
- Easy to use and service
- Cleaning system for operations on land and sea
- Controllable pressure
- Minimum need of cleaning material
- Cleaning material and pump unit is not stored in processing area



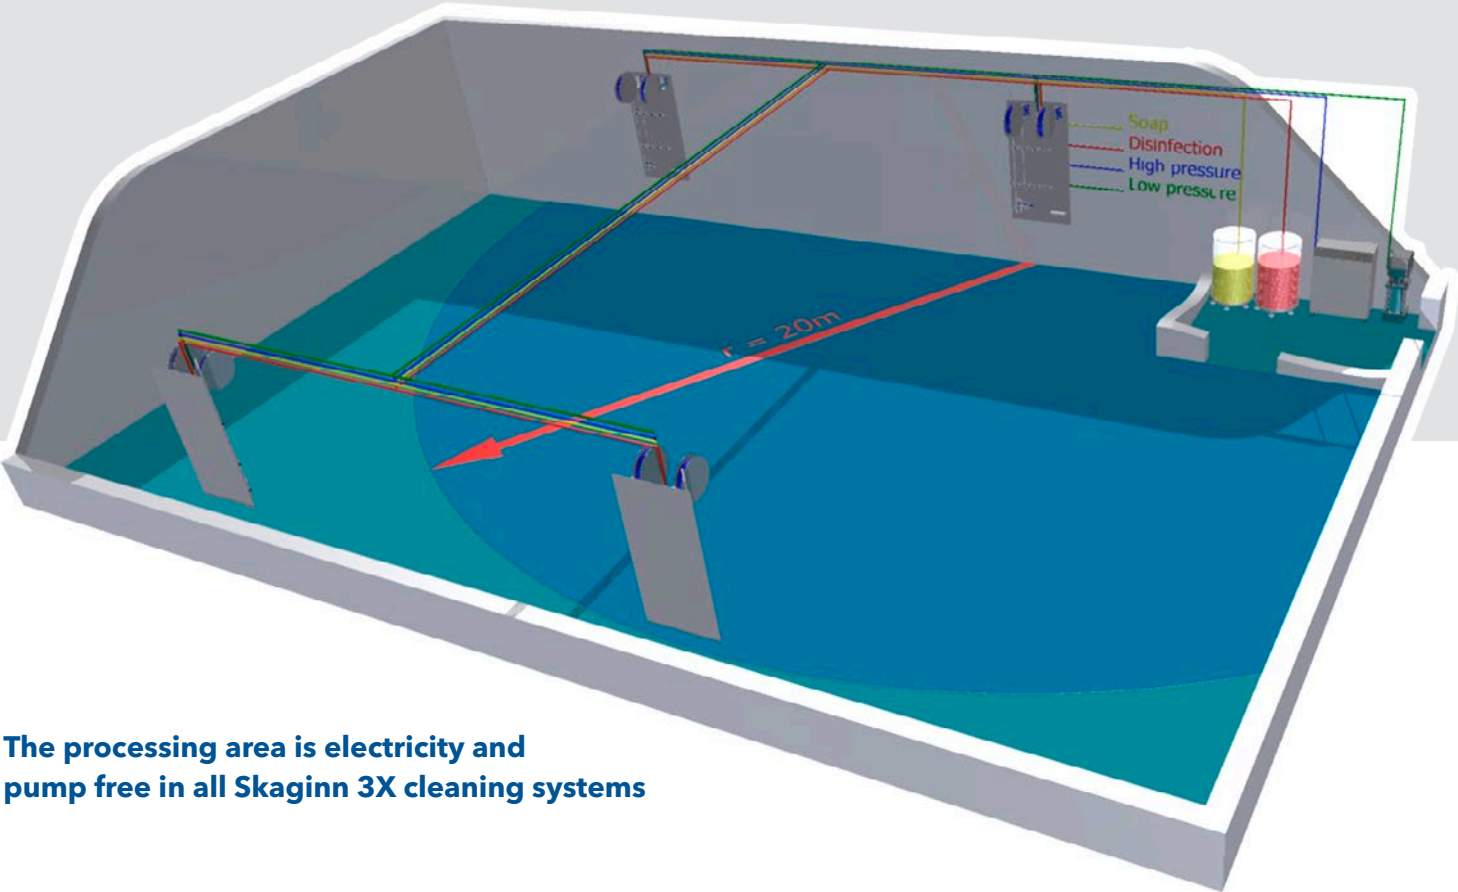

The processing area is electricity and pump free in all Skaginn 3X cleaning systems



Skaginn 3X Satellite system

A unique, service-free, wall mounted distribution terminal controls the complex soap and disinfection supply in the processing area. The high pressure pump powers the distribution of soap and disinfection through the Skaginn 3X satellite system.

High pressure cleaning station

- HP hose - 25 m
- HP spraying gun
- HP hose wheel
- Satellite system
- Foam lance
- 3 different spray lances

LOW pressure cleaning station

- LP hose - 20 m
- LP spraying gun
- LP hose wheel

High and low pressure cleaning station

- HP & LP hose - 25 & 20 m
- HP & LP spraying gun
- HP & LP hose wheel
- Satellite system
- Foam lance
- 3 different spray lances

Skaginn 3x high pressure pump unit gives superior cleaning with optimal efficiency



Type of pumps	HP1	HP2	HP3	HP5	HP7
Numbers of operators	1 person	2 persons	3 persons	5 persons	7 persons
Capacity	15 L/min	30 L/min	50 L/min	75 L/min	100 L/min
Power consumption	4 kW	8 kW	12 kW	20 kW	28 kW
Pressure	70-160 bar	70-160 bar	70-160 bar	70-160 bar	70-160 bar
Dimension L = 950 - W = 500	H = 400 mm	H = 1.300 mm	H = 1.300 mm	H = 1.300 mm	H = 1.600 mm

Skaginn 3x low pressure is used to flush off equipment and is perfect for walls and floors



Type of pumps	LP3	LP5	LP7
Numbers of operators	3 persons	5 persons	7 persons
Capacity	180 L/min	300 L/min	420 L/min
Power consumption	9 kW	15 kW	21 kW
Pressure	12-15 bar	12-15 bar	12-15 bar
Dimension L = 400 - W = 400	H = 1.000 mm	H = 1.200 mm	H = 1.400 mm

Robust and reliable washing system

