



eran industrial.

BOLLARD LAINE PLUS

MODEL: SSB600-12W-40K




Product Features

- **Rotatable Head Design**
Enables the contractor to aim the light exactly where desired.
- **Numerous Optical Distributions**
360, 270, 180, and 90 degree lighting distribution available.
- **High Quality Aluminium**
Rugged, aluminum bollard column and diecasted-base for maximum durability, corrosion-resistance, and minimal weight.

PRODUCT SUMMARY

SYSTEM WATTAGE	12W
LED WATTAGE	10W
LUMENS	1437
EFFICACY	109 lm/w
REPLACE	50W
LED CHIP	LG 5630
CCT	4000K
CRI STANDARD	≥80
DRIVER	DS driver technology
DIMENSIONS	42.48" X 6"
WEIGHT	15.21 lbs
STANDARD LIFETIME	Design minimum 50,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65
INPUT VOLTAGE	120-277V

PHOTOMETRY

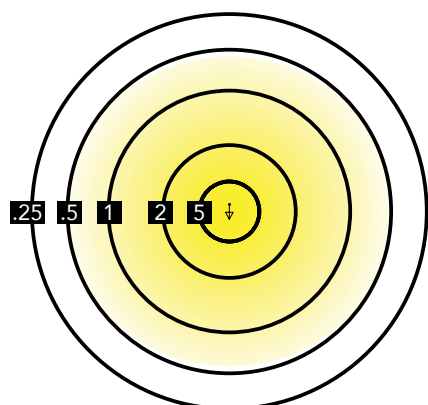

PRODUCT DIMENSIONS

