



eran industrial.

BOLLARD LAINE PLUS

MODEL: RBL400-35W-40K




PRODUCT FEATURES

- **Rotatable Head Design**
Enables the contractor to aim the light exactly where desired.
- **Numerous Optical Distributions**
360, 270, 180, and 90 degree lighting distribution available.
- **High Quality Aluminium**
Rugged, aluminum bollard column and diecasted-base for maximum durability, corrosion-resistance, and minimal weight.

PRODUCT SUMMARY

SYSTEM WATTAGE	35W
LED WATTAGE	30W
LUMENS	4276
EFFICACY	121 lm/w
REPLACE	150W
LED CHIP	LG 5630
CCT	4000K
CRI STANDARD	≥80
DRIVER	DS driver technology
DIMENSIONS	32" X 9.68"
WEIGHT	13.42 lbs
STANDARD LIFETIME	Design minimum 50,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65
INPUT VOLTAGE	120-277V

PHOTOMETRY

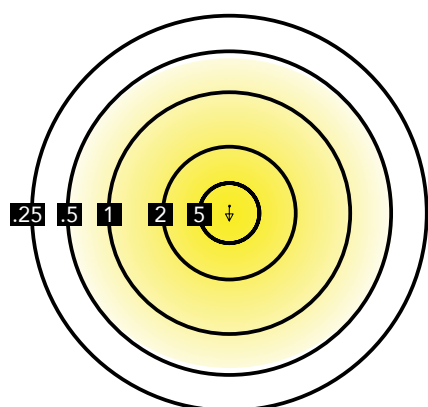

PRODUCT DIMENSIONS

