



Blister



NON - AUTOMATIC BILGE PUMPS 03 SERIES 350/600/800 GPH

FEATURES & BENEFITS

- Pump and switch are stand alone products
- Compact, efficient, long life motors
- Size: 350, 600, 800 gph in 12 volt version
- Easy clean snap-lock strainer bases
- Completely submersible
- Marine grade blocked wiring
- Quiet and vibrationless operation
- 18 AWG, 1 m long leads

MOTOR

Type

Compact, efficient, long life motor

Temperature Limits




110 °F (43 °C) Max.

Duty Cycle

Intermittent

Voltage

12 V / 24 V

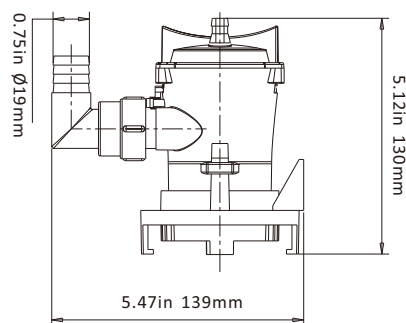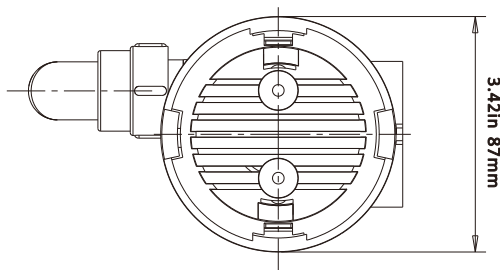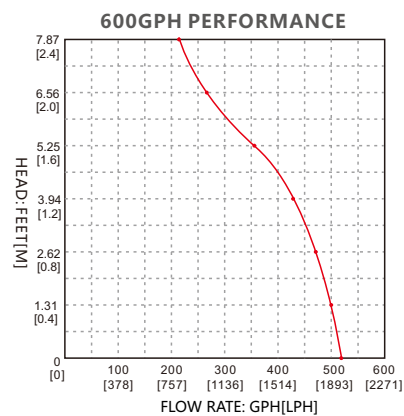

STANDARD PUMP CONFIGURATIONS

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-03	350 GPH	12 V	1.0 A	3.0 m / 10'	1 m / 3'	19 mm/3/4"	0.37/0.46 kg
SFBP1-G600-03	600 GPH	12 V	3.0 A	3.5 m / 11.5'	1 m / 3'	19 mm/3/4"	0.37/0.46 kg
SFBP1-G800-03	800 GPH	12 V	4.0 A	4.0 m / 13'	1 m / 3'	19 mm/3/4"	0.37/0.46 kg