



# HTS<sup>HP</sup>

## Hydro Testing System, High Pressure


- Easy to use touch screen interface
- State of the art system w/digital instrumentation
- Real-time test measurement displays
- Digital pump speed controls
- Configurable safety cut-off limits for test parameters
- Digital data recording and reporting via USB
- Test ready flow configuration
- Flexible calibration options for onboard instruments
- Plug-n-play instrumentation. No programming required
- User adjustable test pressure relief valve
- Lockable caster wheels



### Reduce set-up time | Ease of Use | Accurate Results

The HTS-HP is an easy to use & portable hydro & water leak rate test system.

Designed around the user to ensure reduced set-up times.

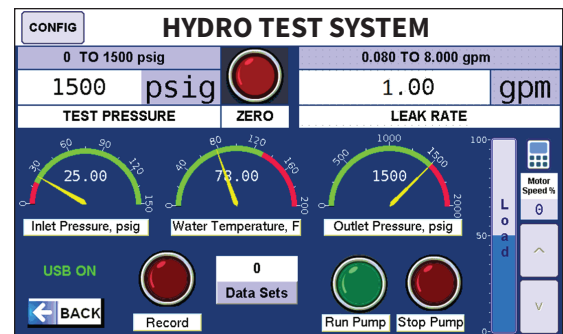

## Typical Specifications

Power	480 VAC 3P Max. 21A	
Pressure	Max Test Pressure: 1500psig	Accuracy ±0.5% of Full Scale
Flow	Range: 0.08 to 8 gpm	Accuracy: ±0.25% of Full Scale
Weight	400 lb	