




DuraSAFE Series

Multiple Fall Heights – soFRAMP



LEGEND:

- ① DuraSAFE® tile (See Specifications for Depth and Color).
- ② Tile to Base Adhesive
- ③ soFRAMP
- ④ Concrete
- ⑤ Compacted Subgrade.

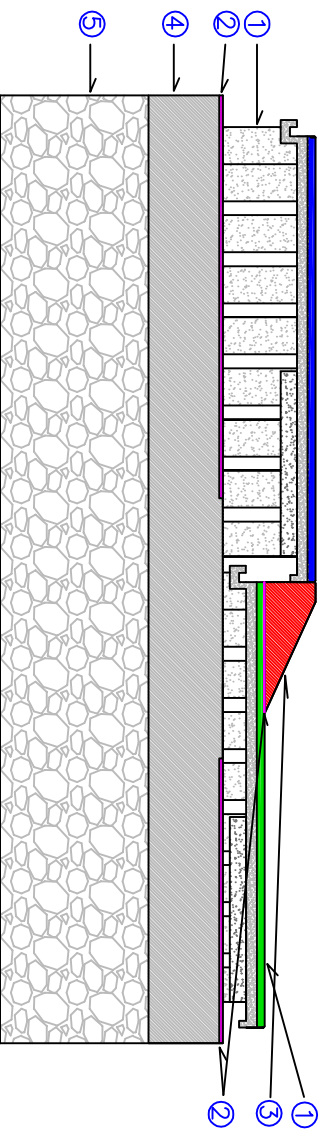

NOTES:

1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
2. Consult with a local Civil Engineer to find out proper depth of concrete curb.
3. Ensure subsoil drains towards drainage system.
4. Review Most Recent Installation Manual and Sub Surface Guide

DuraSAFE Thickness	Critical Fall Height (FT)	FILE NAME	Multiple Fall Height – soFRAMPS	PREPARED BY	B. GOSS
2.00"	3'	REV	DESCRIPTION	DATE	
2.25"	4'	0	ORIGINAL ISSUE	08/16/2016	
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'	SIZE	SCALE	DWG. NO.	REV
5.00"	10'	A	N/A	2017-028	1
5.25"	12'				



4393 DISCOVERY LINE
 PETROLIA, ONTARIO
 NON IFO (800) 263-2363
 PHONE: (519) 882-8799
 FAX: (519) 882-2697
 EMAIL: info@softsurfaces.com