




DuraSAFE Series

Multiple Fall Heights – ADA ramp

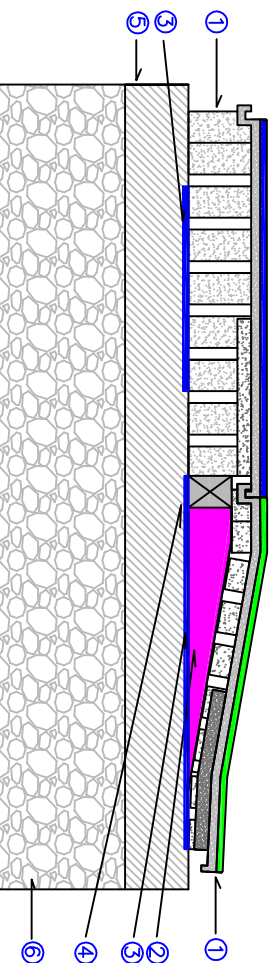

LEGEND:

- ① DuraSAFE[®] tile (See Specifications for Depth and Color).
- ② Grade B ADA Structurally Sound.
- ③ Tile to Base Adhesive
- ④ Filler so Thinner Tile Stays Level for a Minimum 4".
- ⑤ Concrete. Sloped to a 1%-2% Slope.
- ⑥ Compacted Subgrade.

NOTES:

- 1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
- 2. Consult with a local Civil Engineer to find out proper depth of concrete curb.
- 3. Ensure subsoil drains towards drainage system.
- 4. Review Most Recent Installation Manual and Sub Surface Guide

DuraSAFE Thickness	Critical Fall Height (FT)	FILE NAME	Multiple Fall Heights	PREPARED BY	B. GOSS
2.00"	3'	REV	DESCRIPTION	DATE	
2.25"	4'	0	ORIGINAL ISSUE	08/16/2016	
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'				
5.00"	10'	SIZE	SCALE	DWG NO.	REV
5.25"	12'	A	N/A	2017-028	1



4393 DISCOVERY LINE
 PETROLIA, ONTARIO
 NON TRO
 PHONE: (800) 263-2363
 PHONE: (519) 882-8799
 FAX: (519) 882-2697
 EMAIL: info@softsurfaces.com