




Buried Curb Retainer

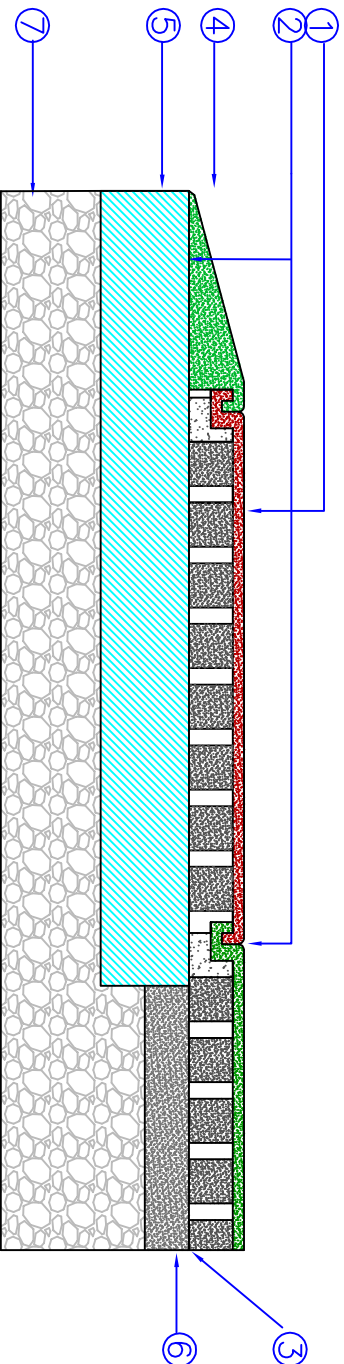

LEGEND:

- ① DuraSAFE® tile (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of Adhesive at Each KrosLOCK Joint, full width under ramp and 24" of perimeter tile to base.
- ③ 1.0% Slope – 1/8" / 12" (3mm / 300mm).
- ④ SoFRAMP Jr. Adhered down to Containing Curb as well as to the Adjacent DuraSAFE tile.
- ⑤ Concrete Under Ramp and 24" Minimum Under Tiles– ramp dimension determines width (see SoFRAMP Detail)
- ⑥ Asphalt SubSurface
- ⑦ Compacted Granular A (Type I) Base To 95% S.P.D. (See Specifications for Depth).

NOTES:

1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
2. Review Most Recent Installation Manual and Sub Surface Guide
3. Using a Concrete Saw Cut out a 3" Ribbon of Asphalt Around the Outside Perimeter. Compact the Aggregate Base Below then Pour the Concrete Base in the Voided Area. Let the Concrete Cure for 10 days Prior to Adhering the soFRAMPS/ADA's or duraSAFE tiles.

DuraSAFE Thickness	Critical Fall Height (FT)	FILE NAME	DESCRIPTION	PREPARED BY	DATE	REV
2.00"	3'	Buried Curb Retainer		B. GOSS		
2.25"	4'	REV				
2.75"	5'	0	ORIGINAL ISSUE		7/14/16	
3.25"	6'					
3.75"	7'					
4.25"	8'					
4.75"	9'					
5.00"	10'	SIZE	SCALE	DWG. NO.		REV
5.25"	12'	A	N/A	2017-027		1



4393 DISCOVERY LINE
 PETROLIA, ONTARIO
 NON. TRD.
 PHONE: (800) 263-2363
 PHONE: (519) 882-8799
 FAX: (519) 882-2697
 EMAIL: info@softsurfaces.com