




DuraSAFE Series

Contained by Curb over
Aggregate with Drainage

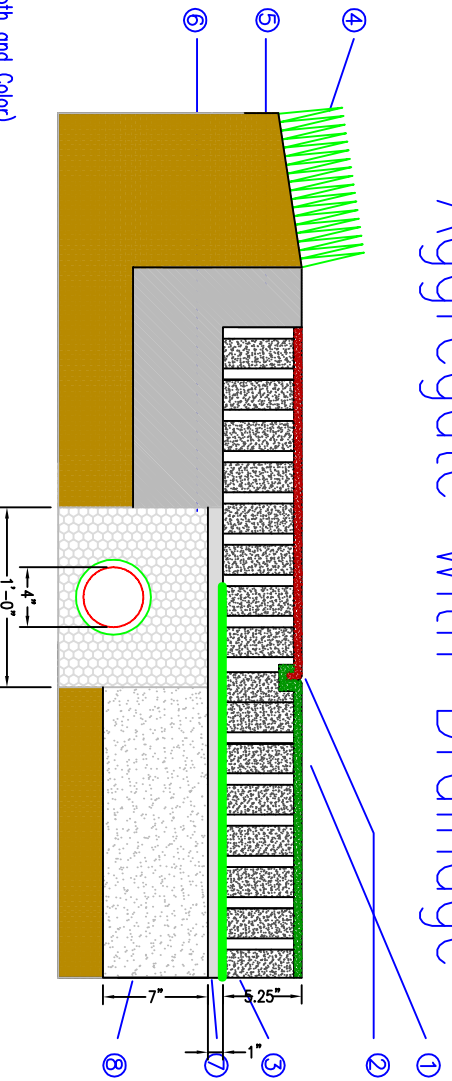

LEGEND:

- ① DuraSAFE® (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of DuraSAFE Adhesive at Each KrostLOCK® Joint.
- ③ 1.0% to 2.0% Slope – 1/8" / 12" (3mm / 300mm).
- ④ Sod
- ⑤ Containing Sidewalk/Curb/Timber
- ⑥ French Drain or Equivalent.
- ⑦ 4" Perforated Drain Tile, Covered with "Sock" or Filter Fabric.
- ⑧ 3/4" Aggregate or Clear Stone Settled to Level with Concrete Base
- ⑨ Filter Fabric to Separate Stone from Safety Surfacing.
- ⑩ 4.25" Aggregate Sub-base
- ⑪ Compacted Sub Grade as per Local Specifications.

NOTES:

1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
2. Ensure concrete drains towards drainage system.
3. Review Most Recent Installation Manual and Sub Surface Guide

DuraSAFE Thickness	Critical Fall Height (FT)	FILE NAME	Contained by Curb with Drainage	PREPARED BY	B. GOSS
2.00"	3'	REV	DESCRIPTION	DATE	
2.25"	4'	0	ORIGINAL ISSUE	08/16/2016	
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'				
5.00"	10'	SIZE	SCALE	DWG NO.	REV
5.25"	12'	A	N/A	2017-022	1



4393 DISCOVERY LINE
PETROLIA, ONTARIO
NON TRO
PHONE: (800) 263-2363
PHONE: (519) 882-8799
FAX: (519) 882-2697
EMAIL: info@softsurfaces.com