




DuraSAFE Series

Perforated for Drainage



- 1 Drill Holes Through Hollow Core Impact Pedestal To Allow Water Flow To Drain Through DuraSAFE tile.
Place Perforated DuraSAFE tile Over Sub Base Drainage
Perforating the DuraSAFE tile will not Compromise the Integrity or Warranty of our Product.

View
Underbody
of DuraSAFE
Tile

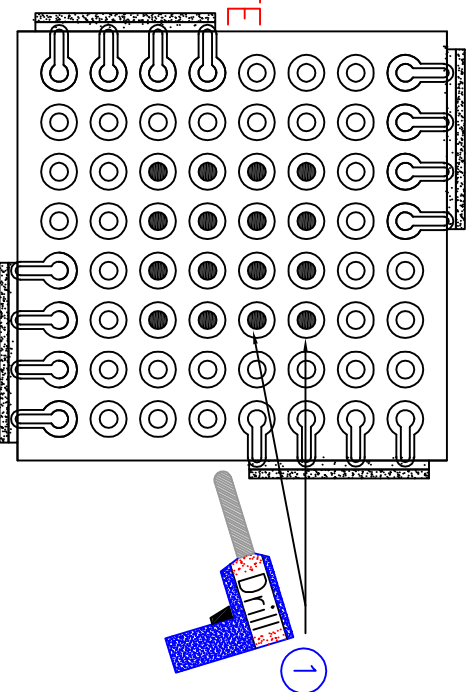

DuraSAFE Thickness	Critical Fall Height (FT)	FILE NAME	Perforated for Drainage	PREPARED BY	B. GOSS
2.00"	3'	REV	DESCRIPTION	DATE	REV
2.25"	4'	0	ORIGINAL ISSUE	08/16/2016	1
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'	SIZE	SCALE	DWG NO.	REV
5.00"	10'	A	N/A	2017-010	1
5.25"	12'				



4393 DISCOVERY LINE
PETROLIA, ONTARIO
NON TRD
PHONE: (800) 263-2363
PHONE: (519) 882-8799
FAX: (519) 882-2697
EMAIL: info@softsurfaces.com