




DuraSAFE Series

Over Concrete Contained by Curb

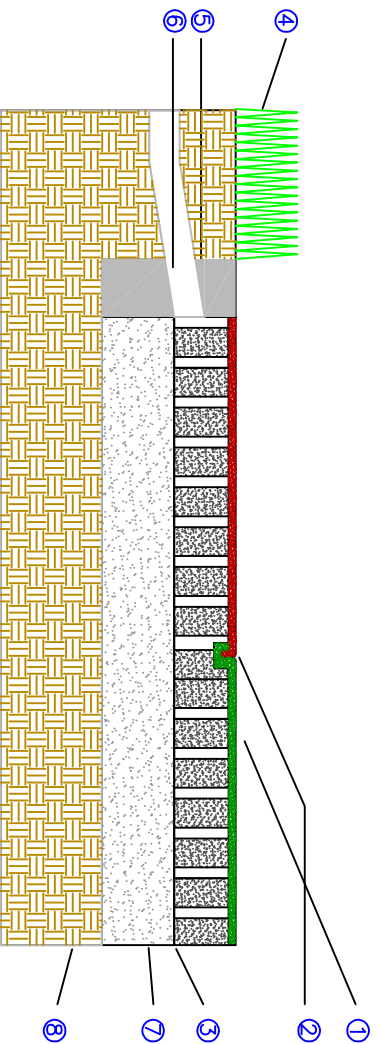

LEGEND:

- ① DuraSAFE® (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of DuraSAFE® Adhesive at Each KrosLOOK Joint.
- ③ 1.0% Slope – 1/8" / 12" (3mm / 300mm).
- ④ Sod
- ⑤ Containing Sidewalk/Curb/Timber
- ⑥ Containing Sidewalk/Curb With Concrete Keyway Drain
- ⑦ Concrete Sub-base
- ⑧ Compacted Subgrade.

NOTES:

1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
2. Ensure concrete drains towards drainage system.
3. Review Most Recent Installation Manual and Sub Surface Guide

DuraSAFE Thickness	Critical Fall Height (FT)	FILE NAME	Over Concrete Contained by Curb	PREPARED BY	B. GOSS
2.00"	3'	REV	DESCRIPTION	DATE	
2.25"	4'	0	ORIGINAL ISSUE	08/16/2016	
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'	SIZE	SCALE	DWG NO.	REV
5.00"	10'	A	N/A	2017-022	1
5.25"	12'				



4393 DISCOVERY LINE
 PETROLIA, ONTARIO
 NON TRO
 PHONE: (800) 263-2363
 PHONE: (519) 882-8799
 FAX: (519) 882-2697
 EMAIL: info@softsurfaces.com