




# DuraSAFE Series

DuraSAFE contained by a Ramp

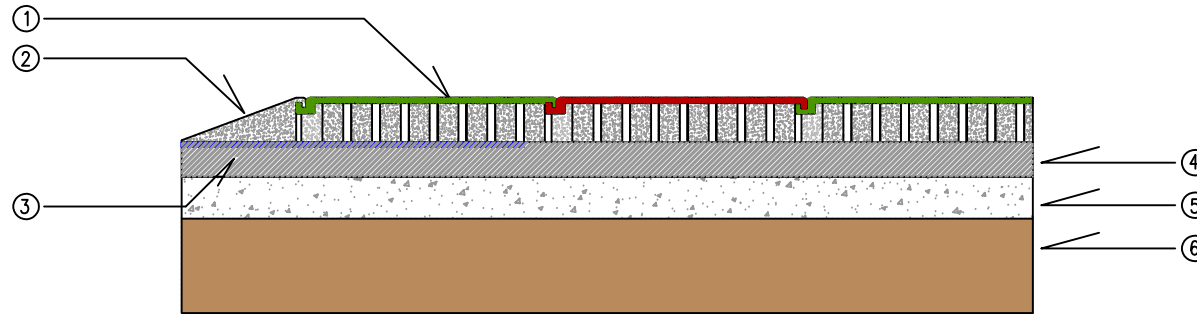

## LEGEND:

- ① DuraSAFE<sup>®</sup> tile (See Specifications for Depth and Color).
- ② SofRAMP (ADA) or Standard SofRAMP Jr (See Specifications for Details).
- ③ Scarify the Entire Surface Area of Perimeter SofRAMPS and the Adjacent 2' of Tile. Apply DuraSAFE Adhesive to Entire Bottom Edge and locking joint of SofRAMP and DuraSAFE tile.
- ④ Concrete or Asphalt Base and Curb (See Specifications for Depth and Details).
- ⑤ Compacted Granular A Type I
- ⑥ Compacted Subgrade.  
1.0% Slope - 1/8" / 12" (3mm / 300mm).

## NOTES:

1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
2. Ensure subsoil drains towards drainage system.
3. Review Most Recent Installation Manual and Sub Surface Guide

DuraSAFE Thickness	Critical Fall Height (FT)	FILE NAME DuraSAFE contained by ramp		PREPARED BY B. GOSS	
2.00"	3'	REV	DESCRIPTION	DATE	
2.25"	4'	0	ORIGINAL ISSUE	06/05/19	
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'				
5.00"	10'	SIZE	SCALE	DWG NO.	REV
5.25"	12'	A	N/A	2019-024	1



4393 DISCOVERY LINE  
 PETROLIA, ONTARIO  
 NON 1R0  
 PHONE: (800) 263-2363  
 PHONE: (519) 882-8799  
 FAX: (519) 882-2697  
 EMAIL: info@sofsurfaces.com