

## LED Backlit Panel (72W)

### Features:

- Input Voltage: 100-277VAC 50/60Hz.
- UL certified.
- 120-130 lm/W high lumen efficacy, 80+ CRI.
- 0-10V UL listed high efficiency LED driver.
- High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.
- Instant startup, soft light, no glare, no noise, **no strobe**.
- Easy for installation.




### Application:

- ◆ Factory, offices .
- ◆ Living room, clubs, lobbies.
- ◆ Supermarkets, school, hotel.
- ◆ Exhibitions, etc..



### Product Dimension:

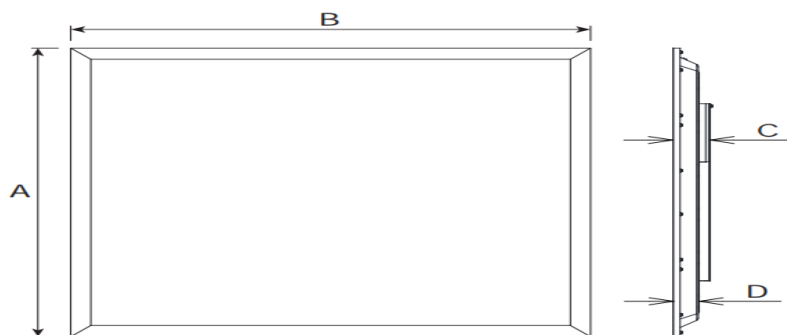

## Dimension (mm)

| A   | B    | C  | D  |
|-----|------|----|----|
| 603 | 1213 | 36 | 32 |

## Specifications

### 4000K

|                        |                      |
|------------------------|----------------------|
| Model:                 | KIPA605N6031210 (BL) |
| Wattage:               | 72W                  |
| Lumens:                | 8352LM               |
| CCT:                   | 4000K                |
| Input Voltage:         | 100-277VAC 50/60hz   |
| Power Factor:          | >0.9                 |
| Efficacy:              | 116LM/W              |
| CRI:                   | >80                  |
| THD:                   | <20                  |
| Dimmable:              | Yes                  |
| Dimensions:            | 2*4FT 603*1213mm     |
| Lifespan               | >50,000hours         |
| Beam angle             | 120°                 |
| Operating Temperature: | -20°C to 50°C        |
| IP Grade:              | IP20                 |
| Certification:         | UL                   |

### 5000K

|                        |                      |
|------------------------|----------------------|
| Model:                 | KIPA605N6031210 (BL) |
| Wattage:               | 72W                  |
| Lumens:                | 8640LM               |
| CCT:                   | 5000K                |
| Input Voltage:         | 100-277VAC 50/60hz   |
| Power Factor:          | >0.9                 |
| Efficacy:              | 120LM/W              |
| CRI:                   | >80                  |
| THD:                   | <20                  |
| Dimmable:              | Yes                  |
| Dimensions:            | 2*4FT 603*1213mm     |
| Lifespan               | >50,000hours         |
| Beam Angle             | 120°                 |
| Operating Temperature: | -20°C to 50°C        |
| IP Grade:              | IP20                 |
| Certification:         | UL, DLC              |

## 6000K


|                        |                      |
|------------------------|----------------------|
| Model:                 | KIPA605N6031210 (BL) |
| Wattage:               | 72W                  |
| Lumens:                | 8712LM               |
| CCT:                   | 6000K                |
| Input Voltage:         | 100-277VAC 50/60hz   |
| Power Factor:          | >0.9                 |
| Efficacy:              | 121LM/W              |
| CRI:                   | >80                  |
| THD:                   | <20                  |
| Dimmable:              | Yes                  |
| Dimensions:            | 2*4FT 603*1213mm     |
| Lifespan               | >50,000hours         |
| Beam angle             | 120°                 |
| Operating Temperature: | -20°C to 50°C        |
| IP Grade:              | IP20                 |
| Certification:         | UL                   |

## Package

| Size        | Qty/Carton | Gross Weight | Net Weight |
|-------------|------------|--------------|------------|
| 124*25*63cm | 6          | 25.9kg       | 23.5Kg     |

## Installation instructions

**Recessed**

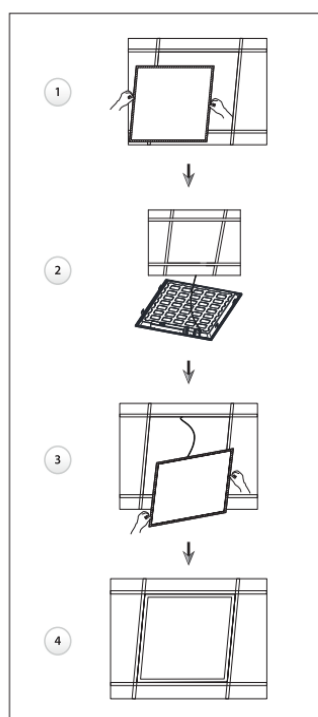

**Suspended**

