
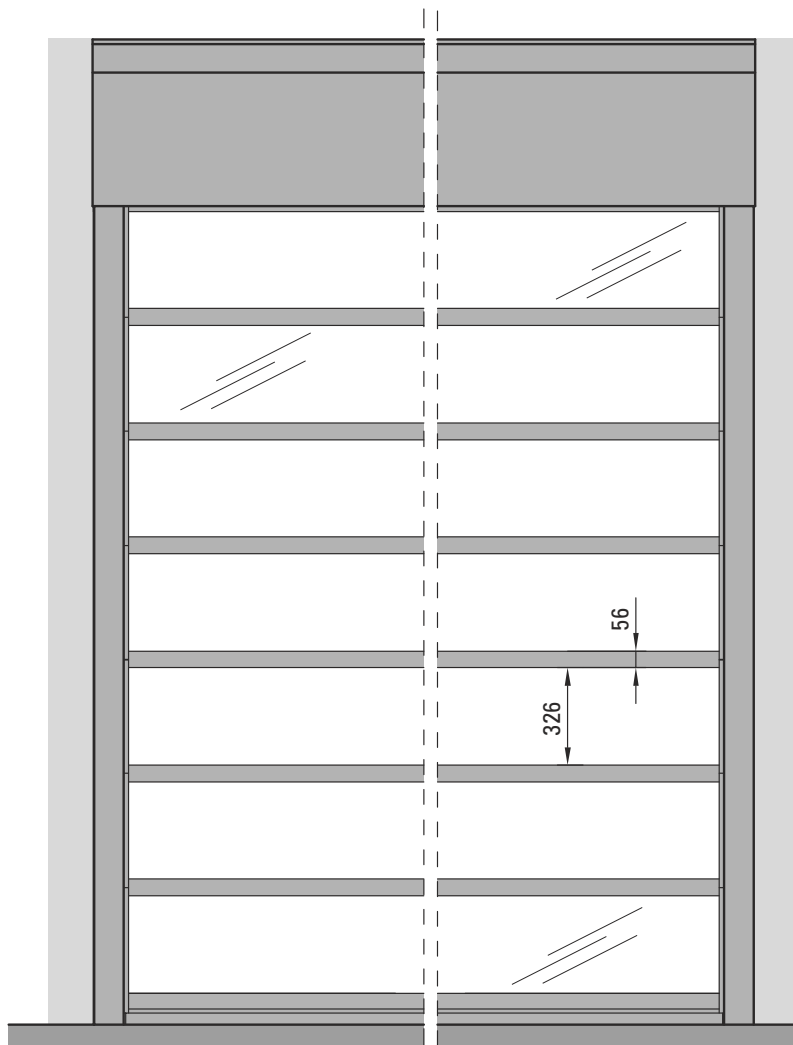


Butzbach GmbH
Industrietore
Weiherstraße 16
89293 Kellmünz (Germany)


Tel. +49 8337 901-0
Fax +49 8337 901-49
info@butzbach.com
www.butzbach.com

BUTZBACH
DOORS + FAÇADES

Technical Data Mobile Partition Wall

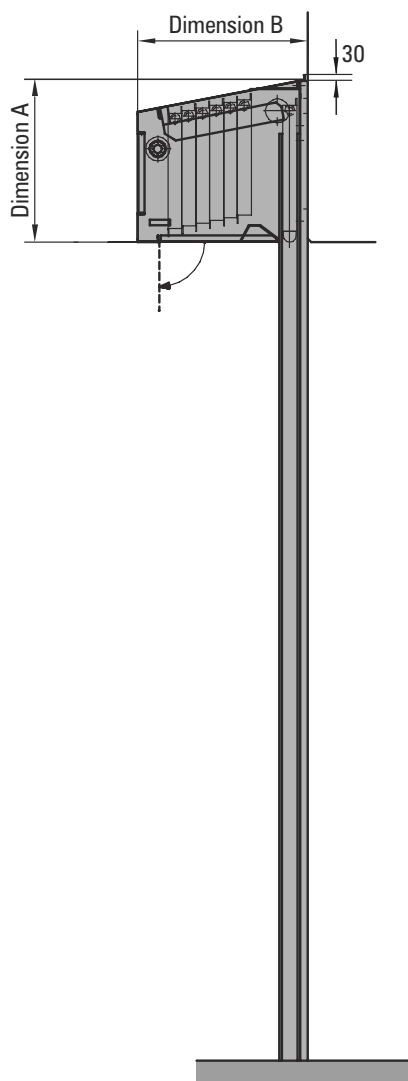

Dimensions	without mounting frame		including mounting frame	
	A	B	A	B
Up to 7 door panels	530	550	535	575
8-10 door panels	555	690	560	715
11-12 door panels	555	780	560	805

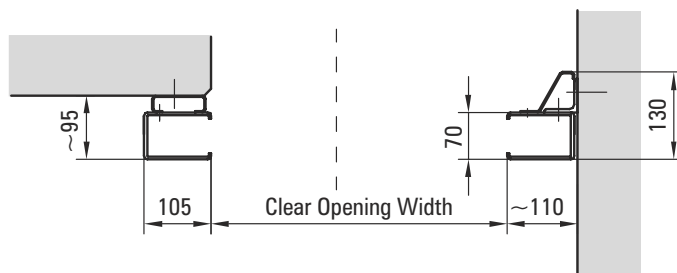

Technical Data

Mobile Partition Wall

Mains connection	(supplied by contractor) 230 V/ 50 Hz ¹ ; pre-fuse 10 A
Drive unit/ motor power	740 W/ 780 W/ 810 W; mode: short-time operation KB 5 min Note! The operator is responsible for the door inspection according to the VDE 100-610 or IEC 60364-6-61 respectively. For a three-phase current connection a »clockwise rotating field« has to be applied.
Control voltage	230 V AC
Control system	Reversing switch in dead-man's control; option: Self-holding circuit, reversing automatically if safety edge was actuated.
Material of the door panels	Either tempered safety glass (6 mm thick) or polycarbonate (5 mm thick). Upon request: panels with colour coated aluminium sheet metal (3 mm) or laminated glass (11 or 13 mm thick).
Material of the tracks	Aluminium extruded section, surface anodized - natural colour - (according to DIN 17611, E6 EV1); option: surface colour-anodized (according to DIN 17611) or alternatively RAL-colour coated.
Material of the frame profiles	For panel widths < 4 021 mm: Aluminium; \geq 4 021 mm: Aluminium with V2A-reinforcement; surface anodized - natural colour - (according to DIN 17611, E6 EV1); option: RAL-colour coated (according to DIN 17611).
Opening-/closing speed	3 m/min
Dimensions	Clear opening width: min. 0.8 m / max. 5.50 m; clear opening height: max. 4.65 m depending on the total weight of the Mobile Partition Wall. Larger clear opening widths: Supported by a movable mullion.
Safety	Anti-drop device Butzbach AS TW PG, sensitive edge with mechanical contactor via forced-opening safety contacts; burglar retardant due to an automatic lock function of the closed partition wall; mechanical overload protection.
Emergency operation	With crank handle (sun-blind handle), operational from standing position.
Care	With plain water and a common, commercially available glass cleaning agent.

¹ Depending on size and design, a mains connection of 400 V/ 50 Hz and a 10 A three phase current automation (supplied by contractor) may be necessary.