

ULTRA-TECH™ LIGHTING


STERILE-BRIGHT™

250-Watt Convertible Ceiling Unit

STRL-CU-250 WUV

Key Features:

- Superior UV and Ozone generation for disinfectant purposes, disinfecting some rooms in 5 minutes or less
- Patented Sterile-Bright™ LumenTec® tuned spectrum for better emission levels with 100,000 hours of life cycle of continuous use
- Compact design, with a powerful sanitizing reach

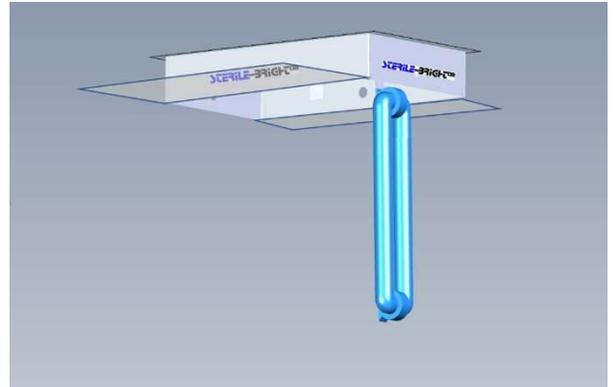

1 x 250w lamp, doors open, lamp extended

Applications:

Ideal for:

Airplanes, public buses, school buses, trains, subway cars, kitchens, restaurants, hospital rooms, classrooms, office spaces, daycare centers, locker rooms, showers, theaters... etc.

Methods of Operation:

UV + Ozone:

Exposed bulb provides UV and Ozone sterilization with air circulation by the areas own HVAC system.



Live photo of an active 250-watt lamp

Contact: O&M Resources, Inc., 13201 N.W. Freeway, Ste. 800, Houston, TX 77040
Office: 281-456-3568, Email: Info@omresources.net

STERILE-BRIGHT™ 250-Watt Convertible Ceiling Unit STRL-CU-250 WUV

Technical Specifications:


- Higher energy output at 180-457nm using LumenTec® and Vari-Beam® technologies
- Lamps - 100,000-hour (11 year) life cycle of continuous use
- 110Vac 60hz, 0.98 power factor with patented waveform technology
- 1 x 250-watt lamp
- Induction lamp technology, instant on and re-strike, no warm-up/cool down
- OZONE disinfectant generation for complete area sterilization
- Standard: UV resistant powder coated metal housing;
Stainless Steel - Optional
- Automatic doors for protection of the lamp
- Automatic lamp extension and retraction
- Dimensions closed, 20" L x 9" W x 6" D
- Surface mounting, *optional: Flush-mount, 1x2 Grid-mount*



Open Doors lamp retracted

Optional Features:

- Keyed operation for authorized use by trained personnel
- Motion sensor - deactivates the unit in the event of unauthorized entry in the area
- Ozone sensor - monitors and indicates safe and permissible Ozone levels
- Time-delay start - provides adequate time for personnel to exit before disinfecting begins
- Run Timer - controls disinfectant time and automatically shuts down the unit when disinfecting is complete
- Remote Control
- Stainless Steel Housing
- Mounting: flush mounting or 1x2 ceiling grid mount

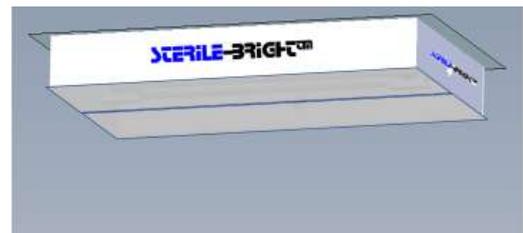

Closed unit

Warranty against manufacturer defects:

- Lamps 7 years
- Ballasts 5 years
- Other components 1 year



Note: Certifications are on the current Sterile-Bright fixture will also apply to this model upon final testing

Contact: O&M Resources, Inc., 13201 N.W. Freeway, Ste. 800, Houston, TX 77040
Office: 281-456-3568, Email: Info@omresources.net

