

ULTRA-TECH™ LIGHTING

STERILE-BRIGHT™

400/1200-Watt Ceiling Dropdown Pendant Unit

STRL-DD-400/1200 WUV

Key Features:

- Superior UV and Ozone generation for disinfectant purposes, disinfecting some rooms in 5 minutes or less
- Patented Sterile-Bright™ LumenTec® tuned spectrum for better emission levels with 100,000 hours of life cycle of continuous use
- Compact design, with a powerful sanitizing reach

Applications:

Ideal for:

gymnasiums, churches, auditoriums, stadiums, conference centers, indoor parks, hotels, retail stores... etc.



Methods of Operation:

UV + Ozone:

Exposed bulb provides UV and Ozone sterilization with air circulation by the areas own HVAC system providing total disinfecting of large areas.

Technical Specifications:

- Higher energy output at 180-457nm using LumenTec® and Vari-Beam® technologies
- Lamps - 100,000-hour (11 year) life cycle of continuous use
- Auto sensing ballast 110-277Vac 60hz, 0.98 power factor with patented waveform technology
- 1 x 400-watt lamp or 3 x 400-watt lamp configurations
- Induction lamp technology, instant on and re-strike, no warm-up/cool down
- OZONE disinfectant generation for complete area sterilization
- Standard: UV resistant powder coated metal housing; *Stainless Steel - Optional*
- Automatic lamp extension and retraction (*optional*)
- Dimensions closed, 1 lamp unit 62" Tall x 23" Diameter, 3 lamp unit 62" Tall x 33" Diameter

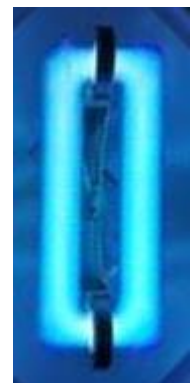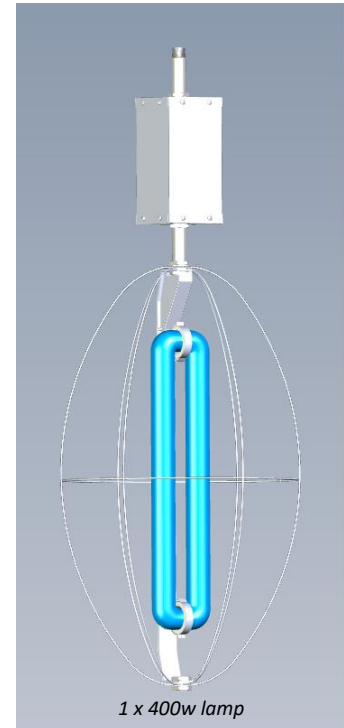


Live photo of an active
250-watt lamp

Contact: O&M Resources, Inc., 13201 N.W. Freeway, Ste. 800, Houston, TX 77040
Office: 281-456-3568, Email: Info@omresources.net



STERILE-BRIGHT™
400/1200-Watt Ceiling Dropdown Pendant
Unit STRL-DD-400/1200 WUV

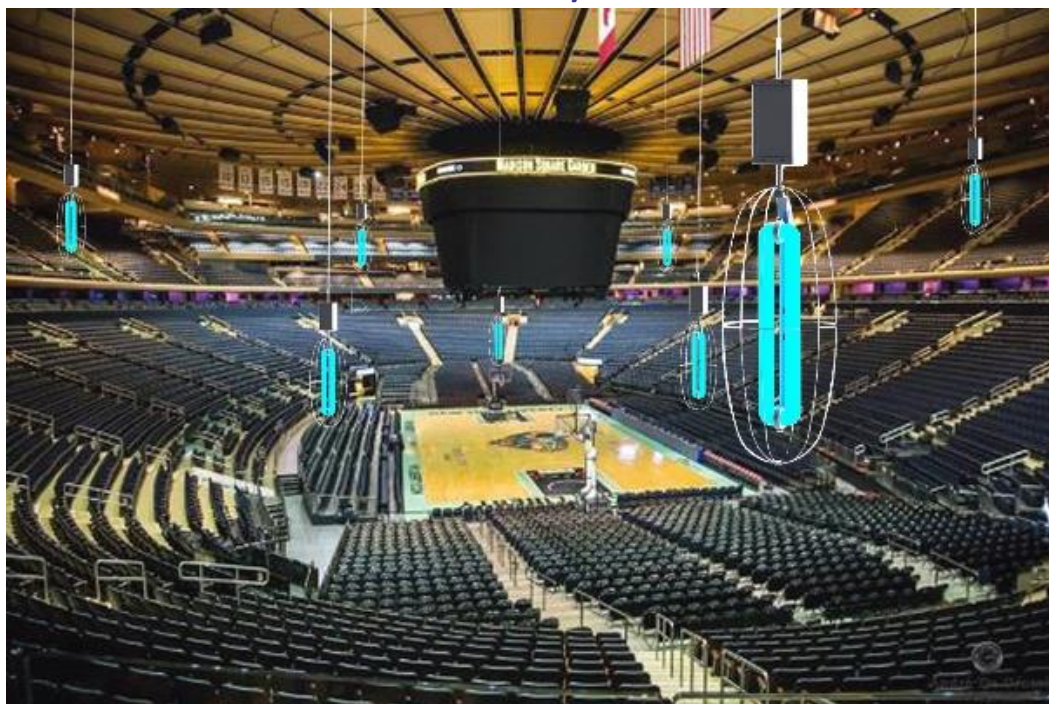

Rendering of Arena Application

Optional Features:

- Wireless Motion sensors - deactivates the unit in the event of unauthorized entry into the area
- Wireless Ozone sensors - monitors and indicates safe and permissible Ozone levels
- Time- delay start - provides adequate time for personnel to exit area before disinfecting begins
- Run Timer - controls disinfectant time and automatically shuts down the unit when disinfecting is complete
- Wireless Remote Control – for remote operation up to 250 meters away from the control module
- Stainless Steel - Housing
- Mounting – automatic raising and lowering system

Warranty against manufacturer defects:

- Lamps - 7 years
- Ballasts - 5 years
- All other components - 1 year



Note: Certifications on the current Sterile-Bright fixture will also apply to this model upon final testing

Contact: O&M Resources, Inc., 13201 N.W. Freeway, Ste. 800, Houston, TX 77040
Office: 281-456-3568, Email: Info@omresources.net