


CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

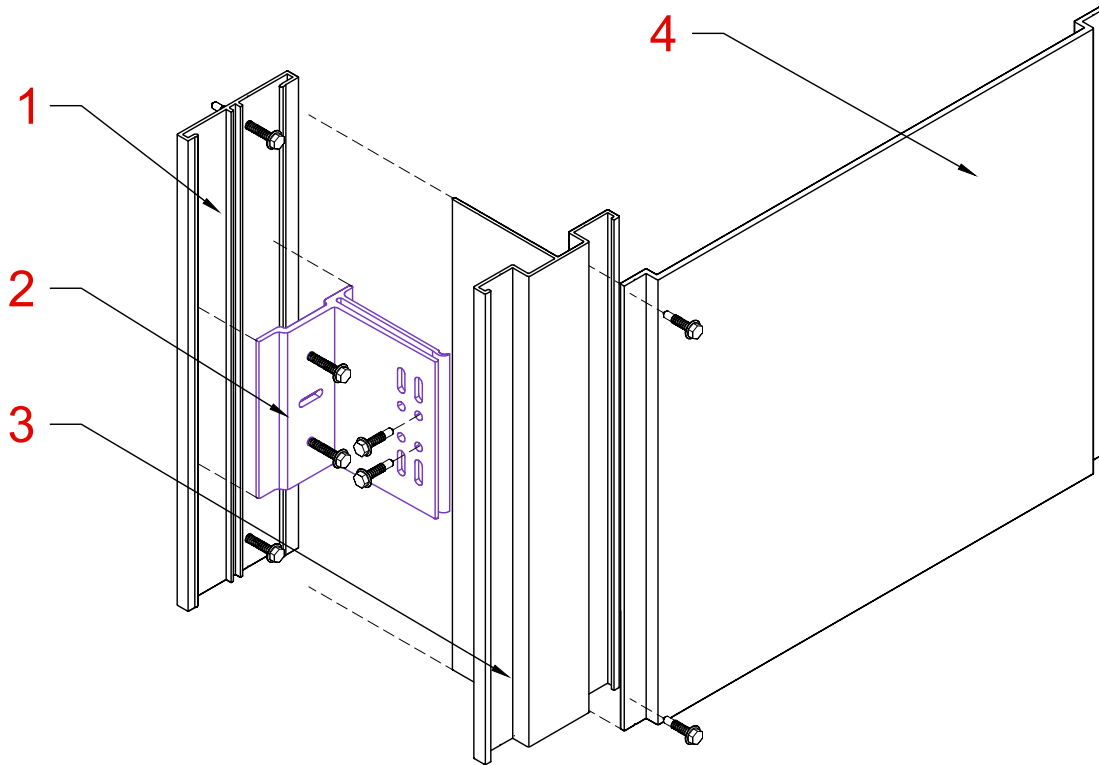

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER		
#1 CL 300 Base Track		
#2 THERMAClip™		
#3 CL 300 T-Track		
#4 Flush-Mount (Continuous 10')		

FASTENER TYPES:

T-Track

#10 X 3/4 OR 1 HWH SS SDS



THERMACLIP™ to Base Track

#12 X 1 OR 1-1/2 HWH SS SDS



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER



CL 300 - Thermally Isolated Cladding Support System Isometric Diagram SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
CL 300


DATE: 03-22-2022

Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

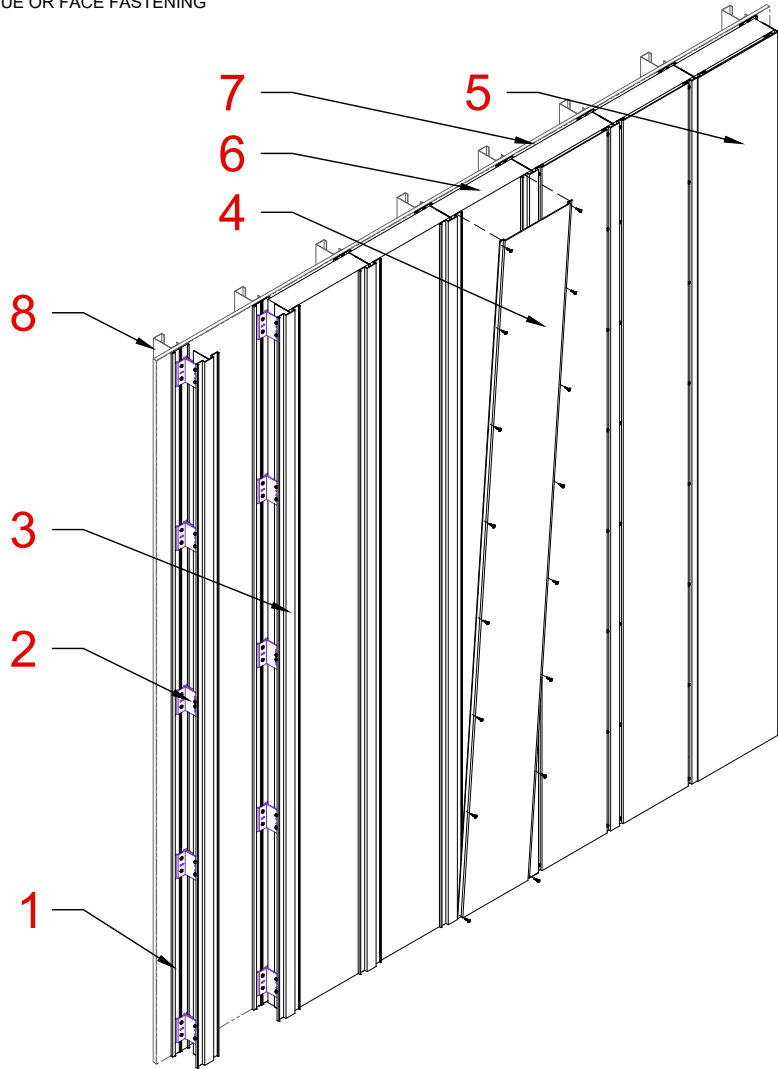

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	Provided By: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 T-Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

T-Track

#10 X 3/4 OR 1 HWH SS SDS



THERMACLIP™ to Base Track

#12 X 1 OR 1-1/2 HWH SS SDS



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER



CLADIATOR™
Built to Conquer New Challenges

CL 300 - Thermally Isolated Cladding Support System Isometric Diagram SCALE: 3" = 1' - 0"

**SYSTEM SHOWN:
CL 300**


DATE: 03-22-2022

Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

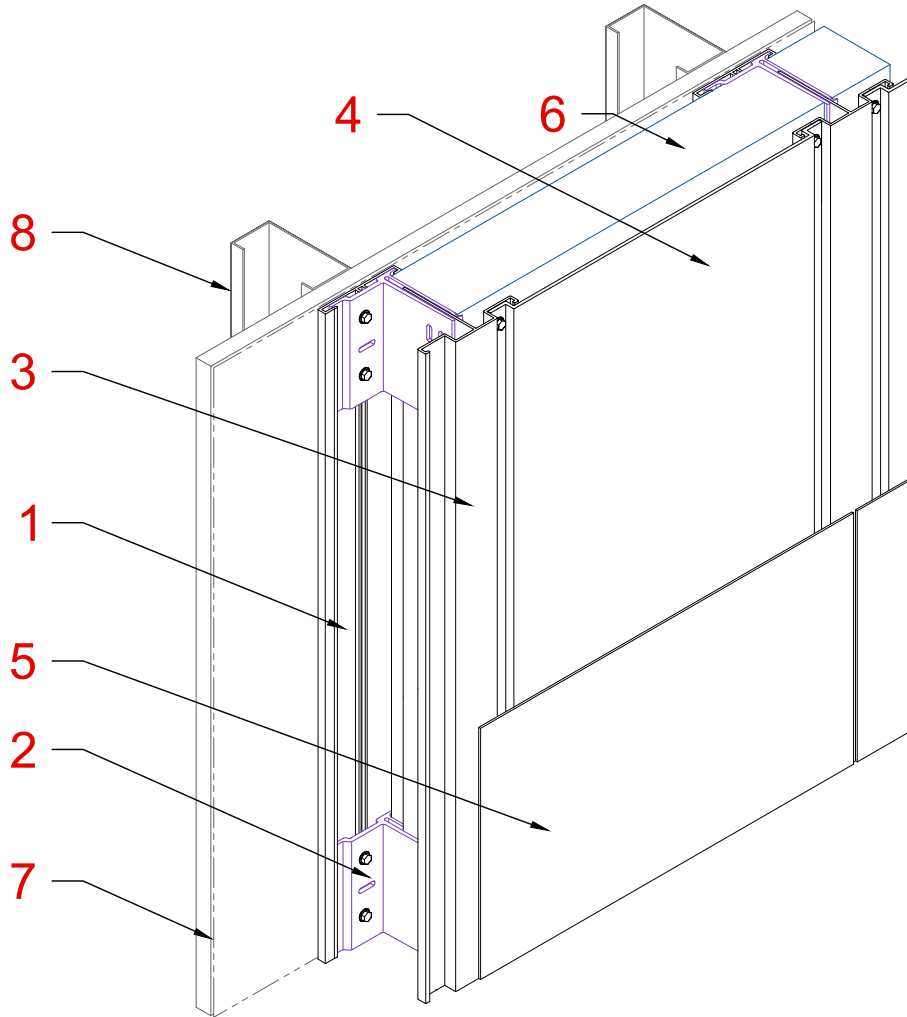

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	Provided By: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 T-Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

T-Track

#10 X 3/4 OR 1 HWH SS SDS



THERMACLIP™ to Base Track

#12 X 1 OR 1-1/2 HWH SS SDS



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER



CL 300 - Thermally Isolated Cladding Support System Isometric Diagram SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
CL 300


DATE: 03-22-2022

Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

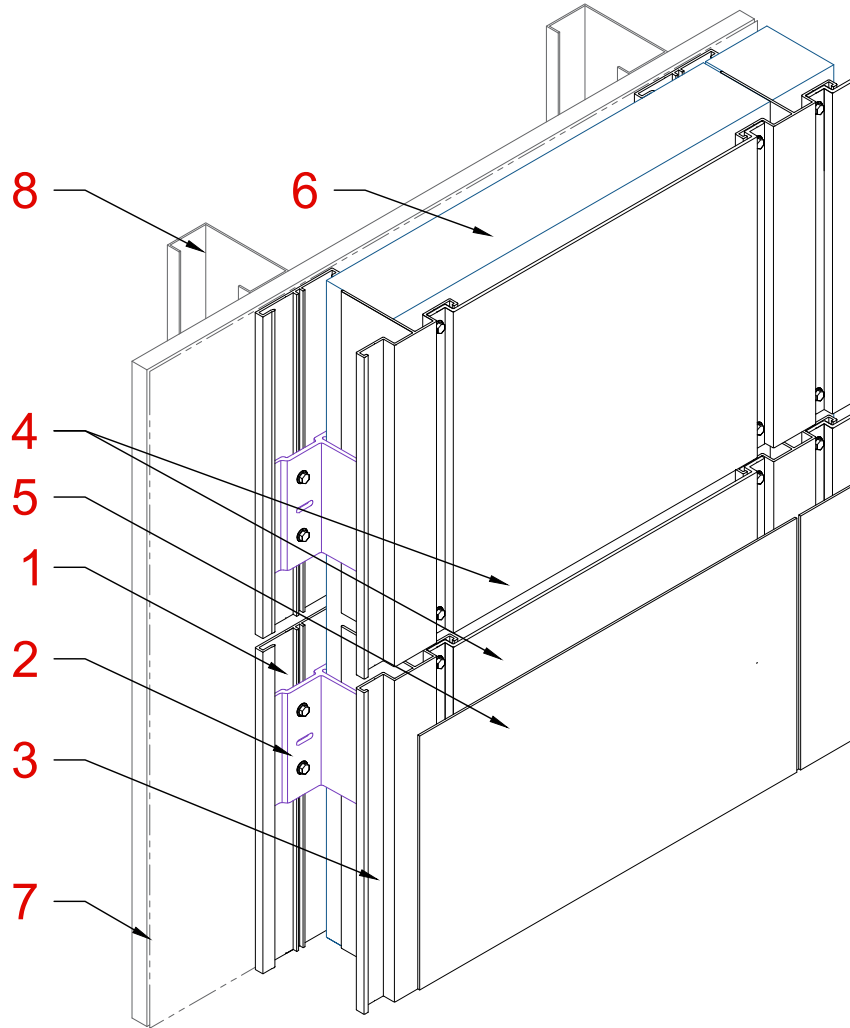

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	Provided By: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 T-Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

T-Track

#10 X 3/4 OR 1 HWH SS SDS



THERMACLIP™ to Base Track

#12 X 1 OR 1-1/2 HWH SS SDS



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER



CLADIATOR™
Built to Conquer New Challenges

CL 300 - Thermally Isolated Cladding Support System Isometric Diagram SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
CL 300


DATE: 03-22-2022

Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

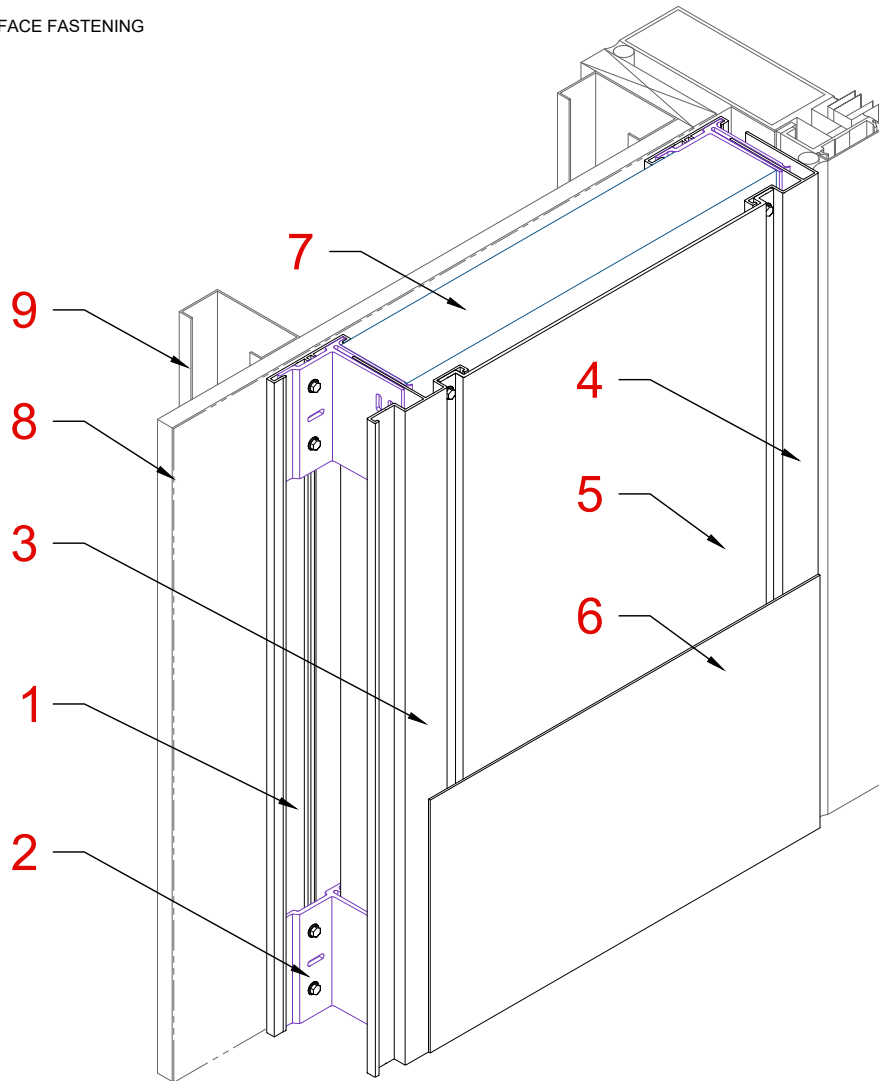

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER		Provided By: OTHERS
#1 CL 300 Base Track	#5 Flush-Mount (Continuous 10')	#6 Panel
#2 THERMAClip™		#7 Insulation
#3 CL 300 T-Track		#8 Moisture Barrier
#4 CL 300 Termination Track		#9 Masonry/Stud Wall

FASTENER TYPES:

T-Track

#10 X 3/4 OR 1 HWH SS SDS



THERMACLIP™ to Base Track

#12 X 1 OR 1-1/2 HWH SS SDS



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER



CL 300 - Thermally Isolated Cladding Support System Isometric Diagram SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
CL 300


DATE: 03-22-2022

Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

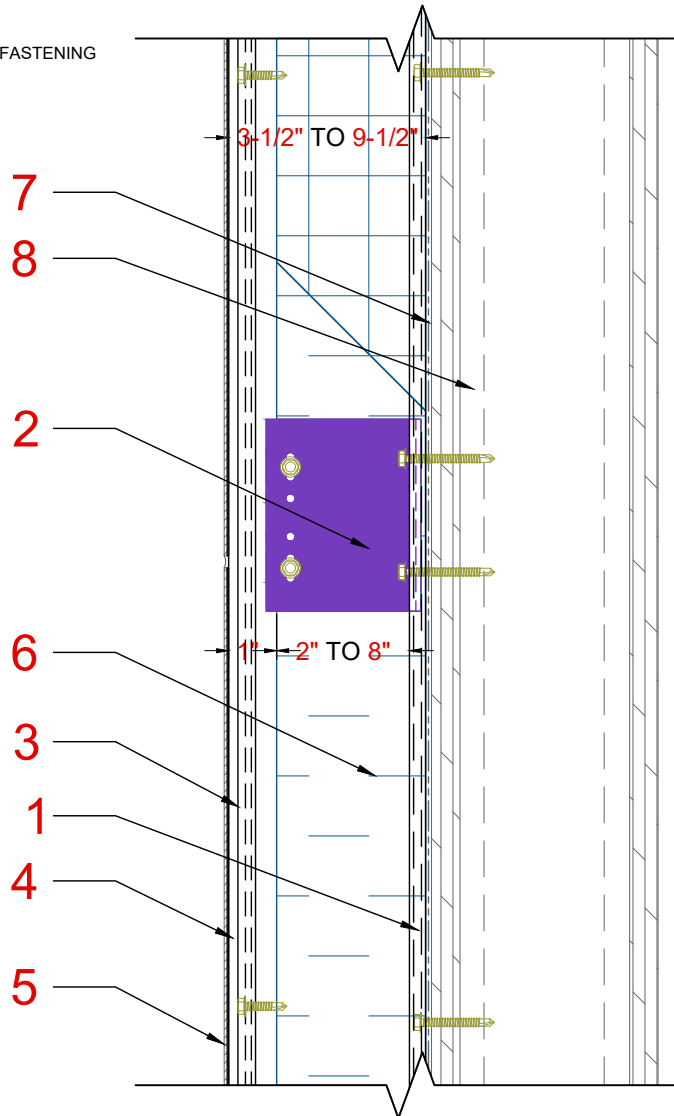

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 T-Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER



CL 300 - Thermally Isolated Cladding Support System
Section Detail
SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300


DATE: 03-22-2022

Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

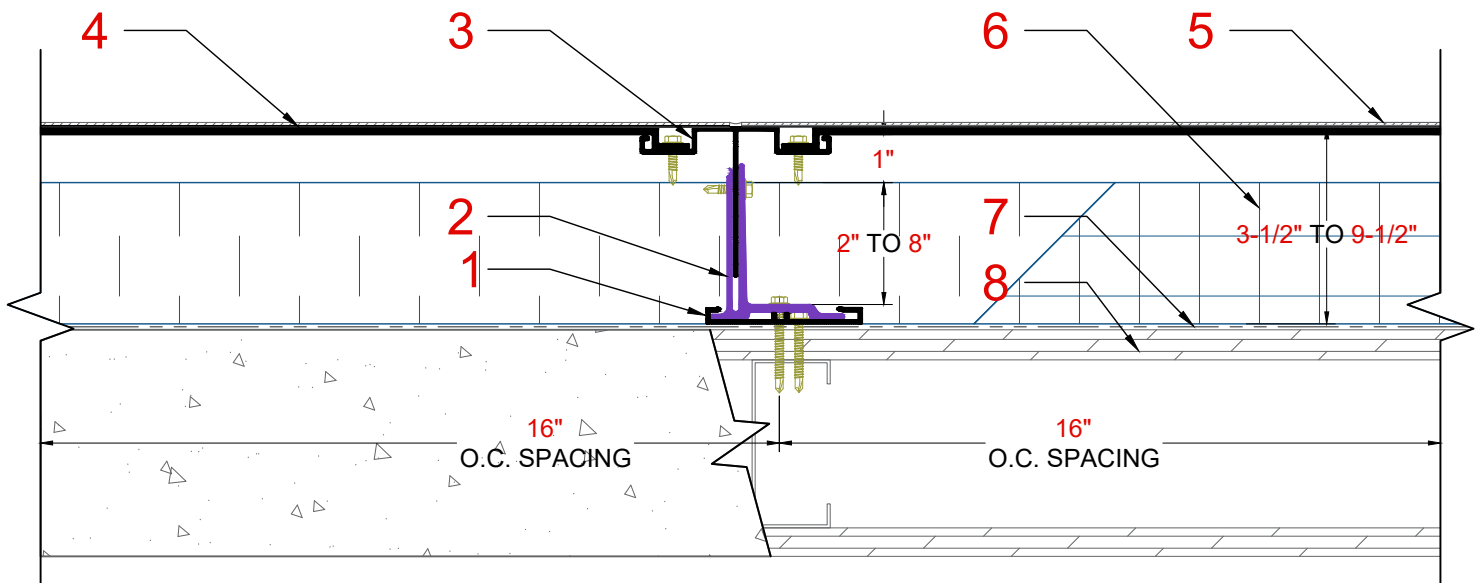

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 T-Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System Plan Detail SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022




Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

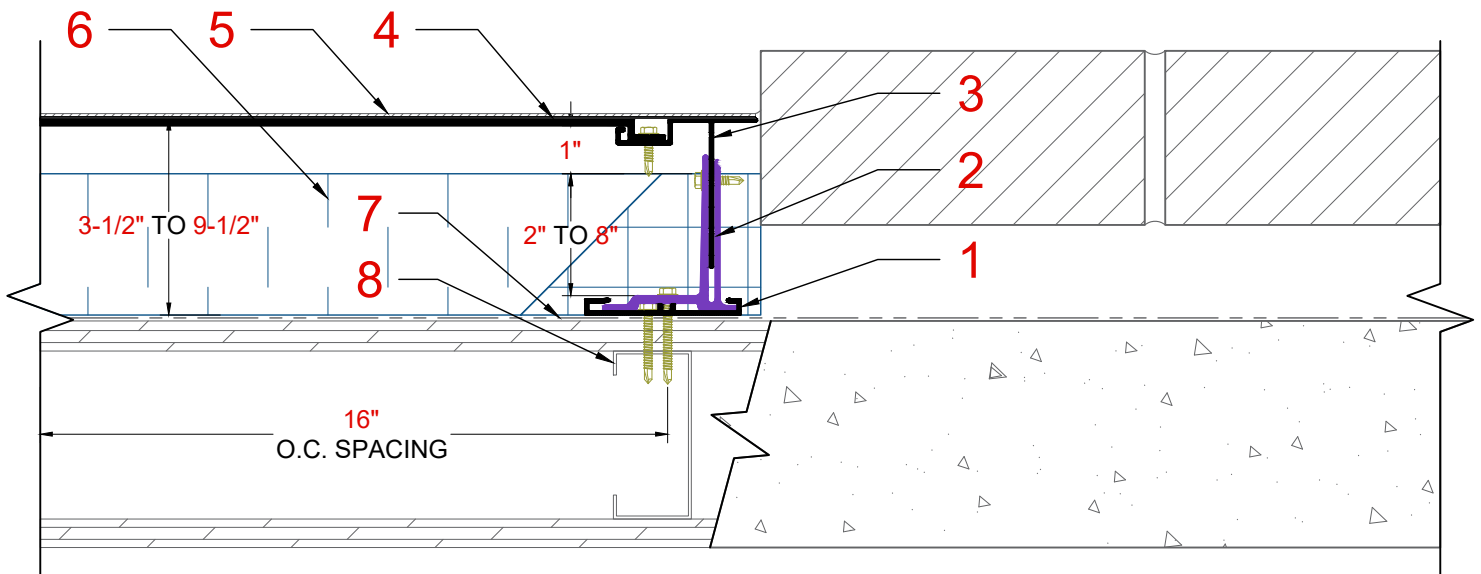

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 Inside Corner Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System
Brick Termination Detail
SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022




Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

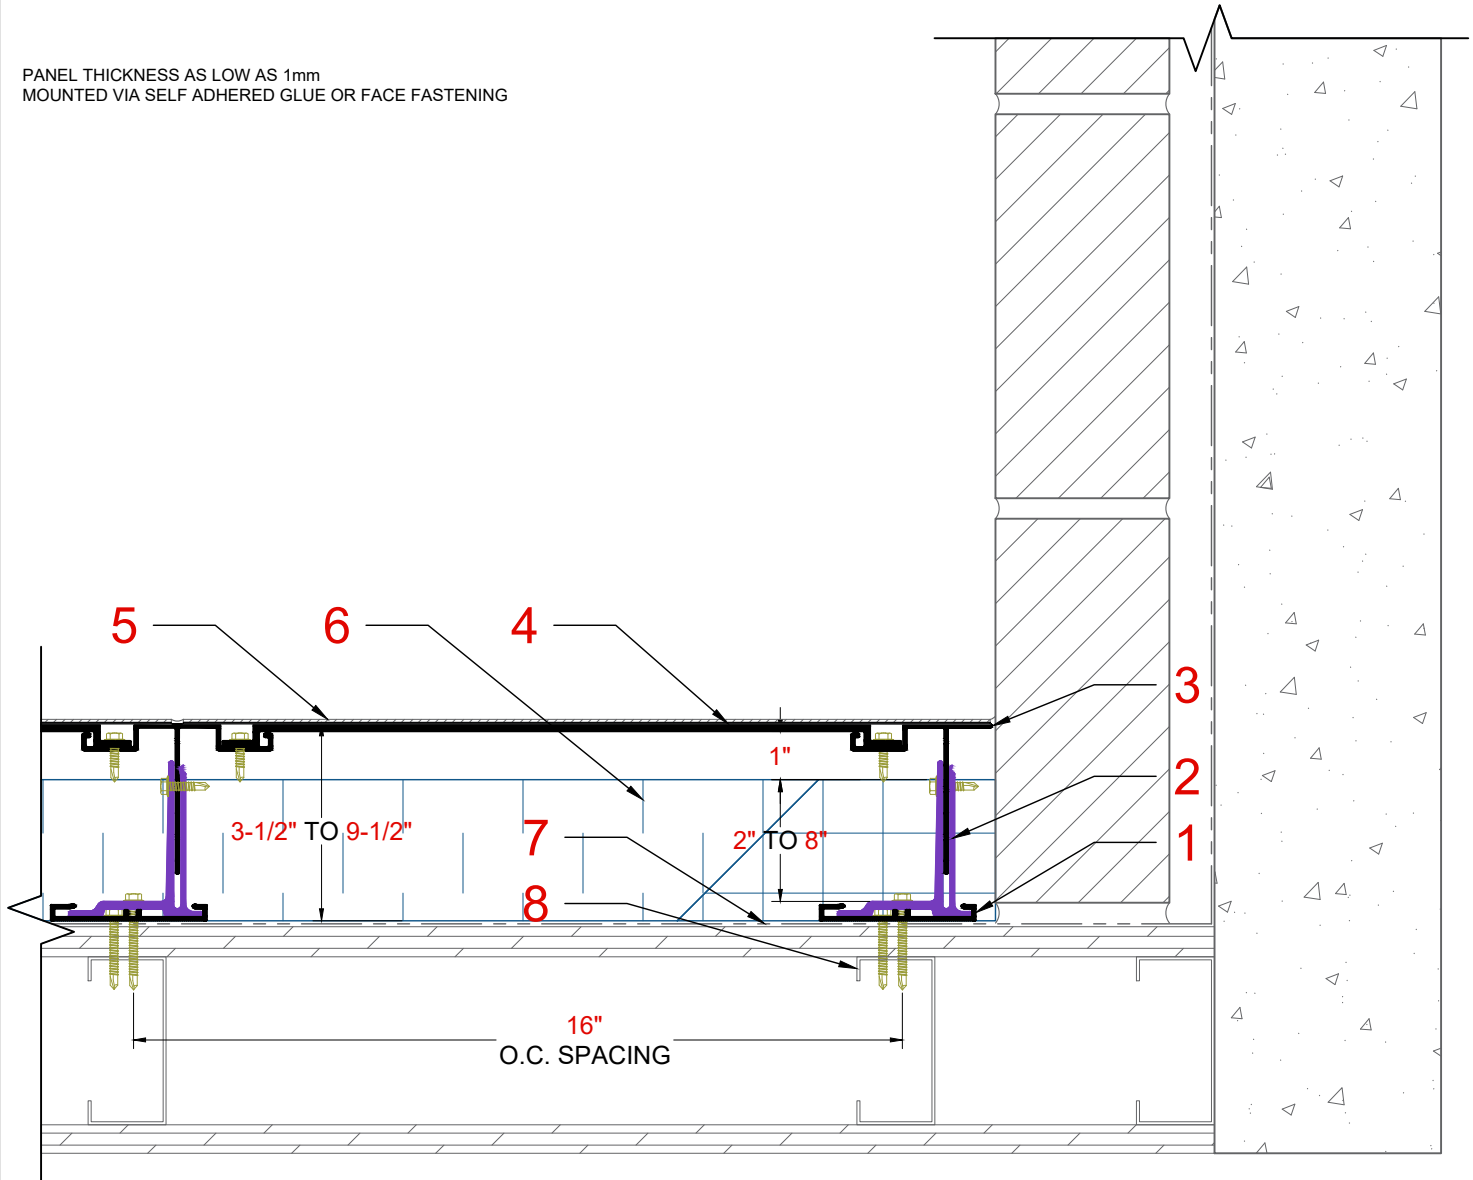

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 Inside Corner Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System
Brick Termination Detail
SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022




Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

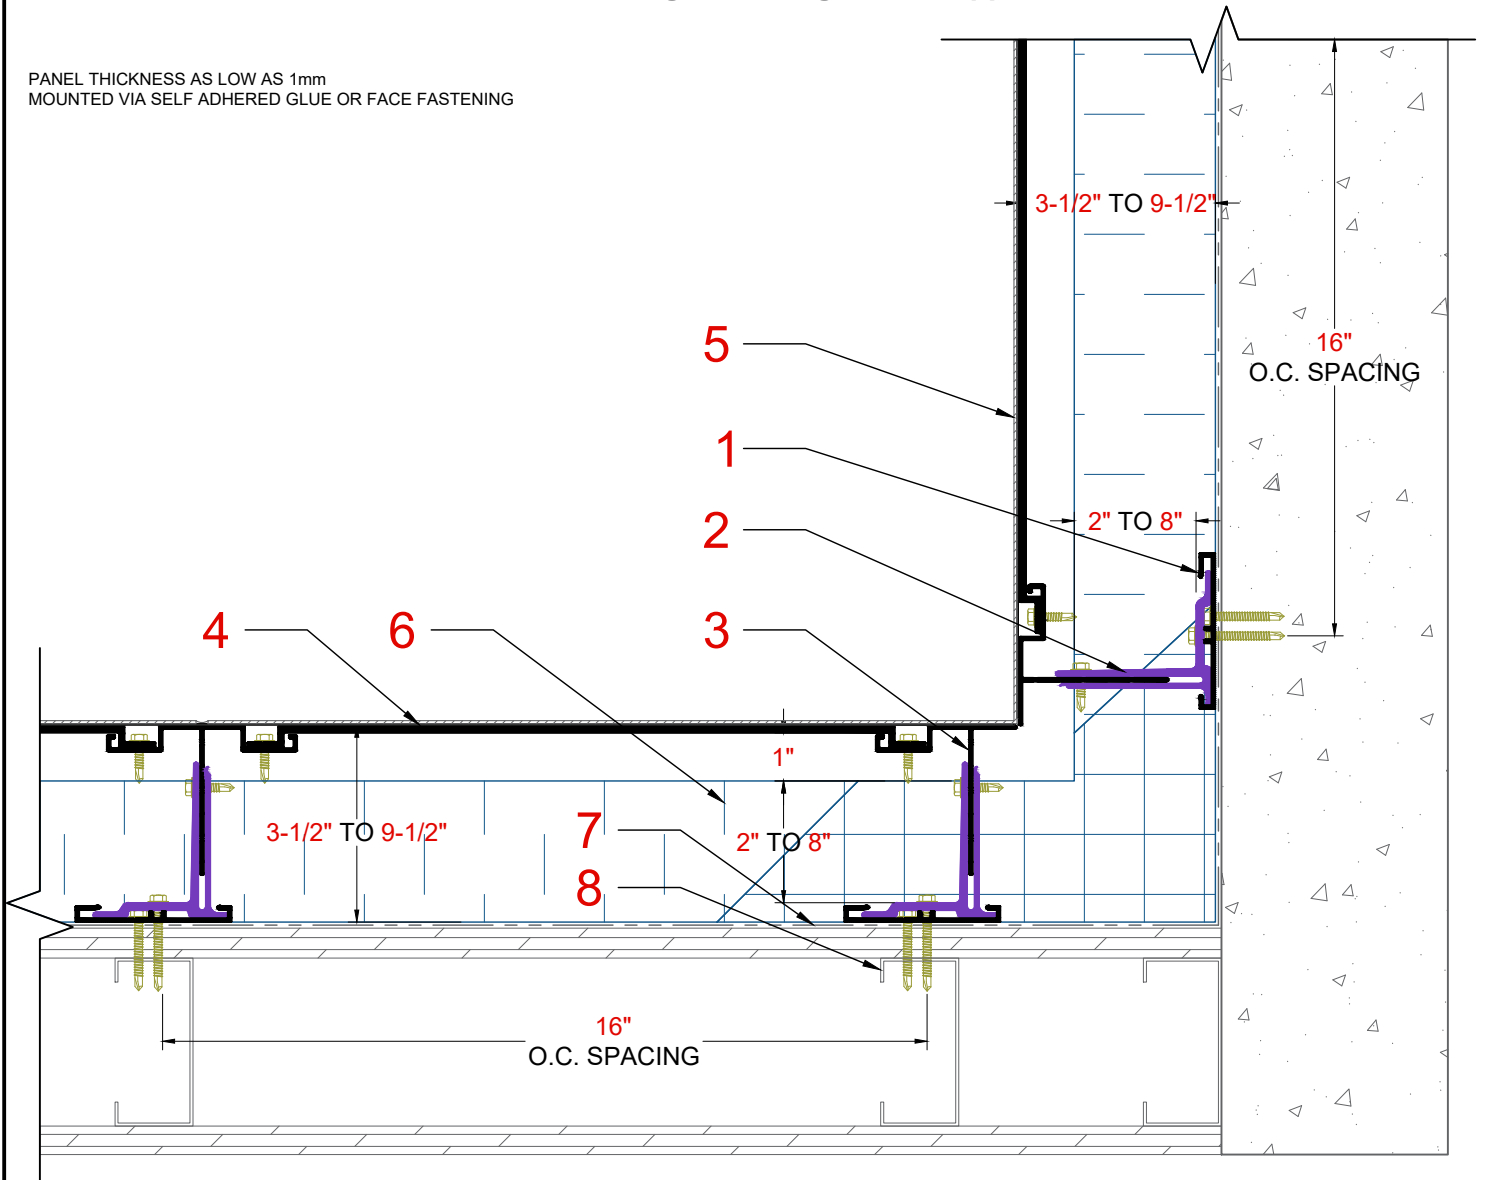

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH


PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 Inside Corner Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System
Inside Corner Detail
SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022




Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

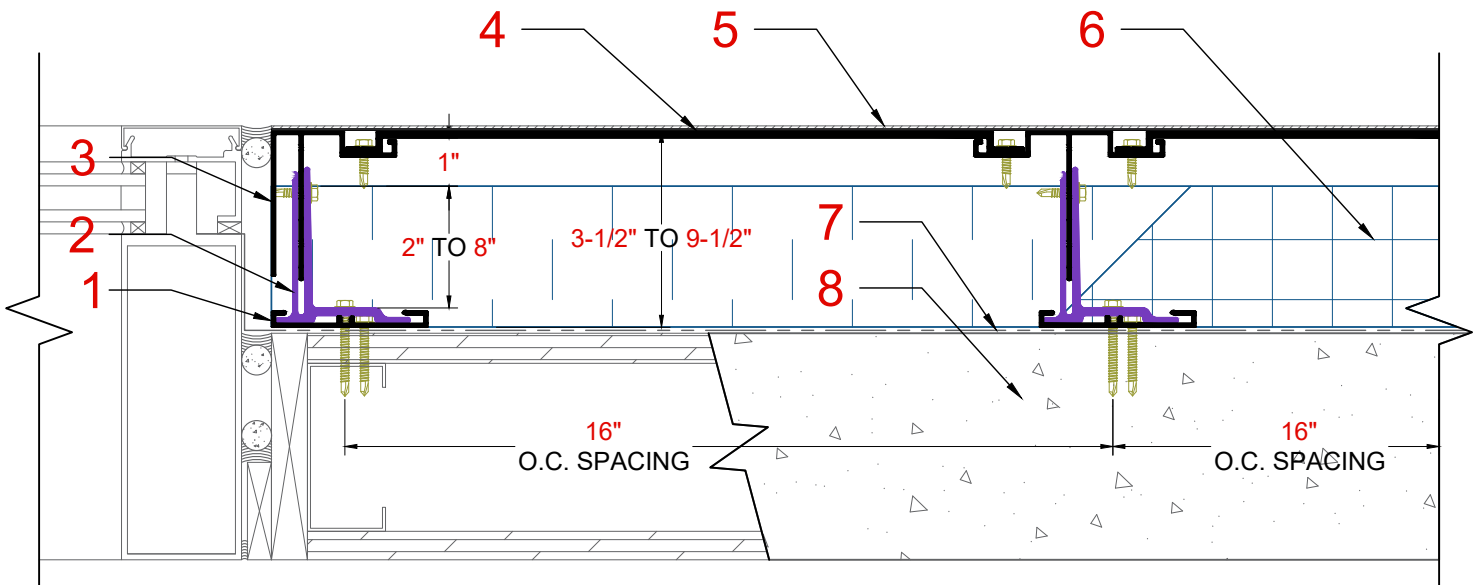

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 Termination Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System Jamb Detail SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022




Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

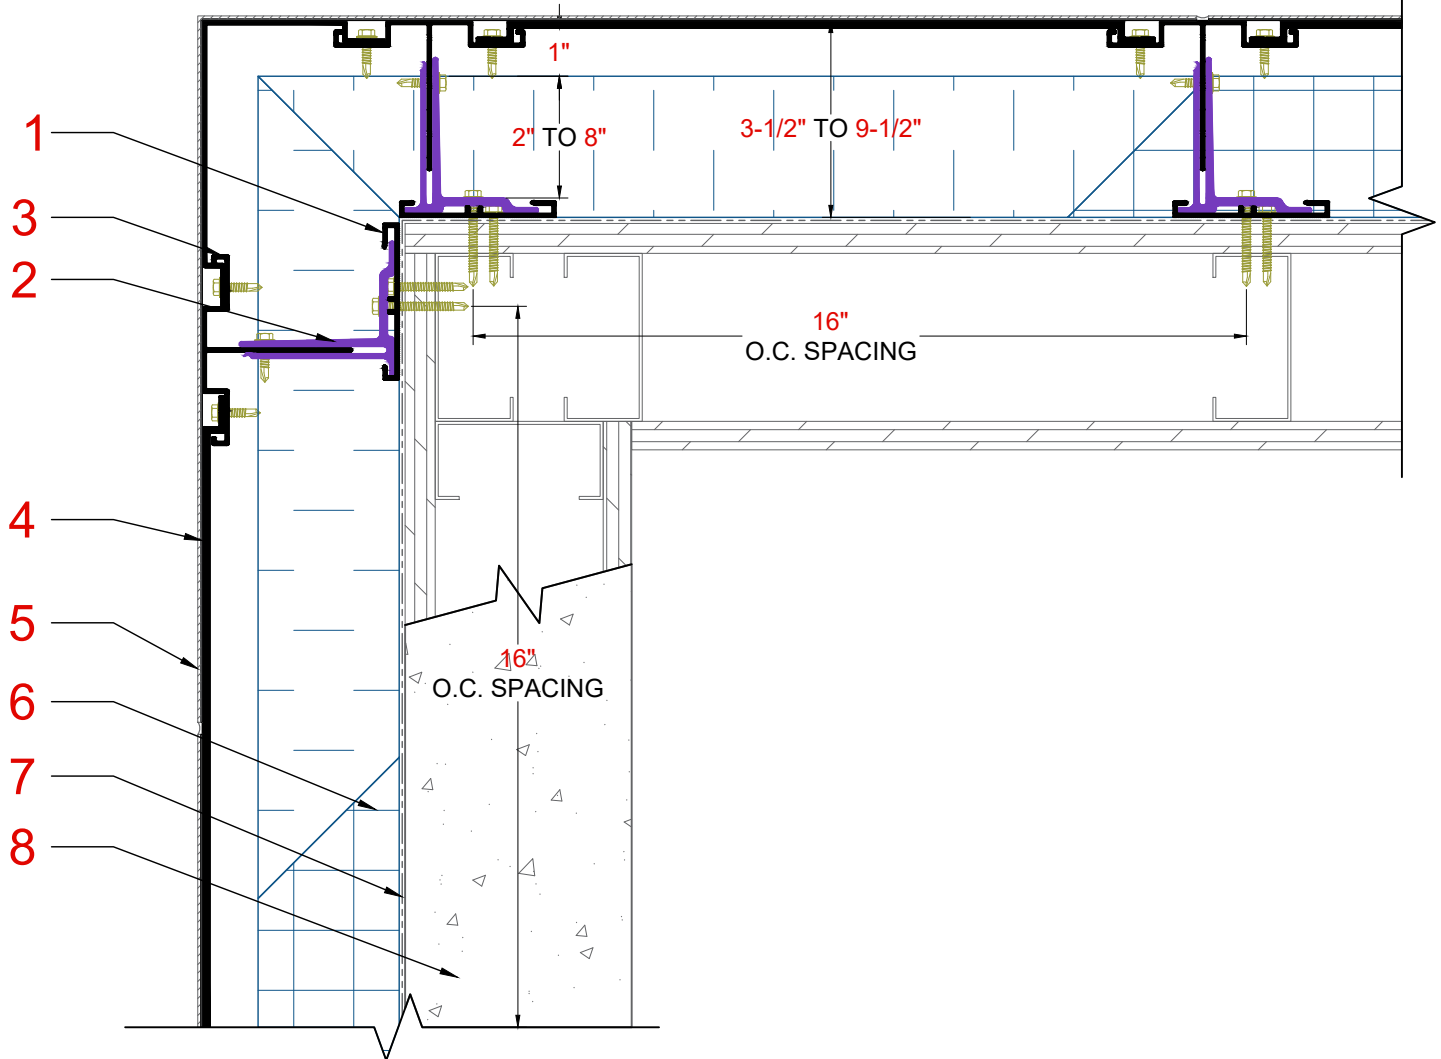

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 T-Track	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System
Outside Corner Detail
SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022




Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

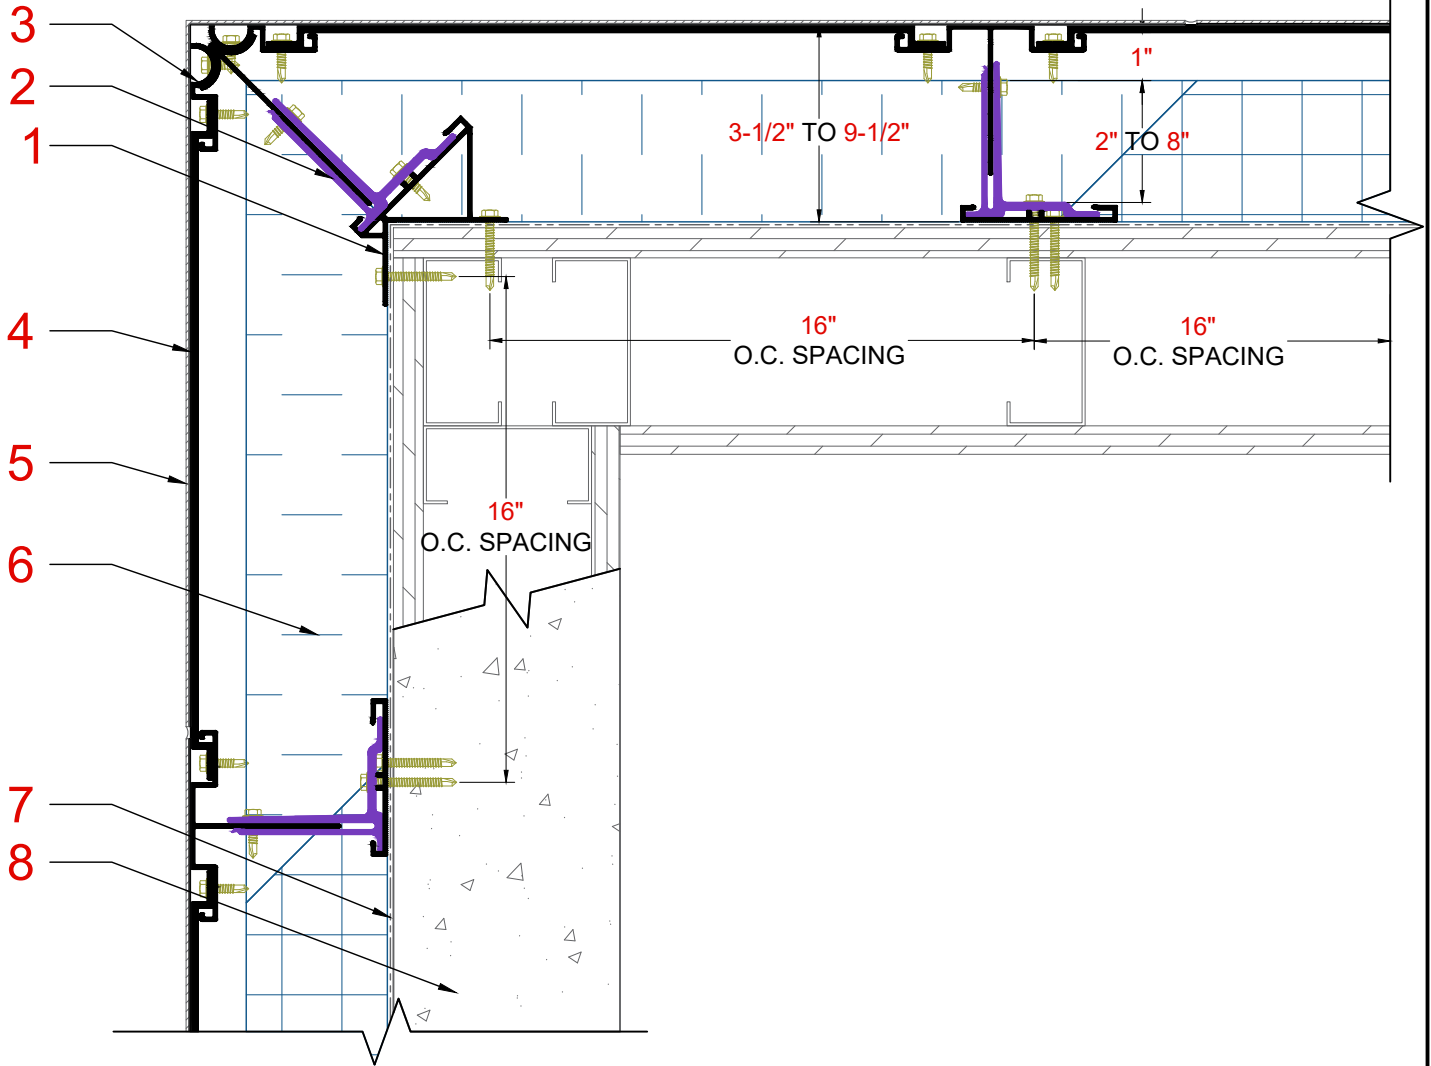

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER	BY: OTHERS
#1 CL 300 Corner Base Track	#5 Panel
#2 THERMAClip™	#6 Insulation
#3 CL 300 Corner	#7 Moisture Barrier
#4 Flush-Mount (Continuous 10')	#8 Masonry/Stud Wall

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System
Outside Corner Detail
SCALE: 3" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022




Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.

CL 300

Thermally Isolated Adjustable Cladding Support System Continuous Rigid Backing/Panel Support

PANEL THICKNESS AS LOW AS 1mm
MOUNTED VIA SELF ADHERED GLUE OR FACE FASTENING

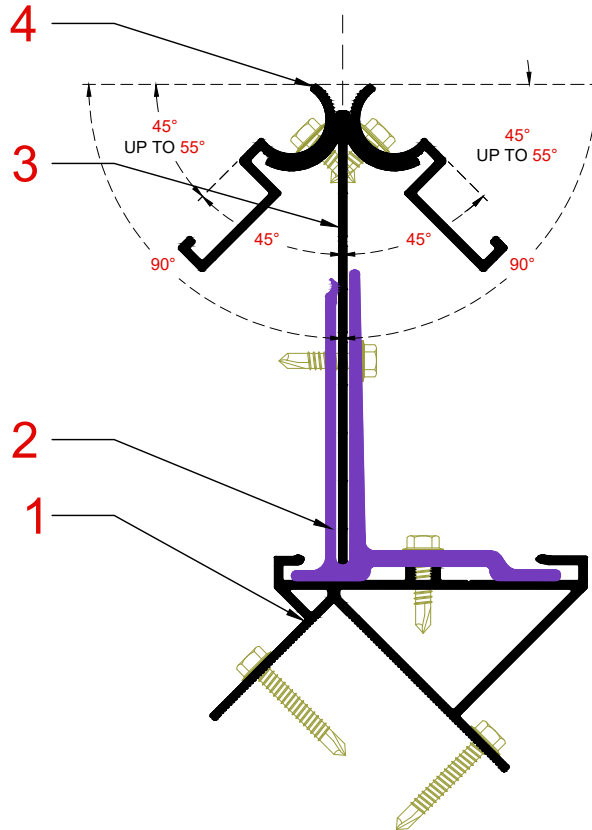

ANY PRODUCT MAY BE APPLIED OVER CL 300 SYSTEM
SYSTEM CAN BE INSTALLED HORIZONTALLY, VERTICALLY, OR BOTH

PATENTS: US10,893,647 B1, US10,689,845 B1, US10,900,239 B1, US20,210,277,665 A1, US10,253,507 B1, US10,260,240 B1, US10,787,817 B1, USD872,883 S1, USD935,059 S1, USD872,883 S1. Utility Patents Pending, Design Patents Pending.

LEGEND:

Provided By: MANUFACTURER		
#1 CL 300 Corner Base Track		
#2 THERMAClip™		
#3 CL 300 Corner T-Stem		
#4 CL 300 Corner Half-T(2)		

FASTENER TYPES:

STUD WALL
#10 HWH SDS TEK3



FASTENER SIZE ADJUSTED BY STRUCTURAL ENGINEER

CL 300 - Thermally Isolated Cladding Support System

Range of Motion
SCALE: 6" = 1' - 0"

SYSTEM SHOWN:
300

DATE: 03-22-2022



Confidential Document: Property of CLADIATOR. Any transfer of this document without the express written permission of CLADIATOR is unlawful. This document includes: Originals, duplicates, and electronic versions. All are exclusive. Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but CLADIATOR shall have no responsibility or liability for results obtained or damages resulting from such use. CLADIATOR grants no license under, and shall have no responsibility or liability for infringement of, any patent, proprietary right. Sales of CLADIATOR products shall be independent and subject exclusively to warranties set forth in CLADIATOR acknowledgment. The foregoing may be waived or modified only in writing by an CLADIATOR officer.