


EVAC-105 / EVDC-105 ENERGY STORAGE

EVERVOLT™ HOME ENERGY STORAGE SYSTEM

Optimize your solar investment and create a more resilient energy future. With EverVolt you can store your excess solar power for when you need it most or sell your surplus energy back to your local utility.

FEATURES

- Modular design with storage options from 6-17kWh to fit your needs*
- User friendly app to easily see your system's performance
- Multiple operating modes
- Three main components for simple installation
- 10-year Panasonic warranty

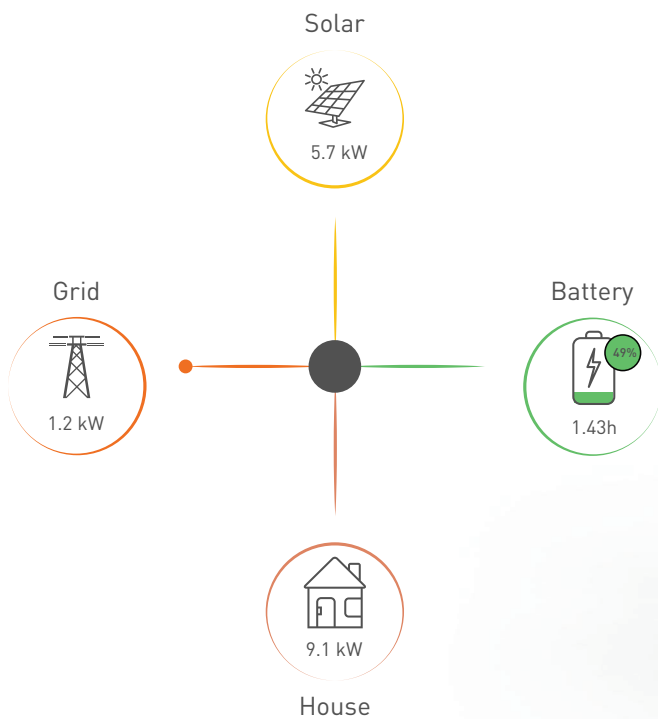

AC coupled version shown above. DC coupled system available in black only.

*Up to 34 kWh achievable using two battery enclosures. Up to 102 kWh achievable with DC coupled system.

EVAC-105 / EVDC-105 ENERGY STORAGE

MODEL INFORMATION

Size	Standard	Plus
AC Coupled Model #	EVAC-105-4	EVAC-105-6
DC Coupled Model #	EVDC-105-4	EVDC-105-6
Total Energy	13.5 kWh	20.3 kWh
Usable Energy ¹	11.4 kWh	17.1 kWh
Battery Continuous Output Power	4.8 kW	7.2 kW
Battery Continuous Output Current	25 A	
Average Backup Capability ^{***}	6 hours	9 hours

¹measured at battery cell level

ELECTRICAL SPECIFICATIONS

	Off-Grid/Backup	With Grid Support (self-supply/TOU)
Maximum Continuous Output Power ²	5.5 kW ²	7.0 kW
Maximum Peak Output Power	7.5 kW	9.6 kW
Rated Output Current (RMS)	23A @120V / 240V	29A @120V / 240V
Nominal AC voltage	120V / 240V	120V / 240V
Grid frequency (auto sensing)	50Hz / 60Hz	50Hz / 60Hz
Overcurrent Protection Device	30A	
Nominal DC Battery Voltage	48V	
Roundtrip efficiency (AC Coupled / DC Coupled)	84% / 89%	

²Up to 13.2 kW continuous power available using three DC coupled systems. AC coupled stacking coming 2020.

MECHANICAL SPECIFICATIONS

Inverter Dimensions (HxWxD)	AC Coupled DC Coupled	33.7 x 18.0 x 6.0 in [856 x 455 x 150 mm] 39 x 17.6 x 5.9 in [990 x 448 x 150 mm]
Battery Cabinet Dimensions (HxWxD)	24.2 x 65.5 x 10 in. [615x1664x245 mm]	
Inverter Weight	AC Coupled DC Coupled	74.0 lbs [33.6 kg] 86.8 lbs [39.4 kg]
Battery Cabinet Weight	106 lbs [48.1 kg]	
Battery Module Weight (each)	55 lbs [25 kg]	
Protection Rating	NEMA 1 Indoor	
Mounting	Wall	
Operating Temperature (charge)	41°F to 131°F [5°C to 55°C]	
Operating Temperature (discharge)	32°F to 122°F [0°C to 50°C]	
Storage Temperature	-13°F to 158°F [-25°C to 70°C]	
Max Altitude	9843 ft. [3000 m]	

GENERAL SPECIFICATIONS

Certifications	"UL 1741SA, UL 1973, UL 1642, UL 9540**, CSA C22.2, IEEE 1547A, IEEE 1547.1, FCC Class B"
Warranty	10 years

*3, 5, 7, and 8 battery options also available

**Certification pending

***Based on average residential electricity consumption for 2017 (<https://www.eia.gov/tools/faqs/>). Consult your Panasonic Authorized Installer for a custom site analysis, as electricity consumption can vary widely based on home size, climate, and the number of energy intensive appliances such as air conditioners and EV chargers.

DIMENSIONS

