Certification.

10

The European Commission has published a certain number of standards intended to control the design and use of rescue and personal protection equipment against falls from height. These standards must be adhered to, and are applicable in all the member states.

EN353-1

EN353-2

a flexible anchor line

CE

EN360

€ EN355

Energy absorbers

EN358

lanyards for work

positioning

type fall arresters

€ EN362

Connectors

EN363

Personal fall protection systems **(€** EN364

Test methods

€ EN365

€ EN397

General requirements for instructions for use, maintenance, periodic examination, repair, marking & packaging

Industrial safety helmets

CE

(EN813

harnesses

EN1497

Rescue

EN


1496

Prime Ship.

We carry nearly 1000 of the fastest moving items in our European warehouses. Most items within this catalogue are in stock and ready to ship the same day for orders placed before 14:00 CET. Your customer service agent will be able to advise on inventory and any items not available for same day shipping.

Personalisation service.

3M[™] Fall Protection offer a customisation service for all of our standard Harnesses and Lanvards on bulk orders. For more information on this service please contact your local sales representative.

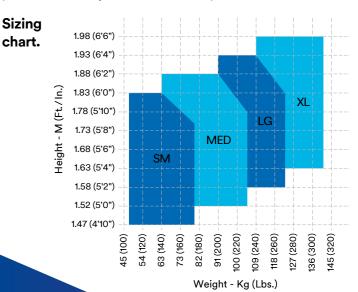

Harness icons.





Chest



Leg

Adjustable

Leg





Shoulders

Adjustable

Shoulder

Point

QC











Adjustable Waist

with Back Pad



Dorsal

D-Ring



Sternal

D-Ring



Positioning

Work



Pectoral

D-Ring

(DL

Adjustable

Chest





Rescue

Attachment

Point







TQC

Adjustable

Waist







Rigid Hip

Padding Loops

TRV













3M™ DBI-SALA® Duo-Lok™ Quick Connect Buckle

Pass Through

(PT)

Quick Connect

Tri-Lock Quick-

3M™ DBI-SALA® **Connect Buckles**

Tongue & Grommet

(TG)

3M™ DBI-SALA® Tri-Lock Revolver™ Connectors

Comfort Padding

3M™ DBI-SALA® TechLite™



The newest Delta Comfort full-body harness offers innovative features such as an improved ergonomic fit and feel, lighterweight buckles and high-strength webbing. Employing a patented No-Tangle triangle pattern creates a frame that allows the harness to easily fall into place when donned. The Delta Comfort harness features liquid-resistant 3M™ DBI-SALA® Delta™ Repel™ Technology Webbing and 3M™ DBI-SALA® Revolver™ Torso Adjusters, which allow for quick adjustment and eradicates loose strap ends.

Applications





3M Fall Protection | (00 800 999 55500





3M™ DBI-SALA® Repel™ **Technology Webbing**

Water repellent to reduce attraction of mould and dirt - also has up to 5 times more resistance to abrasion.

Gear Loops and Connectors

Range of connection and storage points for tools and pouches.

Comfort Padding

To the underside of the shoulder straps, hips and legs.

3M™ DBI-SALA® Revolver™ **Torso Adjusters**

These innovative adjusters have patent pending. Simple and fast adjustment that eliminates loose ends and locks into place preventing slippage.

3M™ DBI-SALA® Tech-Lite™ **Quick Connect Buckles**

Lightweight aluminium alloy buckles for fast and easy connections. Other connections available (Pass Through models also available).

Stand Up Dorsal D-ring


Stands-up dorsal D-ring, ensures fast, easy and safe connections to your fall arrest system.

Rigid Belt

Allows for 27 kg of tools without collapsing.

Protected Labels

A Velcro® cover protects harness labels.

















140 kg.

(€ EN361



3M™ DBI-SALA® Delta™ Comfort Harness



S

XL

*	

0

PT

PT

PT

V	
No.	

(€

kg

1.40

1.45

1.55

(€ EN361

Delta Comfort Harn with Quick Connect	
	1



	∢···· ≻		0	kg
1112959	S	@	@	1.60
1112958	U	@	@	1.65
1112960	XL	@	@	1.75

3M™ DBI-SALA® Delta™ Comfort Harness with Belt



	∢····· ≻		0	0	kg
1112962	S	e	e	PT	2.35
1112961	U	et	e	PT	2.40

€ EN358

(E

Delta Comfort Harness with Belt & Quick Connect Buckles



	∢····· ▶		0		kg
1112965	S	QC)	@	@	2.55
1112964	U	QC	@	@	2.60
1112966	XL	@	@	@	2.70

Delta Comfort Harness

1112956

1112955

1112957




	∢···· ≻		0	kg
1112947	S	PT	PT	1.50
1112946	U	F	P	1.55
1112948	XL	PT	PT	1.65

Delta Comfort Harness with Quick Connect Buckles



	∢···· ≻		0	kg
1112953	S	@	@	1.70
1112952	U	@	@	1.75
1112954	XL	@	@C	1.85

Delta Comfort Rescue Harness with Belt



	∢···· ≻		0	kg
1112950	s	PT	PT	1.70
1112949	U	e	e	1.75
1112951	XL	e	PT	1.85

3M™ DBI-SALA® Work Positioning Spreader **Bar Lanyard**



		○−D			211000
	∢···· ≻	0	0	0	kg
KF71201466	45 mm	8	19 mm	S	1.30

Confined space lanyard for use with rescue harness incorporating shoulder D-rings. Use for vertical lifts in confined space or rescue situations. Built in spreader bar keeps shoulder straps from being pulled in during use.

(€