

Met.


inLINE-S
DATA SHEET

Met.

inLINE-S

APPLICATIONS

- Retail Lighting
- Office Lighting
- General Lighting
- Area Lighting
- Hotel Lighting
- Façade Lighting


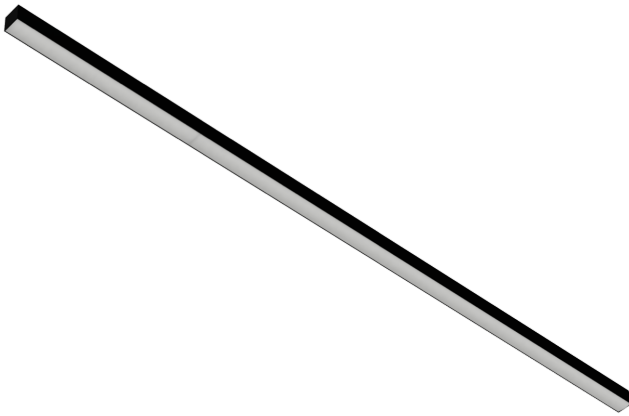


Model Number:	L11130-4-10-A---O-80TR-E
Light Source:	LED
Luminaire total power (W):	30W
Lamp luminous flux*:	4676 lm
Luminaire luminous flux*:	3740 lm
Luminaire efficacy*:	124 lm/W
Power Factor:	> 0.96
Beam Angle:	90 °
Luminaire case temperature @ 25° C ambient temperature:	< 45°
UGR Based on Illumination system design:	< 30
Rated useful life*:	50000 hours LM 80 T21 @ 85
Correlated colour temperature*:	4000 Kelvin
Colour Rendering Index min:	Ra > 80
Chromaticity tolerance (initial MacAdam)*:	5
Body Construction:	Aluminium
Finish:	Powder Coated
Lens Cover:	PMMA
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV
Flicker Free control system (No Stroboscopic effect):	Yes
Additional surge protection:	Optional
Environmental ambient temperature:	-5° C to +35° C
Rated supply voltage:	220-240 V
Mains frequency:	50 / 60 Hz



Met.

inLINE-S

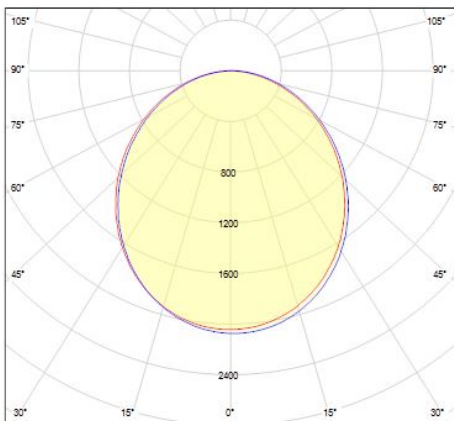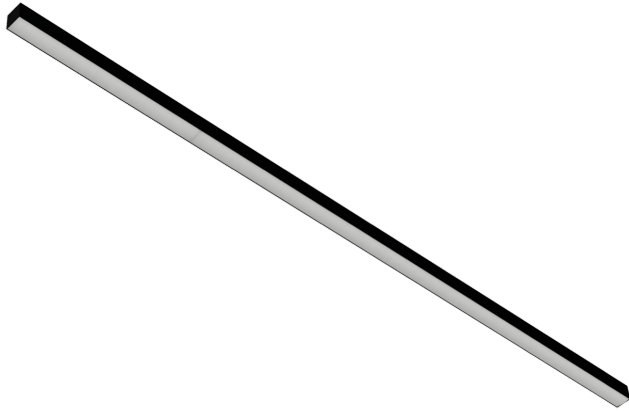

Mounting type:	Baffle Ceiling Mounting Plate
Adjustable mounting:	Optional
Electrical Connection type:	1.5m cable with leads
Mechanical impact protection:	IK 04
Degree of protection:	IP 20
Class of protection:	Class 1
Additional safety and performance protection:	No
Body Colour:	Etch Black
Dimensions:	1000mm X 35mm X 35mm
Weight :	+/- 1.2kg
Dimming:	Optional
Emergency Backup:	Optional
Quality management traceability:	Serialisation, Track and Trace
Spares availability post purchase :	5 years
Serviceable for repairs and maintenance:	Yes up to component level
Upgradable:	No
Approximate product life base on 12hour usage:	5 years
Warranty :	Limited Three-year/50000-hour Warranty (degradation based on LM-80 - TM-21 @ 85°)
Performance Warranty :	No
Country of origin :	South Africa